

THIRD QUARTER 1993

K-AREA ACID/CAUSTIC BASIN GROUNDWATER MONITORING REPORT (U)

PUBLICATION DATE: DECEMBER 1993

Authorized Derivative Classifier:

Michele Bullington



WESTINGHOUSE SAVANNAH RIVER COMPANY
SAVANNAH RIVER SITE
AIKEN, SC 29808

Prepared for the U.S. Department of Energy under Contract No. DE-AC09-89SR10038

MASTER

g78

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

Abstract

During third quarter 1993, samples from the KAC monitoring wells at the K-Area Acid/Caustic Basin were collected and analyzed for indicator parameters, groundwater quality parameters, parameters indicating suitability as drinking water, and other constituents. Monitoring results that exceeded the final Primary Drinking Water Standards (PDWS) or the Savannah River Site (SRS) flagging criteria or turbidity standard during the quarter are discussed in this report.

Dichloromethane was detected slightly above its final PDWS in well KAC 8 during third quarter 1993. Aluminum exceeded its Flag 2 criterion in wells KAC 4, 6, 7, and 9. Iron exceeded the Flag 2 criterion in wells KAC 4, 6 and 7, and specific conductance exceeded the Flag 2 criterion in well KAC 9. No samples exceeded the SRS turbidity standard.

Contents

	Page
Abstract	iii
List of Figures	vii
List of Tables	vii
Executive Summary	1
Introduction	2
Discussion	3
Groundwater Monitoring Data	3
Analytical Results Exceeding Standards	4
Turbidity Results Exceeding Standards	4
Water Elevations, Flow Directions, and Flow Rates	5
Results for Upgradient vs. Downgradient Wells	6
Conclusions	7
References Cited	8
Errata	9
Appendix A – Final Primary Drinking Water Standards	A-1
Appendix B – Flagging Criteria	B-1
Appendix C – Figures	C-1
Appendix D – Groundwater Monitoring Results Tables	D-1
Appendix E – Data Quality/Usability Assessment	E-1

List of Figures

	Page
1. Location of the K-Area Acid/Caustic Basin at the Savannah River Site	C-2
2. Location of Groundwater Monitoring Wells at the K-Area Acid/Caustic Basin	C-3
3. Water-Elevation Contour Map of the Water Table at the K-Area Acid/Caustic Basin	C-4

List of Tables

	Page
1. Maximum Results for Constituents Exceeding Final Primary Drinking Water Standards	D-5
2. Maximum Results for Constituents Exceeding Half their Final Primary Drinking Water Standards, Other Flag 1 or Flag 2 Criteria, or the SRS Turbidity Standard	D-5
3. Groundwater Monitoring Results for Individual Wells	D-6

Executive Summary

The monitoring wells at the K-Area Acid/Caustic Basin are sampled quarterly as part of the Savannah River Site (SRS) Groundwater Monitoring Program and to comply with the terms of a consent decree signed May 26, 1988, by the U.S. District Court (District of South Carolina, Aiken Division). During third quarter 1993, samples from the monitoring wells were analyzed for indicator parameters, groundwater quality parameters, parameters indicating suitability as drinking water, and other constituents. Monitoring results that exceeded final Primary Drinking Water Standards (PDWS), other SRS flagging criteria, or the SRS turbidity standard are discussed in this report.

During third quarter 1993, dichloromethane, a common laboratory contaminant, was detected above the PDWS in a sample from well KAC 8. Aluminum exceeded its Flag 2 criterion in four wells, iron exceeded the Flag 2 criterion in three wells, and specific conductance exceeded the Flag 2 criterion in KAC 9. No samples exceeded the SRS turbidity standard.

Introduction

The K-Area Acid/Caustic Basin is located in the eastern portion of K Area at the Savannah River Site (SRS) near a tributary of Pen Branch. The basin, constructed in the early 1950s, is an unlined earthen pit that received dilute sulfuric acid and sodium hydroxide solutions and other wastes from several areas within SRS. The basin provided an area for the mixing and neutralization of the dilute solutions before their discharge to nearby streams. The K-Area Acid/Caustic Basin remained in service until new neutralization facilities became operational in 1982 (Heffner and Exploration Resources, 1991).

Four groundwater monitoring wells were installed at the K-Area Acid/Caustic Basin between October 1983 and July 1984. Under the terms of a consent decree signed May 26, 1988, by the U.S. District Court (District of South Carolina, Aiken Division), on June 1, 1988, the basin became subject to requirements of Subtitle C of the Resource Conservation and Recovery Act (RCRA), the South Carolina Hazardous Waste Management Regulations (SCHWMR), and associated regulations. The basin monitoring wells were reevaluated during the summer of 1988 to ensure compliance with SCHWMR. As part of this compliance effort, three additional wells were installed at the K-Area Acid/Caustic Basin in the fall of 1988. The revised Groundwater Quality Assessment Plan (WSRC, 1991), submitted to the South Carolina Department of Health and Environmental Control on April 30, 1991, proposed the installation of two additional water-table wells at the K-Area Acid/Caustic Basin. These wells, KAC 8 and 9, were first sampled during second quarter 1992.

The monitoring wells at the K-Area Acid/Caustic Basin are sampled quarterly as part of the SRS Groundwater Monitoring Program and to comply with the consent decree.

Discussion

Groundwater Monitoring Data

The groundwater sampling procedure was modified beginning fourth quarter 1992 in response to regulatory guidance and advances in sampling equipment design (EPD/EMS, 1992). The modified procedure requires evacuation of a minimum of two well volumes and stabilization of pH, specific conductance, and turbidity prior to sample collection. Stability is established when a minimum of three successive measurements, taken within a given time period, are within a specified tolerance range. If a well pumps dry before two well volumes are purged or before stabilization is achieved, it must be revisited within 24 hours for the data to be considered the result of a single sampling event. On the second visit within 24 hours, samples are taken without purging or stability measurements; thus, these samples may not be representative of the groundwater quality.

A further modification in the procedure is that samples collected for metals analyses are not filtered. Thus, the analyses are for total metals rather than dissolved metals. In addition, variable-speed pumps have been installed in some wells in specific areas that have had a history of elevated metals. Samples from these wells are collected at a slower rate to minimize turbidity, which has been associated with elevated metal levels. Decreased aluminum and iron concentrations as well as lower turbidity values have been observed for samples from wells with variable-speed pumps. Well KAC 1 has a variable-speed pump.

During third quarter 1993, samples from the nine monitoring wells at the K-Area Acid/Caustic Basin were analyzed for indicator parameters, groundwater quality parameters, parameters indicating suitability as drinking water, and other constituents.

This report describes monitoring results that exceeded the Safe Drinking Water Act final Primary Drinking Water Standards (PDWS) set by the U.S. Environmental Protection Agency (EPA) (Appendix A), the South Carolina final PDWS for lead (Appendix A), other SRS Flag 2 criteria (Appendix B), or the SRS turbidity standard. Constituent levels that equal or exceed the final PDWS, screening levels, or Flag 2 criteria are described as *elevated*.

The SRS flagging criteria generally are based on final and proposed PDWS, Secondary Drinking Water Standards, and method detection limits. The final PDWS for individual analytes provided in Appendix A may not always match the SRS flagging criteria provided in Appendix B. The final PDWS are used as guidelines in this compliance report to meet regulatory requirements; the flagging criteria are used by the Environmental Protection Department/Environmental Monitoring Section to identify relative levels of constituents in the groundwater and as guides for scheduling groundwater sampling.

Illustrations of the monitored unit at SRS (Figure 1), the individual monitoring wells (Figure 2), and the flow directions of the groundwater beneath the unit (Figure 3) are in Appendix C. All figures are aligned to true north. Figure 1 includes SRS grid coordinates and latitude/longitude. Figure 2 includes latitude/longitude and Universal Transverse Mercator (UTM) coordinates. Monitoring results as well as analyses that exceeded holding times, the final PDWS, other flagging criteria, or the turbidity standard are presented in Appendix D; and a discussion of data quality and useability is in Appendix E.

Analytical Results Exceeding Standards

Results for analytes that exceeded the final PDWS (see Appendix A) during third quarter 1993 are summarized in Table 1 (Appendix D); dichloromethane, a common laboratory contaminant, was reported just above its PDWS in a sample from well KAC 8.

Constituents that exceeded other Flag 1 or Flag 2 criteria (see Appendix B) during third quarter 1993 are summarized in Table 2 (Appendix D). Aluminum exceeded its Flag 2 criterion in wells KAC 4, 6, 7, and 9, with a maximum concentration of 1,220 $\mu\text{g}/\text{L}$. Iron exceeded the Flag 2 criterion in wells KAC 4, 6, and 7, with a maximum concentration of 793 $\mu\text{g}/\text{L}$. Specific conductance exceeded the Flag 2 criterion in well KAC 9 at a concentration of 670 $\mu\text{S}/\text{cm}$. Many of the analyses this quarter are qualified with the modifier *Y*, indicating that the temperature of the samples upon receipt at the laboratory exceeded 4°C.

Table 3 (Appendix D) presents all of the results for individual wells and indicates those analyses that exceeded holding times or the final PDWS. Modifiers (qualifiers) that may appear in the *Mod* column of Table 3 are defined on pp. D-3 and D-4.

Table 3 also lists the number of well volumes purged from each well during third quarter 1993 at the K-Area Acid/Caustic Basin. Wells KAC 6 and 7 each failed to yield enough water to meet the purging and stabilization criteria. They were sampled within 24 hours. The samplers noted that the water from well KAC 6 was aerated.

Some of the values for earlier quarters presented in Table 1 of this report may differ from the values for those same quarters presented in previous reports because some reanalyses may have been performed by the laboratories after the quarterly reports had gone to press.

Turbidity Results Exceeding Standards

A value of 5 nephelometric turbidity units (NTU), established by EPA (1986) as a general standard for acceptability of groundwater samples, is considered unrealistic for monitoring wells at SRS. Gass (1989) has documented turbidity measurements ranging up to 5,000 NTU from properly designed wells screened in poorly productive formations. During the 1989 RCRA Compliance Evaluation Inspection, officials from EPA Region IV indicated that the SRS turbidity standard of 50 NTU is conservative. These officials also agreed that water-table wells in this area often correspond to nonaquifer formations, rendering development of these wells more difficult due to the low yield and high proportion of mobile fines typical of these formations (Bergren and Bennett, 1989).

During third quarter 1993, well KAC 6 had a laboratory measurement for turbidity between 5 NTU and the SRS standard of 50 NTU.

Water Elevations, Flow Directions, and Flow Rates

Water level elevations in the K-Area Acid/Caustic Basin wells are shown in Figure 3 (Appendix C). Wells KAC 4, 8, and 9 are screened below the water table; their water level elevations were not contoured or considered in the determination of groundwater flow direction or rate. The groundwater flow direction (using UTM coordinates) determined from this quarter's water-level elevations for the other six KAC wells is southwest.

The groundwater flow rate in the water table (Aquifer Zone IIB₂) beneath the K-Area Acid/Caustic Basin is estimated using the following equation:

$$\text{Flow (ft/day)} = \frac{\text{Hydraulic Conductivity (ft/day)}}{\text{Porosity (unitless)}} \times \frac{dh \text{ (ft)}}{dl \text{ (ft)}}$$

A hydraulic conductivity constant of 10 ft/day (Geraghty & Miller, Inc., 1990) is a conservative estimate (i.e., the actual hydraulic conductivity should be somewhat less than 10 ft/day). The effective porosity value is estimated at 20% (Killian et al., 1987), dh is the difference in head, and dl is the length of the flow path to the nearest foot. Flow rate estimates vary depending on the vertical gradient between wells, the size of the area under consideration, and the number of data points. For this reason, the estimation of flow rate should be considered accurate only to an order of magnitude.

Flow rate estimates are calculated as follows: flow rate per day is calculated to two significant figures using the above equation. This value is then multiplied by 365 and rounded to two significant figures for the flow rate per year.

Using the above equation with data from the six non-submerged KAC monitoring wells, with $dh = 2$ ft and $dl = 99$ ft (see Figure 3 in Appendix C), the flow rate estimate for groundwater in the water table beneath the K-Area Acid/Caustic Basin is as follows:

$$\frac{10}{0.20} \times \frac{2}{99} = 1.0 \text{ ft/day}$$

$$1.0 \text{ ft/day} \times 365 \text{ days} \approx 370 \text{ ft/yr}$$

The three wells, KAC 4, 8, and 9, that are screened below the water table can be seen in Figure 3 to be downgradient from the facility and are able to detect groundwater contamination adequately.

Well KAC 8 has exhibited a higher water elevation trend than the other two submerged wells (KAC 4 and 9). Historical data indicate a ponding or losing stream effect in this area, creating a mound of groundwater to the east of the basin. This could be attributed to effects of the K-Area outfall effluent stream south of KAC 8. The influx of additional water into the water table aquifer in close proximity to this manmade stream has created a mound effect around KAC 8, resulting in a higher water elevation reading.

Results for Upgradient vs. Downgradient Wells

Wells KAC 3 and 5 are the upgradient wells. Wells KAC 1, 2, 4, 6, 7, 8, and 9 are downgradient. No constituents exceeded the final PDWS, other Flag 2 criteria, or the SRS turbidity standard in the upgradient wells.

Conclusions

Dichloromethane, a common laboratory contaminant, was reported above the final PDWS in one well at the K-Area Acid/Caustic Basin during third quarter 1993. Aluminum exceeded the Flag 2 criterion in downgradient wells KAC 4, 6, 7, and 9; iron exceeded the Flag 2 criterion in wells KAC 4, 6, and 7; and specific conductance exceeded the Flag 2 criterion in well KAC 9. Generally, constituents found in downgradient wells but not upgradient wells at a waste management unit are considered products of the waste management unit.

Well KAC 6 had a turbidity value between 5 and 50 NTU. Wells KAC 6 and 7 did not yield two well volumes prior to sampling.

References Cited

Bergren, C. L., and C. B. Bennett, 1989. **Assessment of SRS Groundwater Monitoring Wells Impacted by Turbidity**, WSRC-RP-89-891. Westinghouse Savannah River Company, Aiken, SC.

EPA (U.S. Environmental Protection Agency), 1986. **RCRA Ground Water Monitoring Technical Enforcement Guidance Document**, OSWER-9950.1. Washington, DC.

EPD/EMS (Environmental Protection Department/Environmental Monitoring Section), 1992. **Hydrogeologic Data Collection Procedures and Specifications: Sampling Groundwater Monitoring Wells**, Manual 3Q5, Chapter 14, Revision 0. Environmental Protection Department, Environmental Monitoring Section, Savannah River Site, Aiken, SC.

Gass, T. E., 1989. *Monitoring Wells in Non-Aquifer Formations*. **Water Well Journal**, 43(2):27-29.

Heffner, J. D., and Exploration Resources, Inc., 1991. **Technical Summary of Groundwater Quality Protection Program at the Savannah River Site (1952-1986), Volume I—Site Geohydrology and Waste Sites**, DPSP-88-1002. Westinghouse Savannah River Company, Aiken, SC.

WSRC (Westinghouse Savannah River Company), 1991. **F-, H-, K-, and P-Area Acid/Caustic Basins Groundwater Quality Assessment Plan**, WSRC-TR-91-178, Revision 1.0. Westinghouse Savannah River Company, Aiken, SC.

Errata

Third Quarter 1992:

- Prior to third quarter 1992, the results of certain analyses for *nitrate-nitrite as nitrogen* were reported incorrectly by the General Engineering laboratory as *nitrate as nitrogen* results. The analyses in the results tables beginning this quarter are reported correctly (*nitrate-nitrite* results have been separated from true *nitrate* results).

Fourth Quarter 1992:

- No errata have been reported.

First Quarter 1993:

- No errata have been reported.

Second Quarter 1993:

- No errata have been reported.

Appendix A – Final Primary Drinking Water Standards

Final Primary Drinking Water Standards

<u>Analyte</u>	<u>Unit</u>	<u>Level</u>	<u>Status</u>	<u>Source</u>
Antimony	$\mu\text{g/L}$	6	Final	EPA, 1992b
Arsenic	$\mu\text{g/L}$	50	Final	EPA, 1992a
Asbestos	fibers/L	7,000,000	Final	EPA, 1992a
Barium	$\mu\text{g/L}$	2,000	Final	EPA, 1992a
Benzene	$\mu\text{g/L}$	5	Final	EPA, 1992a
Benzo[a]pyrene	$\mu\text{g/L}$	0.2	Final	EPA, 1992b
Beryllium	$\mu\text{g/L}$	4	Final	EPA, 1992b
Bis(2-ethylhexyl) phthalate	$\mu\text{g/L}$	6	Final	EPA, 1992b
Bromodichloromethane	$\mu\text{g/L}$	100 ^a	Final	EPA, 1992a
Bromoform	$\mu\text{g/L}$	100 ^a	Final	EPA, 1992a
2-sec-Butyl-4,6-dinitrophenol	$\mu\text{g/L}$	7	Final	EPA, 1992b
Cadmium	$\mu\text{g/L}$	5	Final	EPA, 1992a
Carbon tetrachloride	$\mu\text{g/L}$	5	Final	EPA, 1992a
Chlordane	$\mu\text{g/L}$	2	Final	EPA, 1992a
Chlorobenzene	$\mu\text{g/L}$	100	Final	EPA, 1992a
Chloroethene (Vinyl chloride)	$\mu\text{g/L}$	2	Final	EPA, 1992a
Chloroform	$\mu\text{g/L}$	100 ^a	Final	EPA, 1992a
Chromium	$\mu\text{g/L}$	100	Final	EPA, 1992a
Copper	$\mu\text{g/L}$	1,300	Final	EPA, 1992a
Cyanide	$\mu\text{g/L}$	200	Final	EPA, 1992b
Dibromochloromethane	$\mu\text{g/L}$	100 ^a	Final	EPA, 1992a
Dibromochloropropane	$\mu\text{g/L}$	0.2	Final	EPA, 1992a
1,2-Dibromoethane (Ethylene dibromide)	$\mu\text{g/L}$	0.05	Final	EPA, 1992a
1,2-Dichlorobenzene	$\mu\text{g/L}$	600	Final	EPA, 1992a
1,4-Dichlorobenzene	$\mu\text{g/L}$	75	Final	EPA, 1992a
1,2-Dichloroethane	$\mu\text{g/L}$	5	Final	EPA, 1992a
1,1-Dichloroethene	$\mu\text{g/L}$	7	Final	EPA, 1992a
1,2-Dichloroethene	$\mu\text{g/L}$	50	Final	EPA, 1992b
cis-1,2-Dichloroethene	$\mu\text{g/L}$	70	Final	EPA, 1992a
trans-1,2-Dichloroethene	$\mu\text{g/L}$	100	Final	EPA, 1992a
Dichloromethane (Methylene chloride)	$\mu\text{g/L}$	5	Final	EPA, 1992b
2,4-Dichlorophenoxyacetic acid	$\mu\text{g/L}$	70	Final	EPA, 1992a
1,2-Dichloropropane	$\mu\text{g/L}$	5	Final	EPA, 1992a
Endrin	$\mu\text{g/L}$	2	Final	EPA, 1992b
Ethylbenzene	$\mu\text{g/L}$	700	Final	EPA, 1992a
Fluoride	$\mu\text{g/L}$	4,000	Final	EPA, 1992a
Gross alpha ^b	pCi/L	1.5E + 01	Final	EPA, 1992a
Heptachlor	$\mu\text{g/L}$	0.4	Final	EPA, 1992a
Heptachlor epoxide	$\mu\text{g/L}$	0.2	Final	EPA, 1992a
Hexachlorobenzene	$\mu\text{g/L}$	1	Final	EPA, 1992b
Hexachlorocyclopentadiene	$\mu\text{g/L}$	50	Final	EPA, 1992b
Lead	$\mu\text{g/L}$	50	Final	SCDHEC, 1981
Lindane	$\mu\text{g/L}$	0.2	Final	EPA, 1992a
Mercury	$\mu\text{g/L}$	2	Final	EPA, 1992a
Methoxychlor	$\mu\text{g/L}$	40	Final	EPA, 1992a
Nickel	$\mu\text{g/L}$	100	Final	EPA, 1992b
Nitrate as nitrogen	$\mu\text{g/L}$	10,000	Final	EPA, 1992a
Nitrate-nitrite as nitrogen	$\mu\text{g/L}$	10,000	Final	EPA, 1992a
Nitrite as nitrogen	$\mu\text{g/L}$	1,000	Final	EPA, 1992a
Nonvolatile beta ^c	pCi/L	5E + 01	Final	EPA, 1977
PCBs ^d	$\mu\text{g/L}$	0.5	Final	EPA, 1992a
Pentachlorophenol	$\mu\text{g/L}$	1	Final	EPA, 1992a
Radium, total (Radium-226 and -228)	pCi/L	5E + 00	Final	EPA, 1992a

<u>Analyte</u>	<u>Unit</u>	<u>Level</u>	<u>Status</u>	<u>Source</u>
Selenium	$\mu\text{g/L}$	50	Final	EPA, 1992a
Strontium-89/90 ^a	pCi/L	8E + 00	Final	EPA, 1992a
Strontium-90	pCi/L	8E + 00	Final	EPA, 1992a
Styrene	$\mu\text{g/L}$	100	Final	EPA, 1992a
2,3,7,8-TCDD	$\mu\text{g/L}$	0.00003	Final	EPA, 1992b
Tetrachloroethylene	$\mu\text{g/L}$	5	Final	EPA, 1992a
Thallium	$\mu\text{g/L}$	2	Final	EPA, 1992b
Toluene	$\mu\text{g/L}$	1,000	Final	EPA, 1992a
Total trihalomethanes	$\mu\text{g/L}$	100	Final	EPA, 1992a
Toxaphene	$\mu\text{g/L}$	3	Final	EPA, 1992a
2,4,5-TP (Silvex)	$\mu\text{g/L}$	50	Final	EPA, 1992a
1,2,4-Trichlorobenzene	$\mu\text{g/L}$	70	Final	EPA, 1992b
1,1,1-Trichloroethane	$\mu\text{g/L}$	200	Final	EPA, 1992a
1,1,2-Trichloroethane	$\mu\text{g/L}$	5	Final	EPA, 1992b
Trichloroethylene	$\mu\text{g/L}$	5	Final	EPA, 1992a
Tritium	pCi/mL	2E + 01	Final	EPA, 1992a
Xylenes	$\mu\text{g/L}$	10,000	Final	EPA, 1992a

- ^a This value is the drinking water standard for total trihalomethanes (the sum of bromoform, bromodichloromethane, chloroform, and dibromochloromethane).
- ^b The standard given is for gross alpha including radium-226 but excluding radon and uranium.
- ^c This is the screening level above which providers of public drinking water should perform analyses for specific man-made radionuclides. The standard for the total dose equivalent from all such radionuclides is 4 mrem per year.
- ^d Analyses were conducted in 1992 for the following: PCB 1016, PCB 1221, PCB 1232, PCB 1242, PCB 1248, PCB 1254, and PCB 1260.
- ^e For double radionuclide analyses where each separate radionuclide has its own standard, the more stringent standard is used.

References

EPA (U.S. Environmental Protection Agency), 1977. *National Interim Primary Drinking Water Regulations*, EPA-570/9-76-003. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1992a. *National Primary Drinking Water Regulations, Code of Federal Regulations*, Title 40, Part 141, pp. 589-729. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1992b. *National Primary Drinking Water Regulations—Synthetic Organic Chemicals and Inorganic Chemicals; National Primary Drinking Water Regulations Implementation*. *Federal Register*, July 17, 1992, pp. 31776-31849. Washington, DC.

SCDHEC (South Carolina Department of Health and Environmental Control), 1981. *State Primary Drinking Water Regulations*, R.61-58.5. Columbia, SC.

Appendix B – Flagging Criteria

Flagging Criteria

The Savannah River Site Environmental Protection Department/Environmental Monitoring Section (EPD/EMS) flagging criteria are as follows:

- Flag 2 criteria for constituents equal the Safe Drinking Water Act (SDWA) final Primary Drinking Water Standard (PDWS), the SDWA proposed PDWS, or the SDWA Secondary Drinking Water Standard (SDWS). If a constituent does not have a drinking water standard, the Flag 2 criterion equals 10 times the method detection limit (MDL) calculated as the 90th percentile detection limit obtained recently by one of the primary analytical laboratories.
- Flag 1 criteria for constituents equal one-half of the final PDWS, one-half the proposed PDWS, or one-half the SDWS. If a constituent does not have a drinking water standard, the Flag 1 criterion equals 5 times the MDL calculated as the 90th percentile detection limit obtained recently by one of the primary analytical laboratories.
- Flag 0 criteria are assigned to constituent levels below Flag 1 criteria, constituent levels below the sample detection limits, or constituents having no flagging criteria.

The following parameters are not assigned flagging criteria: alkalinity, calcium, color, corrosivity, Eh, magnesium, odor, potassium, silica, sodium, total dissolved solids, total phosphates (as P), total phosphorus, and turbidity. In addition, common laboratory contaminants and cleaners including some phthalates, ketones, and toluene are not assigned flagging criteria.

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
Acenaphthene	µg/L	50	100	EPA Method 8270
Acenaphthylene	µg/L	50	100	EPA Method 8270
Acetone	µg/L	500	1,000	EPA Method 8240
Acetonitrile (Methyl cyanide)	µg/L	500	1,000	EPA Method 8240
Acetophenone	µg/L	50	100	EPA Method 8270
2-Acetylaminofluorene	µg/L	50	100	EPA Method 8270
Acrolein	µg/L	100	200	EPA Method 8240
Acrylonitrile	µg/L	100	200	EPA Method 8240
Actinium-228	pCi/L	1.64E + 03	3.27E + 03	Proposed PDWS (EPA, 1991)
Aldrin	µg/L	0.25	0.5	EPA Method 8080
Alkalinity (as CaCO ₃)		No flag	No flag	Set by EPD/EMS
Allyl chloride	µg/L	250	500	EPA Method 8240
Aluminum	µg/L	25	50	SDWS (EPA, 1992c)
Americium-241	pCi/L	3.17E + 00	6.34E + 00	Proposed PDWS (EPA, 1991)
Americium-243	pCi/L	3.19E + 00	6.37E + 00	Proposed PDWS (EPA, 1991)
4-Aminobiphenyl	µg/L	50	100	EPA Method 8270
Ammonia	µg/L	500	1,000	APHA Method 417B
Ammonia nitrogen	µg/L	500	1,000	EPA Method 350.1
Aniline	µg/L	50	100	EPA Method 8270
Anthracene	µg/L	50	100	EPA Method 8270
Antimony	µg/L	3	6	Final PDWS (EPA, 1992b)
Antimony-125	pCi/L	1.5E + 02	3E + 02	Final PDWS (EPA, 1977)
Aramite	µg/L	50	100	EPA Method 8270
Arsenic	µg/L	25	50	Final PDWS (EPA, 1992a)

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
Asbestos	Fibers/L	3,500,000	7,000,000	Final PDWS (EPA, 1992a)
Azobenzene	$\mu\text{g/L}$	50	100	EPA Method 625
Barium	$\mu\text{g/L}$	1,000	2,000	Final PDWS (EPA, 1992a)
Barium-140	pCi/L	$4.5\text{E}+01$	$9\text{E}+01$	Final PDWS (EPA, 1977)
Benzene	$\mu\text{g/L}$	2.5	5	Final PDWS (EPA, 1992a)
alpha-Benzene hexachloride	$\mu\text{g/L}$	0.25	0.5	EPA Method 8080
beta-Benzene hexachloride	$\mu\text{g/L}$	0.25	0.5	EPA Method 8080
delta-Benzene hexachloride	$\mu\text{g/L}$	0.25	0.5	EPA Method 8080
Benzidine	$\mu\text{g/L}$	250	500	EPA Method 8270
Benzo[a]anthracene	$\mu\text{g/L}$	0.05	0.1	Proposed PDWS (EPA, 1990)
Benzo[b]fluoranthene	$\mu\text{g/L}$	0.1	0.2	Proposed PDWS (EPA, 1990)
Benzo(k)fluoranthene	$\mu\text{g/L}$	0.1	0.2	Proposed PDWS (EPA, 1990)
Benzoic acid	$\mu\text{g/L}$	250	500	EPA Method 8270
Benzo[g,h,i]perylene	$\mu\text{g/L}$	50	100	EPA Method 8270
Benzo[a]pyrene	$\mu\text{g/L}$	0.1	0.2	Final PDWS (EPA, 1992b)
1,4-Benzoquinone	$\mu\text{g/L}$	50	100	EPA Method 8270
Benzyl alcohol	$\mu\text{g/L}$	50	100	EPA Method 8270
Beryllium	$\mu\text{g/L}$	2	4	Final PDWS (EPA, 1992b)
Beryllium-7	pCi/L	$3\text{E}+03$	$6\text{E}+03$	Final PDWS (EPA, 1977)
Bis(2-chloroethoxy) methane	$\mu\text{g/L}$	50	100	EPA Method 8270
Bis(2-chloroethyl) ether	$\mu\text{g/L}$	50	100	EPA Method 8270
Bis(2-chloroisopropyl) ether	$\mu\text{g/L}$	50	100	EPA Method 8270
Bis(chloromethyl) ether	$\mu\text{g/L}$	50	100	EPA Method 8270
Bis(2-ethylhexyl) phthalate	$\mu\text{g/L}$	3	6	Final PDWS (EPA, 1992b)
Bromide	$\mu\text{g/L}$	5,000	10,000	EPA Method 300.0
Bromodichloromethane	$\mu\text{g/L}$	50	100	Final PDWS (EPA, 1992a)
Bromoform	$\mu\text{g/L}$	50	100	Final PDWS (EPA, 1992a)
Bromomethane (Methyl bromide)	$\mu\text{g/L}$	5	10	EPA Method 8240
4-Bromophenyl phenyl ether	$\mu\text{g/L}$	50	100	EPA Method 8270
2-sec-Butyl-4,6-dinitrophenol	$\mu\text{g/L}$	3.5	7	Final PDWS (EPA, 1992b)
Butylbenzyl phthalate	$\mu\text{g/L}$	No flag	No flag	Set by EPD/EMS
Cadmium	$\mu\text{g/L}$	2.5	5	Final PDWS (EPA, 1992a)
Calcium		No flag	No flag	Set by EPD/EMS
Carbon disulfide	$\mu\text{g/L}$	5	10	EPA Method 8240
Carbon tetrachloride	$\mu\text{g/L}$	2.5	5	Final PDWS (EPA, 1992a)
Carbon-14	pCi/L	$1\text{E}+03$	$2\text{E}+03$	Final PDWS (EPA, 1977)
Carbonate		No flag	No flag	Set by EPD/EMS
Cerium-141	pCi/L	$1.5\text{E}+02$	$3\text{E}+02$	Final PDWS (EPA, 1977)
Cerium-144	pCi/L	$1.31\text{E}+02$	$2.61\text{E}+02$	Proposed PDWS (EPA, 1991)
Cesium-134 ^b	pCi/L	$4.07\text{E}+01$	$8.13\text{E}+01$	Proposed PDWS (EPA, 1991)
Cesium-137	pCi/L	$1\text{E}+02$	$2\text{E}+02$	Final PDWS (EPA, 1977)
Chlordane	$\mu\text{g/L}$	1	2	Final PDWS (EPA, 1992a)
Chloride	$\mu\text{g/L}$	125,000	250,000	SDWS (EPA, 1992c)
4-Chloroaniline	$\mu\text{g/L}$	50	100	EPA Method 8270
Chlorobenzene	$\mu\text{g/L}$	50	100	Final PDWS (EPA, 1992a)
Chlorobenzilate	$\mu\text{g/L}$	50	100	EPA Method 8270
Chloroethane	$\mu\text{g/L}$	5	10	EPA Method 8240
Chloroethene (Vinyl chloride)	$\mu\text{g/L}$	1	2	Final PDWS (EPA, 1992a)
Chloroethyl vinyl ether	$\mu\text{g/L}$	5	10	EPA Method 8240
2-Chloroethyl vinyl ether	$\mu\text{g/L}$	5	10	EPA Method 8240
Chloroform	$\mu\text{g/L}$	50	100	Final PDWS (EPA, 1992a)
4-Chloro-m-cresol	$\mu\text{g/L}$	50	100	EPA Method 8270
Chloromethane (Methyl chloride)	$\mu\text{g/L}$	5	10	EPA Method 8240
2-Chloronaphthalene	$\mu\text{g/L}$	50	100	EPA Method 8240
2-Chlorophenol	$\mu\text{g/L}$	50	100	EPA Method 8270

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
4-Chlorophenyl phenyl ether	µg/L	50	100	EPA Method 8270
Chloroprene	µg/L	1,000	2,000	EPA Method 8240
Chromium	µg/L	50	100	Final PDWS (EPA, 1992a)
Chromium-51	pCi/L	3E + 03	6E + 03	Final PDWS (EPA, 1977)
Chrysene	µg/L	0.1	0.2	Proposed PDWS (EPA, 1990)
Cobalt	µg/L	20	40	EPA Method 6010
Cobalt-57	pCi/L	5E + 02	1E + 03	Final PDWS (EPA, 1977)
Cobalt-58	pCi/L	4.5E + 03	9E + 03	Final PDWS (EPA, 1977)
Cobalt-60	pCi/L	5E + 01	1E + 02	Final PDWS (EPA, 1977)
Color		No flag	No flag	Set by EPD/EMS
Copper	µg/L	650	1,300	Final PDWS (EPA, 1992a)
Corrosivity		No flag	No flag	Set by EPD/EMS
m-Cresol (3-Methylphenol)	µg/L	50	100	EPA Method 8270
o-Cresol (2-Methylphenol)	µg/L	50	100	EPA Method 8270
p-Cresol (4-Methylphenol)	µg/L	50	100	EPA Method 8270
Curium-242	pCi/L	6.65E + 01	1.33E + 02	Proposed PDWS (EPA, 1991)
Curium-243	pCi/L	4.15E + 00	8.3E + 00	Proposed PDWS (EPA, 1991)
Curium-243/244 ^c	pCi/L	4.15E + 00	8.3E + 00	Proposed PDWS (EPA, 1991)
Curium-244	pCi/L	4.92E + 00	9.84E + 00	Proposed PDWS (EPA, 1991)
Curium-245/246 ^c	pCi/L	3.12E + 00	6.23E + 00	Proposed PDWS (EPA, 1991)
Curium-246	pCi/L	3.14E + 00	6.27E + 00	Proposed PDWS (EPA, 1991)
Cyanide	µg/L	100	200	Final PDWS (EPA, 1992b)
p,p'-DDD	µg/L	0.5	1	EPA Method 8080
p,p'-DDE	µg/L	0.5	1	EPA Method 8080
p,p'-DDT	µg/L	0.5	1	EPA Method 8080
Di-n-butyl phthalate		No flag	No flag	Set by EPD/EMS
Di-n-octyl phthalate		No flag	No flag	Set by EPD/EMS
Diallate	µg/L	50	100	EPA Method 8270
Dibenz[a,h]anthracene	µg/L	0.15	0.3	Proposed PDWS (EPA, 1990)
Dibenzofuran	µg/L	50	100	EPA Method 8270
Dibromochloromethane	µg/L	50	100	Final PDWS (EPA, 1992a)
1,2-Dibromo-3-chloropropane	µg/L	0.1	0.2	Final PDWS (EPA, 1992a)
1,2-Dibromoethane (Ethylene dibromide)	µg/L	0.025	0.05	Final PDWS (EPA, 1992a)
Dibromomethane (Methylene bromide)	µg/L	5	10	EPA Method 8240
1,2-Dichlorobenzene	µg/L	300	600	Final PDWS (EPA, 1992a)
1,3-Dichlorobenzene	µg/L	50	100	EPA Method 8270
1,4-Dichlorobenzene	µg/L	37.5	75	Final PDWS (EPA, 1992a)
3,3'-Dichlorobenzidine	µg/L	50	100	EPA Method 8270
trans-1,4-Dichloro-2-butene	µg/L	150	300	EPA Method 8240
Dichlorodifluoromethane	µg/L	5	10	EPA Method 8240
1,1-Dichloroethane	µg/L	5	10	EPA Method 8240
1,2-Dichloroethane	µg/L	2.5	5	Final PDWS (EPA, 1992a)
1,1-Dichloroethene	µg/L	3.5	7	Final PDWS (EPA, 1992a)
1,2-Dichloroethene	µg/L	25	50	Final PDWS (EPA, 1992b)
cis-1,2-Dichloroethene	µg/L	35	70	Final PDWS (EPA, 1992a)
trans-1,2-Dichloroethene	µg/L	50	100	Final PDWS (EPA, 1992a)
Dichloromethane (Methylene chloride)	µg/L	2.5	5	Final PDWS (EPA, 1992b)
2,4-Dichlorophenol	µg/L	50	100	EPA Method 8270
2,6-Dichlorophenol	µg/L	50	100	EPA Method 8270
2,4-Dichlorophenoxyacetic acid	µg/L	35	70	Final PDWS (EPA, 1992a)
1,2-Dichloropropane	µg/L	2.5	5	Final PDWS (EPA, 1992a)
cis-1,3-Dichloropropene	µg/L	5	10	EPA Method 8240

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
trans-1,3-Dichloropropene	µg/L	5	10	EPA Method 8240
Diehrin	µg/L	2.5	5	EPA Method 8080
Diethyl phthalate		No flag	No flag	Set by EPD/EMS
Dimethoate	µg/L	50	100	EPA Method 8270
p-Dimethylaminoazobenzene	µg/L	50	100	EPA Method 8270
p-(Dimethylamino)ethylbenzene	µg/L	50	100	EPA Method 8270
7,12-Dimethylbenz[a]anthracene	µg/L	50	100	EPA Method 8270
3,3'-Dimethylbenzidine	µg/L	50	100	EPA Method 8270
a,a-Dimethylphenethylamine	µg/L	50	100	EPA Method 8270
2,4-Dimethyl phenol	µg/L	50	100	EPA Method 8270
Dimethyl phthalate		No flag	No flag	Set by EPD/EMS
1,3-Dinitrobenzene	µg/L	50	100	EPA Method 8270
2,4-Dinitrophenol	µg/L	250	500	EPA Method 8270
2,4-Dinitrotoluene	µg/L	50	100	EPA Method 8270
2,6-Dinitrotoluene	µg/L	50	100	EPA Method 8270
1,4-Dioxane	µg/L	50	100	EPA Method 8270
Diphenylamine	µg/L	50	100	EPA Method 8270
1,2-Diphenylhydrazine	µg/L	50	100	EPA Method 8270
Dissolved organic carbon	µg/L	5,000	10,000	EPA Method 9060
Disulfoton	µg/L	50	100	EPA Method 8270
Eh		No flag	No flag	Set by EPD/EMS
alpha-Endosulfan	µg/L	50	100	EPA Method 8270
beta-Endosulfan	µg/L	50	100	EPA Method 8270
Endosulfan I	µg/L	0.5	1	EPA Method 8080
Endosulfan II	µg/L	0.5	1	EPA Method 8080
Endosulfan sulfate	µg/L	0.5	1	EPA Method 8080
Endrin	µg/L	1	2	Final PDWS (EPA, 1992b)
Endrin aldehyde	µg/L	0.5	1	EPA Method 8080
Endrin ketone		No flag	No flag	Set by EPD/EMS
Ethylbenzene	µg/L	350	700	Final PDWS (EPA, 1992a)
Ethyl methacrylate	µg/L	50	100	EPA Method 8270
Ethyl methanesulfonate	µg/L	50	100	EPA Method 8270
Europium-152	pCi/L	3E + 01	6E + 01	Final PDWS (EPA, 1977)
Europium-154	pCi/L	1E + 02	2E + 02	Final PDWS (EPA, 1977)
Europium-155	pCi/L	3E + 02	6E + 02	Final PDWS (EPA, 1977)
Famphur	µg/L	50	100	EPA Method 8270
Fluoranthene	µg/L	50	100	EPA Method 8270
Fluorene	µg/L	50	100	EPA Method 8270
Fluoride	µg/L	2,000	4,000	Final PDWS (EPA, 1992a)
Gross alpha	pCi/L	7.5E + 00	1.5E + 01	Final PDWS (EPA, 1992a)
Heptachlor	µg/L	0.2	0.4	Final PDWS (EPA, 1992a)
Heptachlor epoxide	µg/L	0.1	0.2	Final PDWS (EPA, 1992a)
Heptachlorodibenzo-p-dioxin isomers	µg/L	0.00325	0.0065	EPA Method 8280
1,2,3,4,6,7,8-HPCDD	µg/L	0.00325	0.0065	EPA Method 8280
Heptachlorodibenzo-p-furan isomers	µg/L	0.00225	0.0045	EPA Method 8280
1,2,3,4,6,7,8-HPCDF	µg/L	0.00225	0.0045	EPA Method 8280
Hexachlorobenzene	µg/L	0.5	1	Final PDWS (EPA, 1992b)
Hexachlorobutadiene	µg/L	50	100	EPA Method 8270
Hexachlorocyclopentadiene	µg/L	25	50	Final PDWS (EPA, 1992b)
Hexachlorodibenzo-p-dioxin isomers	µg/L	0.00225	0.0045	EPA Method 8280
1,2,3,4,7,8-HXCDD	µg/L	0.00225	0.0045	EPA Method 8280
Hexachlorodibenzo-p-furan isomers	µg/L	0.002	0.004	EPA Method 8280
1,2,3,4,7,8-HXCDF	µg/L	0.002	0.004	EPA Method 8280

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
Hexachloroethane	µg/L	50	100	EPA Method 8270
Hexachlorophene	µg/L	250	500	EPA Method 8270
Hexachloropropene	µg/L	50	100	EPA Method 8270
2-Hexanone	µg/L	50	100	EPA Method 8240
Indeno[1,2,3-c,d]pyrene	µg/L	50	100	EPA Method 8270
Iodine	µg/L	250	500	APHA Method 415A
Iodine-129	pCi/L	5E-01	1E+00	Final PDWS (EPA, 1977)
Iodine-131	pCi/L	1.5E+00	3E+00	Final PDWS (EPA, 1977)
Iodomethane (Methyl iodide)	µg/L	75	150	EPA Method 8240
Iron	µg/L	150	300	SDWS (EPA, 1992c)
Iron-55	pCi/L	1E+03	2E+03	Final PDWS (EPA, 1977)
Iron-59	pCi/L	1E+02	2E+02	Final PDWS (EPA, 1977)
Isobutyl alcohol	µg/L	500	1,000	EPA Method 8240
Isodrin	µg/L	50	100	EPA Method 8270
Isophorone	µg/L	50	100	EPA Method 8270
Isosafrole	µg/L	50	100	EPA Method 8270
Kepone	µg/L	50	100	EPA Method 8270
Lanthanum-140	pCi/L	3E+01	6E+01	Final PDWS (EPA, 1977)
Lead	µg/L	7.5	15	Final PDWS (EPA, 1992a)
Lindane	µg/L	0.1	0.2	Final PDWS (EPA, 1992a)
Lithium	µg/L	25	50	EPA Method 6010
Magnesium		No flag	No flag	Set by EPD/EMS
Manganese	µg/L	25	50	SDWS (EPA, 1992c)
Manganese-54	pCi/L	1.5E+02	3E+02	Final PDWS (EPA, 1977)
Mercury	µg/L	1	2	Final PDWS (EPA, 1992a)
Methacrylonitrile	µg/L	250	500	EPA Method 8240
Methapyrilene	µg/L	50	100	EPA Method 8270
Methoxychlor	µg/L	20	40	Final PDWS (EPA, 1992a)
3-Methylcholanthrene	µg/L	50	100	EPA Method 8270
2-Methyl-4,6-dinitrophenol	µg/L	250	500	EPA Method 8270
Methyl ethyl ketone		No flag	No flag	Set by EPD/EMS
Methyl isobutyl ketone		No flag	No flag	Set by EPD/EMS
Methyl methacrylate	µg/L	50	100	EPA Method 8270
Methyl methanesulfonate	µg/L	50	100	EPA Method 8270
2-Methylnaphthalene	µg/L	50	100	EPA Method 8270
Molybdenum	µg/L	250	500	EPA Method 6010
Naphthalene	µg/L	50	100	EPA Method 8270
1,4-Naphthoquinone	µg/L	50	100	EPA Method 8270
1-Naphthylamine	µg/L	50	100	EPA Method 8270
2-Naphthylamine	µg/L	50	100	EPA Method 8270
Neptunium-237	pCi/L	3.53E+00	7.06E+00	Proposed PDWS (EPA, 1991)
Nickel	µg/L	50	100	Final PDWS (EPA, 1992b)
Nickel-59	pCi/L	1.5E+02	3E+02	Final PDWS (EPA, 1977)
Nickel-63	pCi/L	2.5E+01	5E+01	Final PDWS (EPA, 1977)
Niobium-95	pCi/L	1.5E+02	3E+02	Final PDWS (EPA, 1977)
Nitrate as nitrogen	µg/L	5,000	10,000	Final PDWS (EPA, 1992a)
Nitrate-nitrite as nitrogen	µg/L	5,000	10,000	Final PDWS (EPA, 1992a)
Nitrite as nitrogen	µg/L	500	1,000	Final PDWS (EPA, 1992a)
2-Nitroaniline	µg/L	50	100	EPA Method 8270
3-Nitroaniline	µg/L	50	100	EPA Method 8270
4-Nitroaniline	µg/L	50	100	EPA Method 8270
Nitrobenzene	µg/L	50	100	EPA Method 8270
Nitrogen by Kjeldahl method	µg/L	500	1,000	EPA Method 351.2
2-Nitrophenol	µg/L	50	100	EPA Method 8270
4-Nitrophenol	µg/L	50	100	EPA Method 8270

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
4-Nitroquinoline-1-oxide	µg/L	50	100	EPA Method 8270
N-Nitrosodi-n-butylamine	µg/L	50	100	EPA Method 8270
N-Nitrosodiethylamine	µg/L	50	100	EPA Method 8270
N-Nitrosodimethylamine	µg/L	50	100	EPA Method 8270
N-Nitrosodiphenylamine	µg/L	50	100	EPA Method 8270
N-Nitrosodipropylamine	µg/L	50	100	EPA Method 8270
N-Nitrosomethylethylamine	µg/L	50	100	EPA Method 8270
N-Nitrosomorpholine	µg/L	50	100	EPA Method 8270
N-Nitrosopiperidine	µg/L	50	100	EPA Method 8270
N-Nitrosopyrrolidine	µg/L	50	100	EPA Method 8270
5-Nitro-o-toluidine	µg/L	50	100	EPA Method 8270
Nonvolatile beta	pCi/L	2.5E+01	5E+01	Proposed PDWS (EPA, 1986)
Octachlorodibenzo-p-dioxin isomers	µg/L	0.005	0.01	EPA Method 8280
Octachlorodibenzo-p-furan isomers	µg/L	0.005	0.01	EPA Method 8280
Odor		No flag	No flag	Set by EPD/EMS
Oil & Grease	µg/L	5,000	10,000	EPA Method 413.1
Parathion	µg/L	0.25	0.5	EPA Method 8080
Parathion methyl	µg/L	0.25	0.5	EPA Method 8080
PCB 1016	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1221	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1232	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1242	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1248	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1254	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1260	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
PCB 1262	µg/L	0.25	0.5	Final PDWS (EPA, 1992a)
Pentachlorobenzene	µg/L	50	100	EPA Method 8270
Pentachlorodibenzo-p-dioxin isomers	µg/L	0.00275	0.0055	EPA Method 8280
1,2,3,7,8-PCDD	µg/L	0.00275	0.0055	EPA Method 8280
Pentachlorodibenzo-p-furan isomers	µg/L	0.00275	0.0055	EPA Method 8280
1,2,3,7,8-PCDF	µg/L	0.00275	0.0055	EPA Method 8270
Pentachloroethane	µg/L	50	100	EPA Method 8270
Pentachloronitrobenzene	µg/L	50	100	EPA Method 8270
Pentachlorophenol	µg/L	0.5	1	Final PDWS (EPA, 1992a)
pH	pH	8	10	Set by EPD/EMS
pH	pH	4	3	Set by EPD/EMS
Phenacetin	µg/L	50	100	EPA Method 8270
Phenanthrene	µg/L	50	100	EPA Method 8270
Phenol	µg/L	50	100	EPA Method 8270
Phenols	µg/L	25	50	EPA Method 420.1
p-Phenylenediamine	µg/L	50	100	EPA Method 8270
Phorate	µg/L	0.5	1	EPA Method 8080
2-Picoline	µg/L	50	100	EPA Method 8270
Plutonium-238	pCi/L	3.51E+00	7.02E+00	Proposed PDWS (EPA, 1991)
Plutonium-239	pCi/L	3.11E+01	6.21E+01	Proposed PDWS (EPA, 1991)
Plutonium-239/240 ^c	pCi/L	3.11E+01	6.21E+01	Proposed PDWS (EPA, 1991)
Plutonium-240	pCi/L	3.11E+01	6.22E+01	Proposed PDWS (EPA, 1991)
Plutonium-241	pCi/L	3.13E+01	6.26E+01	Proposed PDWS (EPA, 1991)
Plutonium-242	pCi/L	3.27E+01	6.54E+01	Proposed PDWS (EPA, 1991)
Potassium		No flag	No flag	Set by EPD/EMS
Potassium-40	pCi/L	1.5E+02	3E+02	Proposed PDWS (EPA, 1986)
Pronamid	µg/L	50	100	EPA Method 8270
Propionitrile	µg/L	1,000	2,000	EPA Method 8240
Pyrene	µg/L	50	100	EPA Method 8270
Pyridine	µg/L	50	100	EPA Method 8270

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
Radium (alpha-emitting) ^d	pCi/L	1E +01	2E +01	Proposed PDWS (EPA, 1991)
Radium-226	pCi/L	1E +01	2E +01	Proposed PDWS (EPA, 1991)
Radium-228	pCi/L	1E +01	2E +01	Proposed PDWS (EPA, 1991)
Radon-222	pCi/L	1.5E +02	3E +02	Proposed PDWS (EPA, 1991)
Ruthenium-103	pCi/L	1E +02	2E +02	Final PDWS (EPA, 1977)
Ruthenium-106	pCi/L	1.5E +01	3E +01	Final PDWS (EPA, 1977)
Safrole	µg/L	50	100	EPA Method 8270
Selenium	µg/L	25	50	Final PDWS (EPA, 1992a)
Silica		No flag	No flag	Set by EPD/EMS
Total silica	µg/L	500	1,000	EPA Method 6010
Silver	µg/L	50	100	SDWS (EPA, 1992c)
Sodium		No flag	No flag	Set by EPD/EMS
Sodium-22	pCi/L	2.33E +02	4.66E +02	Proposed PDWS (EPA, 1991)
Specific conductance	µS/cm	250	500	Set by EPD/EMS
Strontium-89	pCi/L	1E +01	2E +01	Final PDWS (EPA, 1977)
Strontium-89/90 ^c	pCi/L	4E +00	8E +00	Final PDWS (EPA, 1992a)
Strontium-90	pCi/L	4E +00	8E +00	Final PDWS (EPA, 1992a)
Styrene	µg/L	50	100	Final PDWS (EPA, 1992a)
Sulfate	µg/L	200,000	400,000	Proposed PDWS (EPA, 1990)
Sulfide	µg/L	5,000	10,000	EPA Method 9030
Sulfotetpp	µg/L	50	100	EPA Method 8270
Surfactants		No flag	No flag	Set by EPD/EMS
2,3,7,8-TCDD	µg/L	0.000015	0.00003	Final PDWS (EPA, 1992b)
2,3,7,8-TCDF	µg/L	0.002	0.004	EPA Method 8280
Technetium-99	pCi/L	4.5E +02	9E +02	Final PDWS (EPA, 1977)
1,2,4,5-Tetrachlorobenzene	µg/L	50	100	EPA Method 8270
Tetrachlorodibenzo-p-dioxin isomers	µg/L	0.00225	0.0045	EPA Method 8280
Tetrachlorodibenzo-p-furan isomers	µg/L	0.002	0.004	EPA Method 8280
1,1,1,2-Tetrachloroethane	µg/L	5	10	EPA Method 8240
1,1,2,2-Tetrachloroethane	µg/L	5	10	EPA Method 8240
Tetrachloroethylene	µg/L	2.5	5	Final PDWS (EPA, 1992a)
2,3,4,6-Tetrachlorophenol	µg/L	50	100	EPA Method 8270
Tetraethyl dithiopyrophosphate	µg/L	50	100	EPA Method 8270
Thallium	µg/L	1	2	Final PDWS (EPA, 1992b)
Thionazin	µg/L	50	100	EPA Method 8270
Thorium-228	pCi/L	6.25E +01	1.25E +02	Proposed PDWS (EPA, 1991)
Thorium-230	pCi/L	3.96E +01	7.92E +01	Proposed PDWS (EPA, 1991)
Thorium-232	pCi/L	4.4E +01	8.8E +01	Proposed PDWS (EPA, 1991)
Thorium-234	pCi/L	2E +02	4.01E +02	Proposed PDWS (EPA, 1991)
Tin	µg/L	10	20	EPA Method 282.2
Tin-113	pCi/L	1.5E +02	3E +02	Final PDWS (EPA, 1977)
Toluene	µg/L	500	1,000	Final PDWS (EPA, 1992a)
o-Toluidine	µg/L	50	100	EPA Method 8270
Total carbon	µg/L	5,000	10,000	EPA Method 9060
Total dissolved solids		No flag	No flag	Set by EPD/EMS
Total hydrocarbons	µg/L	5,000	10,000	EPA Method 418.1
Total inorganic carbon	µg/L	5,000	10,000	EPA Method 9060
Total organic carbon	µg/L	5,000	10,000	EPA Method 9060
Total organic halogens	µg/L	25	50	EPA Method 9020
Total organic nitrogen	µg/L	500	1,000	APHA Method 420
Total petroleum hydrocarbons	µg/L	5,000	10,000	EPA Method 418.1
Total phosphates (as P)		No flag	No flag	Set by EPD/EMS
Total phosphorus		No flag	No flag	Set by EPD/EMS

<u>Analyte</u>	<u>Unit</u>	<u>Flag 1</u>	<u>Flag 2</u>	<u>Source^a</u>
Toxaphene	$\mu\text{g/L}$	1.5	3	Final PDWS (EPA, 1992a)
2,4,5-TP (Silvex)	$\mu\text{g/L}$	25	50	Final PDWS (EPA, 1992a)
Tributyl phosphate	$\mu\text{g/L}$	50	100	EPA Method 8270
1,2,4-Trichlorobenzene	$\mu\text{g/L}$	35	70	Final PDWS (EPA, 1992b)
1,1,1-Trichloroethane	$\mu\text{g/L}$	100	200	Final PDWS (EPA, 1992a)
1,1,2-Trichloroethane	$\mu\text{g/L}$	2.5	5	Final PDWS (EPA, 1992b)
Trichloroethylene	$\mu\text{g/L}$	2.5	5	Final PDWS (EPA, 1992a)
Trichlorofluoromethane	$\mu\text{g/L}$	5	10	EPA Method 8240
2,4,5-Trichlorophenol	$\mu\text{g/L}$	50	100	EPA Method 8270
2,4,6-Trichlorophenol	$\mu\text{g/L}$	50	100	EPA Method 8270
2,4,5-Trichlorophenoxyacetic acid	$\mu\text{g/L}$	2.5	5	EPA Method 8150
1,2,3-Trichloropropane	$\mu\text{g/L}$	5	10	EPA Method 8240
O,O,O-Triethyl phosphorothioate	$\mu\text{g/L}$	50	100	EPA Method 8270
1,3,5-Trinitrobenzene	$\mu\text{g/L}$	50	100	EPA Method 8270
Tritium	pCi/mL	$1\text{E}+01$	$2\text{E}+01$	Final PDWS (EPA, 1992a)
Turbidity		No flag	No flag	Set by EPD/EMS
Uranium	$\mu\text{g/L}$	10	20	Proposed PDWS (EPA, 1991)
Uranium alpha activity	pCi/L	$1.5\text{E}+01$	$3\text{E}+01$	Proposed PDWS (EPA, 1991)
Uranium-233/234 ^c	pCi/L	$6.9\text{E}+00$	$1.38\text{E}+01$	Proposed PDWS (EPA, 1991)
Uranium-234	pCi/L	$6.95\text{E}+00$	$1.39\text{E}+01$	Proposed PDWS (EPA, 1991)
Uranium-235	pCi/L	$7.25\text{E}+00$	$1.45\text{E}+01$	Proposed PDWS (EPA, 1991)
Uranium-238	pCi/L	$7.3\text{E}+00$	$1.46\text{E}+01$	Proposed PDWS (EPA, 1991)
Vanadium	$\mu\text{g/L}$	40	80	EPA Method 6010
Vinyl acetate	$\mu\text{g/L}$	5	10	EPA Method 8240
Xylenes	$\mu\text{g/L}$	5,000	10,000	Final PDWS (EPA, 1992a)
Zinc	$\mu\text{g/L}$	2,500	5,000	SDWS (EPA, 1992c)
Zinc-65	pCi/L	$1.5\text{E}+02$	$3\text{E}+02$	Final PDWS (EPA, 1977)
Zirconium-95	pCi/L	$1\text{E}+02$	$2\text{E}+02$	Final PDWS (EPA, 1977)
Zirconium/Niobium-95 ^c	pCi/L	$1\text{E}+02$	$2\text{E}+02$	Final PDWS (EPA, 1977)

^a References for methods are found in Appendix E; references for dated sources are at the end of this appendix.
^b EPD/EMS set this flagging criterion using the 1991 proposed PDWS because the final PDWS in 1977 may have been in error.
^c When radionuclide analyses are combined, the lower PDWS of the two isotopes is used for flagging.
^d The applied standard is for radium-226.

References

EPA (U.S. Environmental Protection Agency), 1977. *National Interim Primary Drinking Water Regulations, EPA-570/9-76-003*. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1986. *Water Pollution Control; National Primary Drinking Water Regulations, Radionuclides (Proposed)*. *Federal Register*, September 30, 1986, pp. 34836-34862. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1990. *National Primary and Secondary Drinking Water Regulations; Synthetic Organic Chemicals and Inorganic Chemicals (Proposed Rule)*. *Federal Register*, July 25, 1990, pp. 30369-30448. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1991. *National Primary Drinking Water Regulations; Radionuclides; Proposed Rule*. *Federal Register*, July 18, 1991, pp. 33052-33127. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1992a. *National Primary Drinking Water Regulations, Code of Federal Regulations*, Section 40, Part 141, pp. 589-729. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1992b. *National Primary Drinking Water Regulations—Synthetic Organic Chemical and Inorganic Chemicals; National Primary Drinking Water Regulations Implementation*. *Federal Register*, July 17, 1992, pp. 31776-31849. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1992c. *National Secondary Drinking Water Regulations, Code of Federal Regulations*, Section 40, Part 143, pp. 772-776. Washington, DC.

Appendix C – Figures

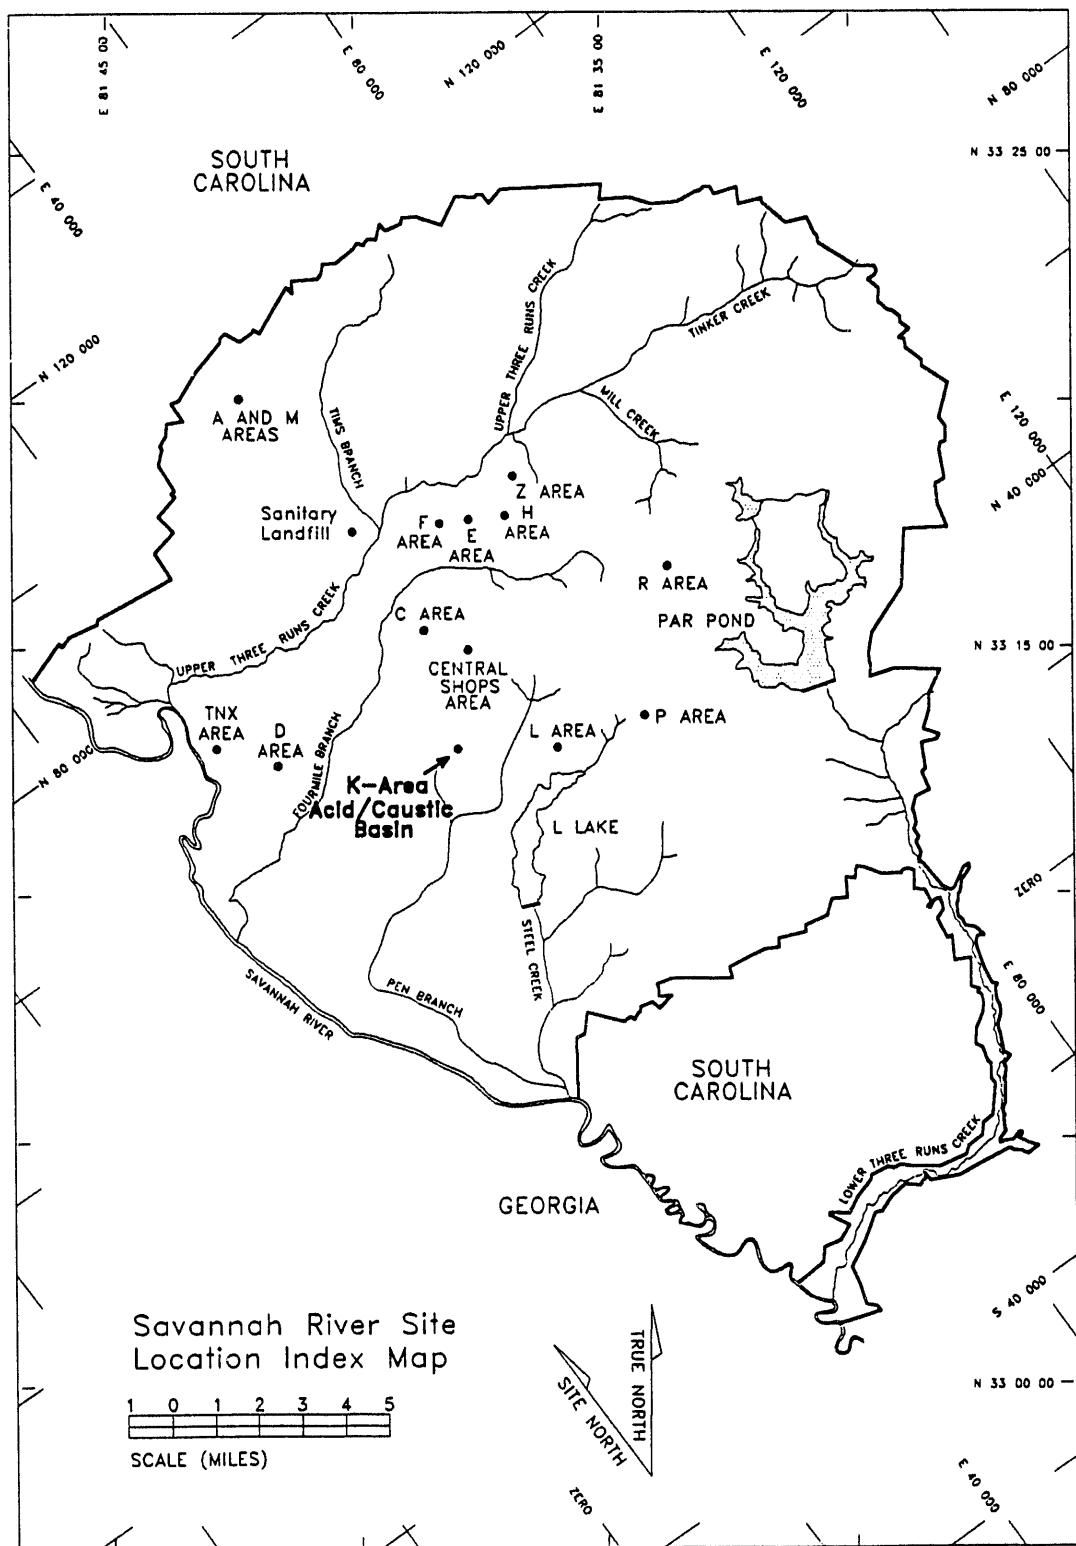


Figure 1. Location of the K-Area Acid/Caustic Basin at the Savannah River Site

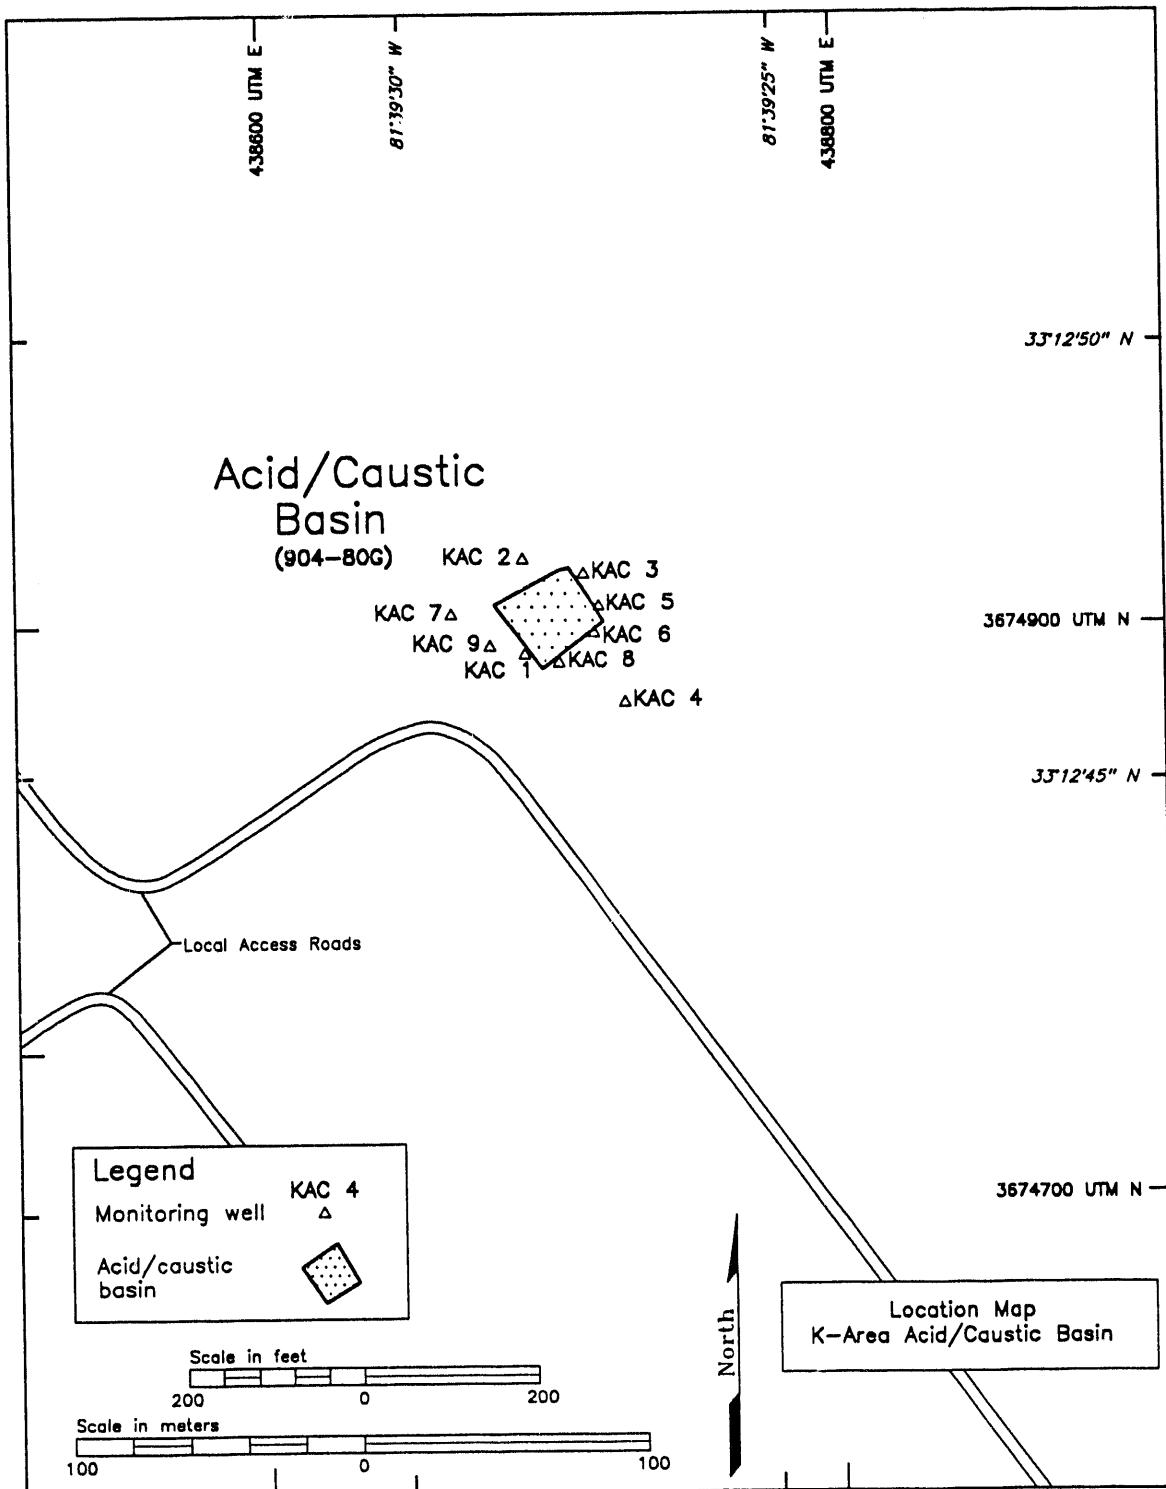


Figure 2. Location of Groundwater Monitoring Wells at the K-Area Acid/Caustic Basin

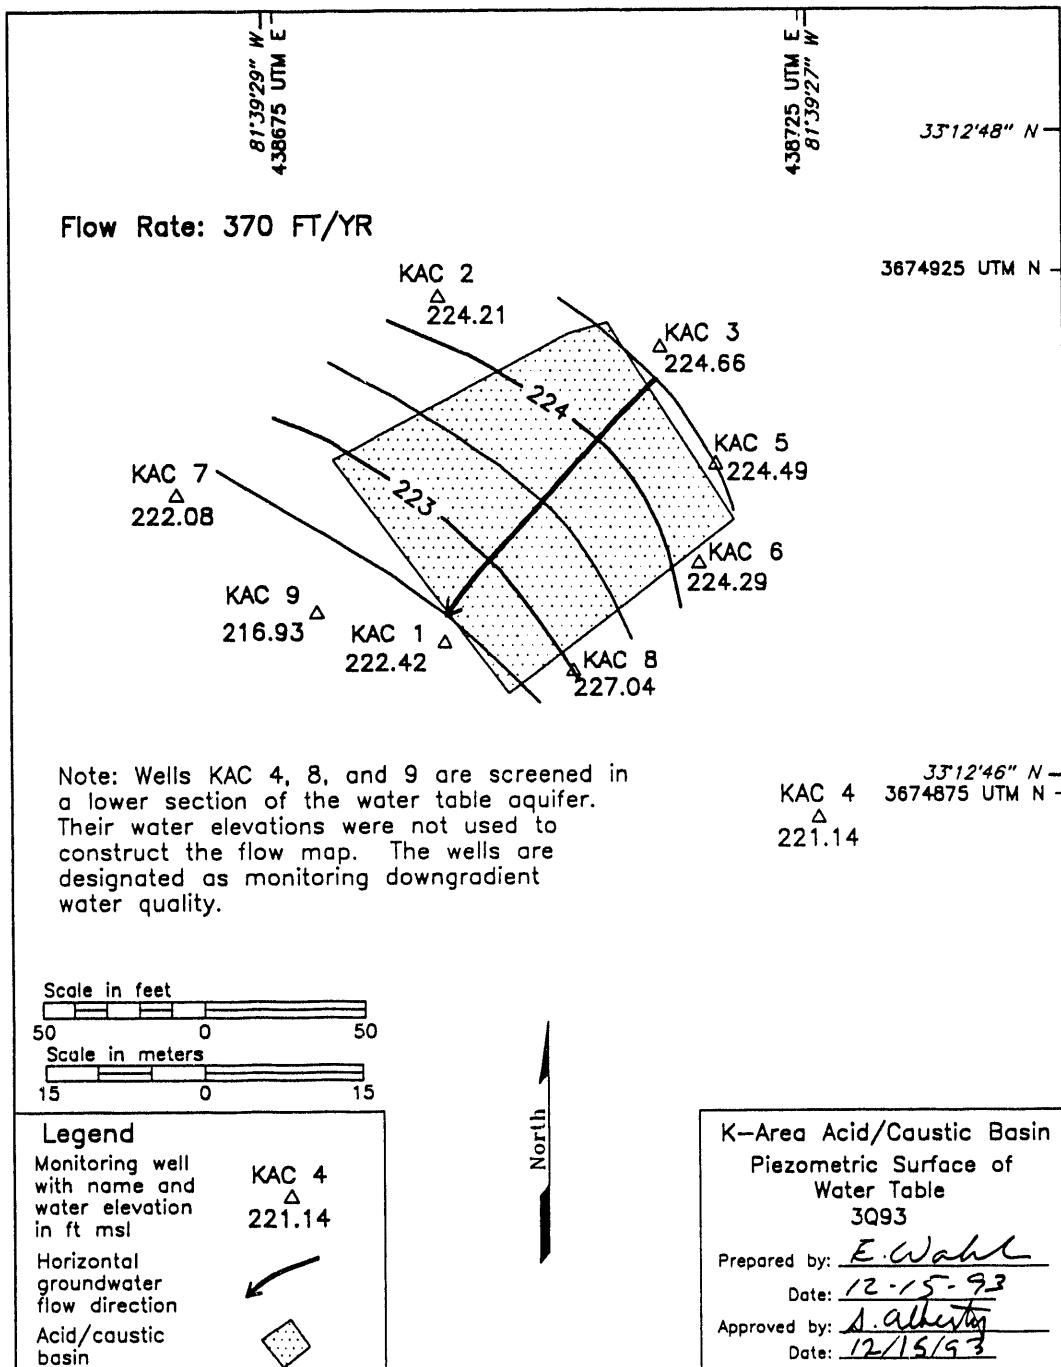


Figure 3. Water-Elevation Data at the Water Table at the K-Area Acid/Caustic Basin

Appendix D – Groundwater Monitoring Results Tables

Key to Reading the Tables

The following abbreviations may appear in the tabular data:

B = sample collected from well using an open bucket bailer
BA = Barringer Laboratories, Inc.
CN = Clemson Technical Center, Inc.
CS = carbon steel
D = primary drinking water standard (PDWS)
E = exponential notation (e.g., 1.1E-09 = $1.1 \times 10^{-9} = 0.0000000011$)
EM = Environmental Protection Department/Environmental Monitoring Section (EPD/EMS)
Laboratory
GE = General Engineering Laboratories
GP = Environmental Physics, Inc.
H = holding time
1,2,3,4,6,7,8-HPCDD = 1,2,3,4,6,7,8-heptachlorodibenzo-p-dioxin
1,2,3,4,6,7,8-HPCDF = 1,2,3,4,6,7,8-heptachlorodibenzo-p-furan
1,2,3,4,7,8-HXCDD = 1,2,3,4,7,8-hexachlorodibenzo-p-dioxin
1,2,3,4,7,8-HXCDF = 1,2,3,4,7,8-hexachlorodibenzo-p-furan
Lindane = gamma-benzene hexachloride
mg/L = milligrams per liter
Mod = modifier
msl = mean sea level
MSL = million structures per liter
NTU = turbidity unit
P = sample collected from well using a bladder pump
PCB = polychlorinated biphenyl
1,2,3,7,8-PCDD = 1,2,3,7,8-pentachlorodibenzo-p-dioxin
1,2,3,7,8-PCDF = 1,2,3,7,8-pentachlorodibenzo-p-furan
pCi/L = picocuries per liter
pCi/mL = picocuries per milliliter
PDWS = primary drinking water standard
pH = pH unit
PVC = polyvinyl chloride
S = sample collected from well using a single-speed centrifugal downhole pump
Sp. conductance = specific conductance
SP = Spencer Testing Services, Inc.
TCDD = tetrachlorodibenzo-p-dioxin
TCDF = tetrachlorodibenzo-p-furan
TM = TMA/Eberline
TOC = top of casing
V = sample collected from well using a variable-speed pump
WA = Roy F. Weston, Inc.
 $\mu\text{g}/\text{L}$ = micrograms per liter
 $\mu\text{S}/\text{cm}$ = microsiemens per centimeter

Holding Times

Standard analytical methods include a limit, called holding time, on the maximum elapsed time between sample collection and extraction or analysis by the laboratory. In the data tables, a large dot (●) in the H (holding time) column indicates that holding time was exceeded. Analyses performed beyond holding time may not yield valid results.

The South Carolina Department of Health and Environmental Control allows only 15 minutes to elapse between sampling and analysis for pH. Thus, only field pH measurements can meet the holding time criterion; laboratory pH analyses always will exceed it.

The laboratory procedure used for the determination of specific conductance allows one day to elapse between sampling and analysis. Thus, laboratory specific conductance measurements may exceed the holding time criterion.

Data Rounding

Constituent results in analytical results tables that appear to equal the final PDWS but are not marked in the D (exceeded the final PDWS or screening level) column are below the final PDWS in the database. Values stored in the database contain more significant digits than the reported results. Apparent discrepancies in the tables are due to the rounding of reported results.

Data Qualification

The contract laboratories continually assess their own accuracy and precision according to U.S. Environmental Protection Agency (EPA) guidelines. They submit sample- or batch-specific quality assurance/quality control information either at the same time as analytical results or in a quarterly summary. Properly defined and used result modifiers (also referred to as qualifiers) can be a key component in assessing data useability. Result modifiers designed by Environmental Protection Department/Environmental Monitoring Section and provided to the primary laboratories are defined below. These modifiers appear in the data tables under the column "Mod." The lettered modifiers are based on EPA's STORET codes.

<u>Result modifier</u>	<u>Definition</u>
(Blank)	Data are not qualified. Number should be interpreted exactly as reported.
A	Value reported is the mean of two or more determinations.
J	Value is estimated because quantitation in the sample or in associated quality control samples did not meet specifications.
L	Value is off-scale high. The actual value is not known but is known to be greater than the value shown.
M	Presence of the analyte is verified but not quantified.

<u>Result modifier</u>	<u>Definition</u>
R	Result was rejected because performance requirements in the sample analysis or associated quality control analyses were not met.
T	Analyte was not detected; if present, it was below the criteria for detection.
V	Analyte was detected in an associated method blank.
Y	Result was obtained from an unpreserved or improperly preserved sample. Data may not be accurate.
1	Result may be an underestimation of the true value due to analytical bias.
2	Result may be an overestimation of the true value due to analytical bias.
3	The associated result may be of poor precision (high variability) due to analytical bias.
4	Result is associated with QA results indicating matrix interference.
6	The associated result is from a reanalysis performed out of holding time due to problems with an earlier analysis.

Table 1. Maximum Results for Constituents Exceeding Final Primary Drinking Water Standards

<u>Well</u>	<u>Constituent</u>	<u>Unit</u>	<u>4Q92</u>	<u>1Q93</u>	<u>2Q93</u>	<u>3Q93</u>	<u>Mod</u>
KAC 8	Dichloromethane	µg/L	^a	^b	-	5.1	Y

^a The drinking water standard for dichloromethane (methylene chloride), a common laboratory contaminant, published in the Federal Register July 17, 1992, and effective January 17, 1994, was adopted by EPD/EMS effective first quarter 1993. The new standard was not applied to historical results, although those results may be higher than the new standard.

^b - = Not above standards

Table 2. Maximum Results for Constituents Exceeding Half the Final Primary Drinking Water Standards, Other Flag 1 or Flag 2 Criteria, or the SRS Turbidity Standard

<u>Well</u>	<u>Constituent</u>	<u>Unit</u>	<u>2Q93</u>	<u>Mod</u>	<u>Flag</u>
KAC 1	Aluminum Specific conductance	µg/L µS/cm	27 313	J3Y JY	1 1
KAC 2	Specific conductance	µS/cm	405	JY	1
KAC 3	Total organic halogens	µg/L	46		1 ^a
KAC 4	Aluminum Iron	µg/L µg/L	201 544	Y Y	2 2
KAC 5	Total organic halogens	µg/L	26	Y	1
KAC 6	Aluminum Iron	µg/L µg/L	1,220 793	Y Y	2 2
KAC 7	Aluminum Iron Lead Radium-228	µg/L µg/L µg/L pCi/L	567 515 8.9 1.7E + 01	Y Y J3Y	2 2 1 1
KAC 8	Iron	µg/L	186	VY	1
KAC 9	Aluminum Specific conductance Sulfate	µg/L µS/cm µg/L	401 670 264,000	Y JY Y	2 2 1

Notes: Constituents exceeding half the final PDWS appear *italicized*.

These results do not include field data results.

^a One of 3 replicate results from General Engineering Laboratories (GE). The other 2 GE results and both Weston results are below standards.

Table 3. Groundwater Monitoring Results for Individual Wells

WELL KAC 1

<u>SRS Coord.</u>	<u>Lat/Longitude</u>	<u>Screen Zone Elevation</u>	<u>Top of Casing</u>	<u>Casing</u>	<u>Pump</u>	<u>Formation</u>
N53167.0	33.212893 °N	229.0-199.0 ft msl	266 ft msl	4" PVC	V	Water table
E42614.8	81.657866 °W					

FIELD MEASUREMENTS

Sample date: 07/17/93
Depth to water: 43.58 ft (13.28 m) below TOC
Water elevation: 222.42 ft (67.79 m) msl
Sp. conductance: 358 μ S/cm
Turbidity: 0.9 NTU
Water evacuated before sampling: 70 gal

Time: 13:27
pH: 6.8
Alkalinity: 48 mg/L
Water temperature: 21.9 °C
Volumes purged: 4.6 well volumes

LABORATORY ANALYSES

<u>H</u>	<u>D</u>	<u>Analyte</u>	<u>Result</u>	<u>Mod</u>	<u>Unit</u>	<u>Flag</u>	<u>Lab</u>
●		pH	6.3	JY	pH	0	WA
●		Specific conductance	313	JY	μ S/cm	1	WA
●		Turbidity	<0.20	J	NTU	0	WA
		Aluminum	<20	Y	μ g/L	0	WA
		Aluminum	27	J3Y	μ g/L	1	WA
		Arsenic	<2.0	Y	μ g/L	0	WA
		Arsenic	<2.0	Y	μ g/L	0	WA
		Barium	<4.0	Y	μ g/L	0	WA
		Barium	<4.0	Y	μ g/L	0	WA
		Cadmium	<2.0	Y	μ g/L	0	WA
		Cadmium	<2.0	Y	μ g/L	0	WA
		Calcium	89	Y	μ g/L	0	WA
		Calcium	93	Y	μ g/L	0	WA
		Chloride	5,730	Y	μ g/L	0	WA
		Chromium	<4.0	Y	μ g/L	0	WA
		Chromium	4.3	J3Y	μ g/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	μ g/L	0	WA
		Endrin	<0.11	Y	μ g/L	0	WA
		Endrin	<0.22	Y	μ g/L	0	WA
		Fluoride	<100	Y	μ g/L	0	WA
		Iron	37	Y	μ g/L	0	WA
		Iron	41	Y	μ g/L	0	WA
		Lead	<3.0	Y	μ g/L	0	WA
		Lead	<3.0	Y	μ g/L	0	WA
		Lindane	<0.054	Y	μ g/L	0	WA
		Lindane	<0.11	Y	μ g/L	0	WA
		Magnesium	138	VY	μ g/L	0	WA
		Magnesium	157	VY	μ g/L	0	WA
		Manganese	<2.0	Y	μ g/L	0	WA
		Manganese	<2.0	Y	μ g/L	0	WA
		Mercury	<0.20	Y	μ g/L	0	WA
		Mercury	<0.20	Y	μ g/L	0	WA
		Methoxychlor	<1.1	Y	μ g/L	0	WA
		Methoxychlor	<1.1	Y	μ g/L	0	WA
		Methoxychlor	<0.54	Y	μ g/L	0	WA
		Nitrate as nitrogen	372	Y	μ g/L	0	WA
		Phenols	<5.0	Y	μ g/L	0	WA
		Phenols	<5.0	Y	μ g/L	0	WA
		Potassium	<500	Y	μ g/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 1 collected on 07/17/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Potassium	< 500	Y	µg/L	0	WA
		Selenium	< 2.0	Y	µg/L	0	WA
		Selenium	2.3	J3Y	µg/L	0	WA
		Silica	4,050	Y	µg/L	0	WA
		Silica	4,070	Y	µg/L	0	WA
		Silver	< 2.0	Y	µg/L	0	WA
		Silver	< 2.0	Y	µg/L	0	WA
		Sodium	68,900	VY	µg/L	0	WA
		Sodium	68,600	VY	µg/L	0	WA
		Sulfate	91,300	Y	µg/L	0	WA
		Total dissolved solids	214,000	Y	µg/L	0	WA
		Total organic carbon	< 1,000	Y	µg/L	0	WA
		Total organic halogens	8.1	Y	µg/L	0	WA
		Total phosphates (as P)	< 50	Y	µg/L	0	WA
		Total phosphates (as P)	< 50	Y	µg/L	0	WA
		Toxaphene	< 1.1	Y	µg/L	0	WA
		Toxaphene	< 2.2	Y	µg/L	0	WA
		Toxaphene	< 2.2	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	< 0.54	Y	µg/L	0	WA
		Gross alpha	< 8.0E-01		pCi/L	0	TM
		Nonvolatile beta	1.2E+00 ± 2.1E + 00		pCi/L	0	TM
		Radium-226	< 3.0E-01		pCi/L	0	TM
		Radium-228	5.0E-01 ± 1.2E + 00		pCi/L	0	TM
		Tritium	1.5E+00 ± 3.6E-01		pCi/mL	0	TM

WELL KAC 2

SRS Coord.	Lat/Longitude	Screen Zone Elevation	Top of Casing	Casing	Pump	Formation
N53255.5	33.213191 °N	225.4-195.4 ft msl	257.5 ft msl	4" PVC	S	Water table
E42677.2	81.657873 °W					

FIELD MEASUREMENTS

Sample date: 07/17/93
Depth to water: 33.29 ft (10.15 m) below TOC
Water elevation: 224.21 ft (68.34 m) msl
Sp. conductance: 460 µS/cm
Turbidity: 1.3 NTU
Water evacuated before sampling: 204 gal

Time: 15:06
pH: 6.3
Alkalinity: 46 mg/L
Water temperature: 19.7 °C

Volumes purged: 10.8 well volumes

LABORATORY ANALYSES

H	D	Analyte	Result	Mod	Unit	Flag	Lab
●		pH	6.1	JY	pH	0	WA
●		Specific conductance	405	JY	µS/cm	1	WA
●		Turbidity	0.36	JY	NTU	0	WA
		Aluminum	< 20	Y	µg/L	0	WA
		Arsenic	< 2.0	Y	µg/L	0	WA
		Barium	< 4.0	Y	µg/L	0	WA
		Cadmium	< 2.0	Y	µg/L	0	WA
		Calcium	101	Y	µg/L	0	WA
		Chloride	5,280	Y	µg/L	0	WA
		Chromium	9.0	Y	µg/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 2 collected on 07/17/93, laboratory analyses (cont.)

H	D	<u>Analyte</u>	<u>Result</u>	<u>Mod</u>	<u>Unit</u>	<u>Flag</u>	<u>Lab</u>
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<2.1	Y	µg/L	0	WA
		Endrin	<0.11	Y	µg/L	0	WA
		Fluoride	<100	Y	µg/L	0	WA
		Iron	63	Y	µg/L	0	WA
		Lead	<3.0	Y	µg/L	0	WA
		Lindane	<0.054	Y	µg/L	0	WA
		Magnesium	120	YY	µg/L	0	WA
		Manganese	<2.0	Y	µg/L	0	WA
		Mercury	<0.20	Y	µg/L	0	WA
		Methoxychlor	<0.54	Y	µg/L	0	WA
		Nitrate as nitrogen	401	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Potassium	513	J3Y	µg/L	0	WA
		Selenium	2.2	J3Y	µg/L	0	WA
		Silica	4,850	Y	µg/L	0	WA
		Silver	<2.0	Y	µg/L	0	WA
		Sodium	86,200	YY	µg/L	0	WA
		Sulfate	137,000	Y	µg/L	0	WA
		Total dissolved solids	277,000	Y	µg/L	0	WA
		Total organic carbon	<1,000	Y	µg/L	0	WA
		Total organic carbon	<1,000	Y	µg/L	0	WA
		Total organic halogens	<5.0	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Toxaphene	<1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.55	Y	µg/L	0	WA
		Gross alpha	<8.0E-01		pCi/L	0	TM
		Nonvolatile beta	<1.0E+00		pCi/L	0	TM
		Radium-226	<2.9E-01		pCi/L	0	TM
		Radium-228	1.9E+00 ± 1.2E+00		pCi/L	0	TM
		Tritium	5.1E+00 ± 5.4E-01		pCi/mL	0	TM

WELL KAC 3

<u>SRS Coord.</u>	<u>Lat/Longitude</u>	<u>Screen Zone Elevation</u>	<u>Top of Casing</u>	<u>Casing</u>	<u>Pump</u>	<u>Formation</u>
N53201.8	33.213148 °N	225.8-195.8 ft msl	257.8 ft msl	4" PVC	S	Water table
E42723.9	81.657646 °W					

FIELD MEASUREMENTS

Sample date: 07/17/93
Depth to water: 33.14 ft (10.10 m) below TOC
Water elevation: 224.66 ft (68.48 m) msl
Sp. conductance: 143 µS/cm
Turbidity: 1.3 NTU
Water evacuated before sampling: 249 gal

Time: 11:19
pH: 5.7
Alkalinity: 16 mg/L
Water temperature: 18.7 °C

Volumes purged: 13.2 well volumes

LABORATORY ANALYSES

H	D	<u>Analyte</u>	<u>Result</u>	<u>Mod</u>	<u>Unit</u>	<u>Flag</u>	<u>Lab</u>
●	pH		5.9	JY	pH	0	WA
●	pH		6.0	JY	pH	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 3 collected on 07/17/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
●		pH	6.0	J	pH	0	GE
●		pH	6.1	J	pH	0	GE
●		Specific conductance	134	JY	µS/cm	0	WA
●		Specific conductance	134	JY	µS/cm	0	WA
●		Specific conductance	150		µS/cm	0	GE
●		Specific conductance	145		µS/cm	0	GE
●		Turbidity	<0.20	J	NTU	0	WA
●		Turbidity	<0.20	J	NTU	0	WA
		Turbidity	0.14		NTU	0	GE
		Turbidity	0.15		NTU	0	GE
		Aluminum	<20	Y	µg/L	0	WA
		Aluminum	<20	Y	µg/L	0	WA
		Aluminum	<20		µg/L	0	GE
		Aluminum	<20		µg/L	0	GE
		Arsenic	<2.0	Y	µg/L	0	WA
		Arsenic	<2.0	Y	µg/L	0	WA
		Arsenic	<2.0		µg/L	0	GE
		Arsenic	<2.0		µg/L	0	GE
		Barium	<4.0	Y	µg/L	0	WA
		Barium	<4.0	Y	µg/L	0	WA
		Barium	<3.0		µg/L	0	GE
		Barium	3.1		µg/L	0	GE
		Cadmium	<2.0	Y	µg/L	0	WA
		Cadmium	<2.0	Y	µg/L	0	WA
		Cadmium	<2.0		µg/L	0	GE
		Cadmium	<2.0		µg/L	0	GE
		Calcium	504	Y	µg/L	0	WA
		Calcium	547	Y	µg/L	0	WA
		Calcium	585		µg/L	0	GE
		Calcium	543		µg/L	0	GE
		Chloride	5,830	Y	µg/L	0	WA
		Chloride	5,860	Y	µg/L	0	WA
		Chloride	7,280		µg/L	0	GE
		Chloride	7,390		µg/L	0	GE
		Chromium	<4.0	Y	µg/L	0	WA
		Chromium	13	Y	µg/L	0	WA
		Chromium	<4.0		µg/L	0	GE
		Chromium	<4.0		µg/L	0	GE
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<0.30		µg/L	0	GE
		2,4-Dichlorophenoxyacetic acid	<0.30		µg/L	0	GE
		Endrin	<0.11	Y	µg/L	0	WA
		Endrin	<0.11	Y	µg/L	0	WA
		Endrin	<0.0060		µg/L	0	GE
		Endrin	<0.0060		µg/L	0	GE
		Fluoride	<100	Y	µg/L	0	WA
		Fluoride	<100	Y	µg/L	0	WA
		Fluoride	<100		µg/L	0	GE
		Fluoride	<100		µg/L	0	GE
		Iron	<4.0		µg/L	0	GE
		Iron	<4.0		µg/L	0	GE
		Iron	4.4		µg/L	0	GE
		Iron	12	J3Y	µg/L	0	WA
		Iron	64	Y	µg/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 3 collected on 07/17/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Iron	<4.0		µg/L	0	GE
		Iron	<4.0		µg/L	0	GE
		Lead	<3.0	Y	µg/L	0	WA
		Lead	<3.0	Y	µg/L	0	WA
		Lead	<3.0		µg/L	0	GE
		Lead	<3.0		µg/L	0	GE
		Lindane	<0.055	Y	µg/L	0	WA
		Lindane	<0.055	Y	µg/L	0	WA
		Lindane	<0.0050		µg/L	0	GE
		Lindane	<0.0050		µg/L	0	GE
		Magnesium	166	VY	µg/L	0	WA
		Magnesium	176	VY	µg/L	0	WA
		Magnesium	180		µg/L	0	GE
		Magnesium	184		µg/L	0	GE
		Manganese	<2.0	Y	µg/L	0	WA
		Manganese	<2.0	Y	µg/L	0	WA
		Manganese	<2.0		µg/L	0	GE
		Manganese	<2.0		µg/L	0	GE
		Mercury	<0.20	Y	µg/L	0	WA
		Mercury	<0.20	Y	µg/L	0	WA
		Mercury	<0.20		µg/L	0	GE
		Mercury	<0.20		µg/L	0	GE
		Methoxychlor	<0.55	Y	µg/L	0	WA
		Methoxychlor	<0.55	Y	µg/L	0	WA
		Methoxychlor	<0.50		µg/L	0	GE
		Methoxychlor	<0.50		µg/L	0	GE
		Nitrate as nitrogen	36	Y	µg/L	0	WA
		Nitrate as nitrogen	39	YY	µg/L	0	WA
		Nitrate as nitrogen	42	Y	µg/L	0	WA
		Nitrate-nitrite as nitrogen	<50		µg/L	0	GE
		Nitrate-nitrite as nitrogen	180		µg/L	0	GE
		Phenols	<5.0	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Phenols	<5.0		µg/L	0	GE
		Phenols	<5.0		µg/L	0	GE
		Potassium	<500	Y	µg/L	0	WA
		Potassium	<500	Y	µg/L	0	WA
		Potassium	<500		µg/L	0	GE
		Potassium	<500		µg/L	0	GE
		Selenium	<2.0	Y	µg/L	0	WA
		Selenium	<2.0	Y	µg/L	0	WA
		Selenium	<2.0	J1	µg/L	0	GE
		Selenium	<2.0	J1	µg/L	0	GE
		Silica	5,500	Y	µg/L	0	WA
		Silica	5,530	Y	µg/L	0	WA
		Silica	5,890		µg/L	0	GE
		Silica	5,860		µg/L	0	GE
		Silver	<2.0	Y	µg/L	0	WA
		Silver	<2.0	Y	µg/L	0	WA
		Silver	<2.0		µg/L	0	GE
		Silver	<2.0		µg/L	0	GE
		Sodium	24,800	VY	µg/L	0	WA
		Sodium	27,100	VY	µg/L	0	WA
		Sodium	26,300	J2	µg/L	0	GE
		Sodium	28,300	J2	µg/L	0	GE

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 3 collected on 07/17/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Sulfate	32,400	Y	µg/L	0	WA
		Sulfate	32,900	Y	µg/L	0	WA
		Sulfate	33,100	Y	µg/L	0	WA
		Sulfate	31,300		µg/L	0	GE
		Sulfate	30,100		µg/L	0	GE
		Total dissolved solids	111,000	Y	µg/L	0	WA
		Total dissolved solids	95,000	Y	µg/L	0	WA
		Total dissolved solids	101,000	V	µg/L	0	GE
		Total dissolved solids	92,000	V	µg/L	0	GE
		Total dissolved solids	98,000	V	µg/L	0	GE
		Total organic carbon	1,560	Y	µg/L	0	WA
		Total organic carbon	1,850	Y	µg/L	0	WA
		Total organic carbon	<1,000		µg/L	0	GE
		Total organic carbon	<1,000		µg/L	0	GE
		Total organic carbon	1,220		µg/L	0	GE
		Total organic halogens	16	Y	µg/L	0	WA
		Total organic halogens	20	Y	µg/L	0	WA
		Total organic halogens	46		µg/L	1	GE
		Total organic halogens	<5.0		µg/L	0	GE
		Total organic halogens	<5.0		µg/L	0	GE
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Total phosphates (as P)	<50		µg/L	0	GE
		Total phosphates (as P)	<50		µg/L	0	GE
		Total phosphates (as P)	<50		µg/L	0	GE
		Toxaphene	<1.1	Y	µg/L	0	WA
		Toxaphene	<1.1	Y	µg/L	0	WA
		Toxaphene	<0.24		µg/L	0	GE
		Toxaphene	<0.24		µg/L	0	GE
		2,4,5-TP (Silvex)	<0.56	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.56	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.090		µg/L	0	GE
		2,4,5-TP (Silvex)	<0.090		µg/L	0	GE
		Gross alpha	<7.0E-01		pCi/L	0	TM
		Gross alpha	<7.0E-01		pCi/L	0	TM
		Gross alpha	<2.0E +00		pCi/L	0	GE
		Gross alpha	<2.0E +00		pCi/L	0	GE
		Gross alpha	<2.0E +00		pCi/L	0	GE
		Nonvolatile beta	<9.0E-01		pCi/L	0	TM
		Nonvolatile beta	1.2E +00 ± 2.0E +00		pCi/L	0	TM
		Nonvolatile beta	<2.0E +00		pCi/L	0	GE
		Nonvolatile beta	<2.0E +00		pCi/L	0	GE
		Nonvolatile beta	<2.0E +00		pCi/L	0	GE
		Radium-226	<2.1E-01		pCi/L	0	TM
		Radium-226	<2.6E-01		pCi/L	0	TM
		Radium-228	6.7E +00 ± 1.8E +00		pCi/L	0	TM
		Radium-228	1.9E +00 ± 1.5E +00		pCi/L	0	TM
		Radium, total alpha-emitting	<1.0E +00		pCi/L	0	GE
		Radium, total alpha-emitting	<1.0E +00		pCi/L	0	GE
		Tritium	2.3E +00 ± 5.7E-01		pCi/mL	0	GE
		Tritium	1.8E +00 ± 5.5E-01		pCi/mL	0	GE
		Tritium	2.4E +00 ± 4.2E-01		pCi/mL	0	TM
		Tritium	2.1E +00 ± 3.7E-01		pCi/mL	0	TM

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 4

<u>SRS Coord.</u>	<u>Lat/Longitude</u>	<u>Screen Zone Elevation</u>	<u>Top of Casing</u>	<u>Casing</u>	<u>Pump</u>	<u>Formation</u>
N53053.5	33.212743 °N	208.0-178.0 ft msl	260 ft msl	4" PVC	S	Water table
E42676.4	81.657484 °W					

FIELD MEASUREMENTS

Sample date: 07/17/93

Time: 17:12

Depth to water: 38.86 ft (11.84 m) below TOC

pH: 5.1

Water elevation: 221.14 ft (67.40 m) msl

Alkalinity: 1 mg/L

Sp. conductance: 80 μ S/cm

Water temperature: 19.1 °C

Turbidity: 3.3 NTU

Water evacuated before sampling: 149 gal

Volumes purged: 5.3 well volumes

LABORATORY ANALYSES

<u>H</u>	<u>D</u>	<u>Analyte</u>	<u>Result</u>	<u>Mod</u>	<u>Unit</u>	<u>Flag</u>	<u>Lab</u>
●		pH	5.1	JY	pH	0	WA
●		Specific conductance	62	JY	μ S/cm	0	WA
●		Turbidity	1.2	JY	NTU	0	WA
		Aluminum	201	Y	μ g/L	2	WA
		Arsenic	<2.0	Y	μ g/L	0	WA
		Barium	7.0	Y	μ g/L	0	WA
		Cadmium	<2.0	Y	μ g/L	0	WA
		Calcium	283	Y	μ g/L	0	WA
		Chloride	6,070	Y	μ g/L	0	WA
		Chromium	8.9	Y	μ g/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	μ g/L	0	WA
		Endrin	<0.11	Y	μ g/L	0	WA
		Fluoride	<100	Y	μ g/L	0	WA
		Iron	544	Y	μ g/L	2	WA
		Lead	<3.0	Y	μ g/L	0	WA
		Lindane	<0.055	Y	μ g/L	0	WA
		Magnesium	405	VY	μ g/L	0	WA
		Manganese	6.3	Y	μ g/L	0	WA
		Mercury	<0.20	Y	μ g/L	0	WA
		Methoxychlor	<0.55	Y	μ g/L	0	WA
		Nitrate as nitrogen	119	Y	μ g/L	0	WA
		Phenols	<5.0	Y	μ g/L	0	WA
		Potassium	<500	Y	μ g/L	0	WA
		Selenium	<2.0	Y	μ g/L	0	WA
		Silica	6,150	Y	μ g/L	0	WA
		Silver	<2.0	Y	μ g/L	0	WA
		Sodium	11,600	VY	μ g/L	0	WA
		Sulfate	11,800	Y	μ g/L	0	WA
		Total dissolved solids	49,000	Y	μ g/L	0	WA
		Total organic carbon	1,180	Y	μ g/L	0	WA
		Total organic halogens	<5.0	Y	μ g/L	0	WA
		Total organic halogens	<5.0	Y	μ g/L	0	WA
		Total phosphates (as P)	<50	Y	μ g/L	0	WA
		Toxaphene	<1.1	Y	μ g/L	0	WA
		2,4,5-TP (Silvex)	<0.56	Y	μ g/L	0	WA
		Gross alpha	9.0E-01 ± 1.3E+00		pCi/L	0	TM
		Nonvolatile beta	<9.0E-01		pCi/L	0	TM
		Radium-226	3.7E-01 ± 2.2E-01		pCi/L	0	TM
		Radium-228	3.5E+00 ± 1.5E+00		pCi/L	0	TM

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 4 collected on 07/17/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Tritium	1.5E+00 ± 3.5E-01		pCi/mL	0	TM

WELL KAC 5

SRS Coord.	Lat/Longitude	Screen Zone Elevation	Top of Casing	Casing	Pump	Formation
N53161.7	33.213047 °N	224.3-204.3 ft msl	259 ft msl	4" PVC	S	Water table
E42716.3	81.657589 °W					

FIELD MEASUREMENTS

Sample date: 07/17/93
Depth to water: 34.51 ft (10.52 m) below TOC
Water elevation: 224.49 ft (68.43 m) msl
Sp. conductance: 61 μ S/cm
Turbidity: 1.8 NTU
Water evacuated before sampling: 61 gal

Time: 16:13
pH: 5.3
Alkalinity: 3 mg/L
Water temperature: 20.5 °C

Volumes purged: 4.6 well volumes

LABORATORY ANALYSES

H	D	Analyte	Result	Mod	Unit	Flag	Lab
●		pH	5.2	JY	pH	0	WA
●		Specific conductance	51	JY	μ S/cm	0	WA
●		Turbidity	0.32	JY	NTU	0	WA
		Aluminum	<20	Y	μ g/L	0	WA
		Arsenic	<2.0	Y	μ g/L	0	WA
		Barium	<4.0	Y	μ g/L	0	WA
		Cadmium	<2.0	Y	μ g/L	0	WA
		Calcium	442	Y	μ g/L	0	WA
		Chloride	5,450	Y	μ g/L	0	WA
		Chromium	<4.0	Y	μ g/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	μ g/L	0	WA
		Endrin	<0.11	Y	μ g/L	0	WA
		Fluoride	<100	Y	μ g/L	0	WA
		Fluoride	<100	Y	μ g/L	0	WA
		Iron	76	Y	μ g/L	0	WA
		Lead	<3.0	Y	μ g/L	0	WA
		Lindane	<0.055	Y	μ g/L	0	WA
		Magnesium	251	VY	μ g/L	0	WA
		Manganese	5.8	Y	μ g/L	0	WA
		Mercury	<0.20	Y	μ g/L	0	WA
		Methoxychlor	<0.55	Y	μ g/L	0	WA
		Nitrate as nitrogen	229	Y	μ g/L	0	WA
		Phenols	<5.0	Y	μ g/L	0	WA
		Potassium	578	J3Y	μ g/L	0	WA
		Selenium	<2.0	Y	μ g/L	0	WA
		Silica	6,190	Y	μ g/L	0	WA
		Silver	<2.0	Y	μ g/L	0	WA
		Sodium	9,020	VY	μ g/L	0	WA
		Sulfate	9,000	Y	μ g/L	0	WA
		Total dissolved solids	46,000	Y	μ g/L	0	WA
		Total organic carbon	1,080	Y	μ g/L	0	WA
		Total organic halogens	26	Y	μ g/L	1	WA
		Total phosphates (as P)	<50	Y	μ g/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 5 collected on 07/17/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Toxaphene	<1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.55	Y	µg/L	0	WA
		Gross alpha	<5.0E-01		pCi/L	0	TM
		Nonvolatile beta	2.0E+00 ± 1.9E+00		pCi/L	0	TM
		Radium-226	<2.1E-01		pCi/L	0	TM
		Radium-228	2.5E+00 ± 1.4E+00		pCi/L	0	TM
		Tritium	2.6E-01 ± 2.6E-01		pCi/mL	0	TM

WELL KAC 6

SRS Coord.	Lat/Longitude	Screen Zone Elevation	Top of Casing	Casing	Pump	Formation
N53139.9 E42693.5	33.212962 °N 81.657606 °W	224.6-204.6 ft msl	259 ft msl	4" PVC	S	Water table

FIELD MEASUREMENTS

Sample date: 07/18/93
Depth to water: 34.71 ft (10.58 m) below TOC
Water elevation: 224.29 ft (68.36 m) msl
Sp. conductance: 88 µS/cm
Turbidity: 17.9 NTU
Water evacuated before sampling: 11 gal
The well went dry during purging.

Time: 10:00
pH: 5.4
Alkalinity: 2 mg/L
Water temperature: 20.2 °C
Volumes purged: 0.9 well volumes

LABORATORY ANALYSES

H	D	Analyte	Result	Mod	Unit	Flag	Lab
●		pH	5.2	JY	pH	0	WA
●		Specific conductance	76	JY	µS/cm	0	WA
●		Turbidity	7.8	JY	NTU	0	WA
		Aluminum	1,220	Y	µg/L	2	WA
		Arsenic	<2.0	Y	µg/L	0	WA
		Barium	6.0	Y	µg/L	0	WA
		Cadmium	<2.0	Y	µg/L	0	WA
		Calcium	254	Y	µg/L	0	WA
		Chloride	5,530	Y	µg/L	0	WA
		Chromium	6.0	J3Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	µg/L	0	WA
		Endrin	<0.11	Y	µg/L	0	WA
		Fluoride	<100	Y	µg/L	0	WA
		Iron	793	Y	µg/L	2	WA
		Lead	<3.0	Y	µg/L	0	WA
		Lindane	<0.055	Y	µg/L	0	WA
		Magnesium	230	VY	µg/L	0	WA
		Manganese	7.6	Y	µg/L	0	WA
		Mercury	<0.20	Y	µg/L	0	WA
		Methoxychlor	<0.55	Y	µg/L	0	WA
		Nitrate as nitrogen	222	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Potassium	764	J3Y	µg/L	0	WA
		Selenium	<2.0	Y	µg/L	0	WA
		Silica	6,470	Y	µg/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 6 collected on 07/18/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Silver	<2.0	Y	µg/L	0	WA
		Sodium	14,300	VY	µg/L	0	WA
		Sulfate	18,400	Y	µg/L	0	WA
		Total dissolved solids	56,000	Y	µg/L	0	WA
		Total organic carbon	<1,000	Y	µg/L	0	WA
		Total organic halogens	21	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Toxaphene	<1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.56	Y	µg/L	0	WA
		Gross alpha	<6.0E-01		pCi/L	0	TM
		Gross alpha	<6.0E-01		pCi/L	0	TM
		Nonvolatile beta	1.8E+00 ± 2.0E+00		pCi/L	0	TM
		Nonvolatile beta	2.5E+00 ± 2.1E+00		pCi/L	0	TM
		Radium-226	<2.2E-01		pCi/L	0	TM
		Radium-226	<2.0E-01		pCi/L	0	TM
		Radium-228	<0.0E+00		pCi/L	0	TM
		Radium-228	9.0E-01 ± 1.3E+00		pCi/L	0	TM
		Tritium	6.4E-01 ± 2.6E-01		pCi/mL	0	TM
		Tritium	5.9E-01 ± 2.5E-01		pCi/mL	0	TM

WELL KAC 7

SRS Coord.	Lat/Longitude	Screen Zone Elevation	Top of Casing	Casing	Pump	Formation
N53252.9	33.213018 °N	223.0-203.0 ft msl	265.1 ft msl	4" PVC	S	Water table
E42574.5	81.658139 °W					

FIELD MEASUREMENTS

Sample date: 07/18/93
Depth to water: 43.02 ft (13.11 m) below TOC
Water elevation: 222.08 ft (67.69 m) msl
Sp. conductance: 108 µS/cm
Turbidity: 9.8 NTU
Water evacuated before sampling: 11 gal
The well went dry during purging.

Time: 12:36
pH: 5.9
Alkalinity: 24 mg/L
Water temperature: 21.8 °C
Volumes purged: 0.9 well volumes

LABORATORY ANALYSES

H	D	Analyte	Result	Mod	Unit	Flag	Lab
•		pH	5.8	JY	pH	0	WA
•		pH	5.8	JY	pH	0	WA
•		Specific conductance	92	JY	µS/cm	0	WA
•		Specific conductance	93	JY	µS/cm	0	WA
•		Turbidity	4.6	JY	NTU	0	WA
		Aluminum	986	Y	µg/L	2	WA
		Arsenic	<2.0	Y	µg/L	0	WA
		Barium	4.7	J3Y	µg/L	0	WA
		Cadmium	<2.0	Y	µg/L	0	WA
		Calcium	3,190	Y	µg/L	0	WA
		Chloride	5,580	Y	µg/L	0	WA
		Chromium	23	Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	µg/L	0	WA
		Endrin	<0.11	Y	µg/L	0	WA

• = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 7 collected on 07/18/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Fluoride	<100	Y	µg/L	0	WA
		Iron	515	Y	µg/L	2	WA
		Lead	8.9	J3Y	µg/L	1	WA
		Lindane	<0.054	Y	µg/L	0	WA
		Magnesium	78	VY	µg/L	0	WA
		Manganese	3.6	Y	µg/L	0	WA
		Mercury	<0.20	Y	µg/L	0	WA
		Methoxychlor	<0.54	Y	µg/L	0	WA
		Nitrate as nitrogen	1,670	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Potassium	<500	Y	µg/L	0	WA
		Selenium	<2.0	Y	µg/L	0	WA
		Silica	5,460	Y	µg/L	0	WA
		Silver	<2.0	Y	µg/L	0	WA
		Sodium	15,600	VY	µg/L	0	WA
		Sulfate	4,780	Y	µg/L	0	WA
		Sulfate	4,780	Y	µg/L	0	WA
		Total dissolved solids	62,000	Y	µg/L	0	WA
		Total organic carbon	<1,000	Y	µg/L	0	WA
		Total organic halogens	<5.0	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Toxaphene	<1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.53	Y	µg/L	0	WA
		Gross alpha	<7.0E-01		pCi/L	0	TM
		Nonvolatile beta	<1.0E+00		pCi/L	0	TM
		Radium-226	<1.9E-01		pCi/L	0	TM
		Radium-228	1.7E+01 ± 1.5E+01		pCi/L	1	TM
		Tritium	7.1E+00 ± 6.1E-01		pCi/mL	0	TM

WELL KAC 8

<u>SRS Coord.</u>	<u>Lat/Longitude</u>	<u>Screen Zone Elevation</u>	<u>Top of Casing</u>	<u>Casing</u>	<u>Pump</u>	<u>Formation</u>
N53136.0 E42641.9	33.212869 °N 81.657734 °W	217.1-197.1 ft msl	267.1 ft msl	4" PVC	S	Water table

FIELD MEASUREMENTS

Sample date: 07/18/93
Depth to water: 40.06 ft (12.21 m) below TOC
Water elevation: 227.04 ft (69.20 m) msl
Sp. conductance: 231 µS/cm
Turbidity: 0.5 NTU
Water evacuated before sampling: 64 gal

Time: 11:03
pH: 5.6
Alkalinity: 5 mg/L
Water temperature: 20.4 °C
Volumes purged: 3.3 well volumes

LABORATORY ANALYSES

H	D	Analyte	Result	Mod	Unit	Flag	Lab
•		pH	5.5	JY	pH	0	WA
•		Specific conductance	207	JY	µS/cm	0	WA
•		Turbidity	<0.20	J	NTU	0	WA
		Aluminum	<20	Y	µg/L	0	WA
		Aluminum	20	J3Y	µg/L	0	WA

• = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 8 collected on 07/18/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Arsenic	<2.0	Y	µg/L	0	WA
		Arsenic	<2.0	Y	µg/L	0	WA
		Barium	9.0	Y	µg/L	0	WA
		Barium	9.9	Y	µg/L	0	WA
		Benzene	<5.0	Y	µg/L	0	WA
		Benzene	<5.0	Y	µg/L	0	WA
		Bromodichloromethane	<5.0	Y	µg/L	0	WA
		Bromodichloromethane	<5.0	Y	µg/L	0	WA
		Bromodichloromethane	<5.0	Y	µg/L	0	WA
		Bromoform	<5.0	Y	µg/L	0	WA
		Bromoform	<5.0	Y	µg/L	0	WA
		Bromoform	<5.0	Y	µg/L	0	WA
		Bromomethane (Methyl bromide)	<10	Y	µg/L	0	WA
		Bromomethane (Methyl bromide)	<10	Y	µg/L	0	WA
		Bromomethane (Methyl bromide)	<10	Y	µg/L	0	WA
		Cadmium	<2.0	Y	µg/L	0	WA
		Cadmium	<2.0	Y	µg/L	0	WA
		Calcium	840	VY	µg/L	0	WA
		Calcium	884	VY	µg/L	0	WA
		Carbon tetrachloride	<5.0	Y	µg/L	0	WA
		Carbon tetrachloride	<5.0	Y	µg/L	0	WA
		Carbon tetrachloride	<5.0	Y	µg/L	0	WA
		Chloride	7,150	Y	µg/L	0	WA
		Chlorobenzene	<5.0	Y	µg/L	0	WA
		Chlorobenzene	<5.0	Y	µg/L	0	WA
		Chloroethane	<10	Y	µg/L	0	WA
		Chloroethane	<10	Y	µg/L	0	WA
		Chloroethane	<10	Y	µg/L	0	WA
		Chloroethene (Vinyl chloride)	<10	Y	µg/L	0	WA
		Chloroethene (Vinyl chloride)	<10	Y	µg/L	0	WA
		Chloroethene (Vinyl chloride)	<10	Y	µg/L	0	WA
		2-Chloroethyl vinyl ether	<10	Y	µg/L	0	WA
		2-Chloroethyl vinyl ether	<10	Y	µg/L	0	WA
		2-Chloroethyl vinyl ether	<10	Y	µg/L	0	WA
		Chloroform	1.9	JY	µg/L	0	WA
		Chloroform	2.0	JY	µg/L	0	WA
		Chloroform	2.1	JY	µg/L	0	WA
		Chloromethane (Methyl chloride)	<10	Y	µg/L	0	WA
		Chloromethane (Methyl chloride)	<10	Y	µg/L	0	WA
		Chloromethane (Methyl chloride)	<10	Y	µg/L	0	WA
		Chromium	<4.0	Y	µg/L	0	WA
		Chromium	<4.0	Y	µg/L	0	WA
		Dibromochloromethane	<5.0	Y	µg/L	0	WA
		Dibromochloromethane	<5.0	Y	µg/L	0	WA
		Dibromochloromethane	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,2-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,2-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,2-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethylene	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethylene	<5.0	Y	µg/L	0	WA
		trans-1,2-Dichloroethylene	<5.0	Y	µg/L	0	WA
		trans-1,2-Dichloroethylene	<5.0	Y	µg/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 8 collected on 07/18/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		trans-1,2-Dichloroethylene	< 5.0		µg/L	0	WA
		Dichloromethane (Methylene chloride)	< 5.0	Y	µg/L	0	WA
		Dichloromethane (Methylene chloride)	< 5.0	Y	µg/L	0	WA
■		Dichloromethane (Methylene chloride)	5.4	Y	µg/L	2	WA
		2,4-Dichlorophenoxyacetic acid	< 1.1	Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	< 2.2	Y	µg/L	0	WA
		1,2-Dichloropropane	< 5.0	Y	µg/L	0	WA
		1,2-Dichloropropane	< 5.0	Y	µg/L	0	WA
		1,2-Dichloropropane	< 5.0	Y	µg/L	0	WA
		cis-1,3-Dichloropropene	< 5.0	Y	µg/L	0	WA
		cis-1,3-Dichloropropene	< 5.0	Y	µg/L	0	WA
		cis-1,3-Dichloropropene	< 5.0	Y	µg/L	0	WA
		trans-1,3-Dichloropropene	< 5.0	Y	µg/L	0	WA
		trans-1,3-Dichloropropene	< 5.0	Y	µg/L	0	WA
		trans-1,3-Dichloropropene	< 5.0	Y	µg/L	0	WA
		Endrin	< 0.12	Y	µg/L	0	WA
		Ethylbenzene	< 5.0	Y	µg/L	0	WA
		Ethylbenzene	< 5.0	Y	µg/L	0	WA
		Ethylbenzene	< 5.0	Y	µg/L	0	WA
		Fluoride	< 100	Y	µg/L	0	WA
		Iron	179	VY	µg/L	1	WA
		Iron	186	VY	µg/L	1	WA
		Lead	3.7	J3Y	µg/L	0	WA
		Lead	3.7	J3Y	µg/L	0	WA
		Lindane	< 0.059	Y	µg/L	0	WA
		Lithium	< 5.2	Y	µg/L	0	WA
		Lithium	< 5.2	Y	µg/L	0	WA
		Magnesium	540	Y	µg/L	0	WA
		Magnesium	551	Y	µg/L	0	WA
		Manganese	15	Y	µg/L	0	WA
		Manganese	15	Y	µg/L	0	WA
		Mercury	< 0.20	Y	µg/L	0	WA
		Methoxychlor	< 0.59	Y	µg/L	0	WA
		Nitrate as nitrogen	300	Y	µg/L	0	WA
		Phenols	< 5.0	Y	µg/L	0	WA
		Potassium	< 500	Y	µg/L	0	WA
		Potassium	< 500	Y	µg/L	0	WA
		Selenium	< 2.0	Y	µg/L	0	WA
		Selenium	< 2.0	Y	µg/L	0	WA
		Silica	5,250	Y	µg/L	0	WA
		Silica	5,360	Y	µg/L	0	WA
		Silver	< 2.0	Y	µg/L	0	WA
		Silver	< 2.0	Y	µg/L	0	WA
		Sodium	38,300	VY	µg/L	0	WA
		Sodium	40,900	VY	µg/L	0	WA
		Sulfate	72,100	Y	µg/L	0	WA
		1,1,2,2-Tetrachloroethane	< 5.0	Y	µg/L	0	WA
		1,1,2,2-Tetrachloroethane	< 5.0	Y	µg/L	0	WA
		1,1,2,2-Tetrachloroethane	< 5.0	Y	µg/L	0	WA
		Tetrachloroethylene	< 5.0	Y	µg/L	0	WA
		Tetrachloroethylene	< 5.0	Y	µg/L	0	WA
		Tetrachloroethylene	< 5.0	Y	µg/L	0	WA
		Toluene	< 5.0	Y	µg/L	0	WA
		Toluene	< 5.0	Y	µg/L	0	WA
		Total dissolved solids	153,000	Y	µg/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 8 collected on 07/18/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Total organic carbon	<1,000	Y	µg/L	0	WA
		Total organic carbon	<1,000	Y	µg/L	0	WA
		Total organic halogens	21	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA
		Toxaphene	<1.2	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.55	Y	µg/L	0	WA
		1,1,1-Trichloroethane	<5.0	Y	µg/L	0	WA
		1,1,1-Trichloroethane	<5.0	Y	µg/L	0	WA
		1,1,1-Trichloroethane	<5.0	Y	µg/L	0	WA
		1,1,2-Trichloroethane	<5.0	Y	µg/L	0	WA
		1,1,2-Trichloroethane	<5.0	Y	µg/L	0	WA
		Trichloroethylene	<5.0	Y	µg/L	0	WA
		Trichloroethylene	<5.0	Y	µg/L	0	WA
		Trichlorofluoromethane	<5.0	Y	µg/L	0	WA
		Trichlorofluoromethane	<5.0	Y	µg/L	0	WA
		Trichlorofluoromethane	<5.0	Y	µg/L	0	WA
		Gross alpha	2.6E+00 ± 1.9E+00		pCi/L	0	TM
		Gross alpha	<7.0E-01		pCi/L	0	TM
		Nonvolatile beta	1.6E+00 ± 2.1E+00		pCi/L	0	TM
		Nonvolatile beta	1.3E+00 ± 2.1E+00		pCi/L	0	TM
		Radium-226	8.8E-01 ± 3.4E-01		pCi/L	0	TM
		Radium-226	4.6E-01 ± 2.5E-01		pCi/L	0	TM
		Radium-228	2.5E+00 ± 1.5E+00		pCi/L	0	TM
		Radium-228	2.8E+00 ± 1.6E+00		pCi/L	0	TM
		Tritium	5.8E-01 ± 2.8E-01		pCi/mL	0	TM
		Tritium	2.6E-01 ± 2.5E-01		pCi/mL	0	TM

WELL KAC 9

SRS Coord.	Lat/Longitude	Screen Zone Elevation	Top of Casing	Casing	Pump	Formation
N53197.8	33.212918 °N	210.9-190.9 ft msl	262.2 ft msl	4" PVC	S	Water table
E42588.1	81.657996 °W					

FIELD MEASUREMENTS

Sample date: 07/18/93

Time: 12:01

Depth to water: 45.27 ft (13.80 m) below TOC

pH: 8.0

Water elevation: 216.93 ft (66.12 m) msl

Alkalinity: 53 mg/L

Sp. conductance: 740 µS/cm

Water temperature: 20.5 °C

Turbidity: 1.2 NTU

Water evacuated before sampling: 74 gal

Volumes purged: 4.3 well volumes

LABORATORY ANALYSES

H	D	Analyte	Result	Mod	Unit	Flag	Lab
●		pH	7.3	JY	pH	0	WA
●		Specific conductance	670	JY	µS/cm	2	WA
●		Turbidity	0.53	JY	NTU	0	WA
●		Turbidity	0.53	JY	NTU	0	WA
		Aluminum	401	Y	µg/L	2	WA
		Arsenic	<2.0	Y	µg/L	0	WA

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 9 collected on 07/18/93, laboratory analyses (cont.)

H	D	Analyte	Result	Mod	Unit	Flag	Lab
		Barium	14	Y	µg/L	0	WA
		Benzene	<5.0	Y	µg/L	0	WA
		Bromodichloromethane	<5.0	Y	µg/L	0	WA
		Bromoform	<5.0	Y	µg/L	0	WA
		Bromomethane (Methyl bromide)	<10	Y	µg/L	0	WA
		Cadmium	<2.0	Y	µg/L	0	WA
		Calcium	16,300	VY	µg/L	0	WA
		Carbon tetrachloride	<5.0	Y	µg/L	0	WA
		Chloride	13,200	Y	µg/L	0	WA
		Chlorobenzene	<5.0	Y	µg/L	0	WA
		Chloroethane	<10	Y	µg/L	0	WA
		Chloroethene (Vinyl chloride)	<10	Y	µg/L	0	WA
		2-Chloroethyl vinyl ether	<10	Y	µg/L	0	WA
		Chloroform	<5.0	Y	µg/L	0	WA
		Chloromethane (Methyl chloride)	1.8	JY	µg/L	0	WA
		Chromium	25	Y	µg/L	0	WA
		Dibromochloromethane	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,2-Dichloroethane	<5.0	Y	µg/L	0	WA
		1,1-Dichloroethylene	<5.0	Y	µg/L	0	WA
		trans-1,2-Dichloroethylene	<5.0	Y	µg/L	0	WA
		Dichloromethane (Methylene chloride)	<5.0	Y	µg/L	0	WA
		2,4-Dichlorophenoxyacetic acid	<1.1	Y	µg/L	0	WA
		1,2-Dichloropropane	<5.0	Y	µg/L	0	WA
		cis-1,3-Dichloropropene	<5.0	Y	µg/L	0	WA
		trans-1,3-Dichloropropene	<5.0	Y	µg/L	0	WA
		Endrin	<0.11	Y	µg/L	0	WA
		Ethylbenzene	<5.0	Y	µg/L	0	WA
		Fluoride	105	Y	µg/L	0	WA
		Fluoride	106	Y	µg/L	0	WA
		Iron	140	VY	µg/L	0	WA
		Lead	4.7	J3Y	µg/L	0	WA
		Lindane	<0.055	Y	µg/L	0	WA
		Lithium	<5.2	Y	µg/L	0	WA
		Magnesium	1,030	Y	µg/L	0	WA
		Manganese	11	Y	µg/L	0	WA
		Mercury	<0.20	Y	µg/L	0	WA
		Methoxychlor	<0.55	Y	µg/L	0	WA
		Nitrate as nitrogen	886	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Phenols	<5.0	Y	µg/L	0	WA
		Potassium	1,390	Y	µg/L	0	WA
		Selenium	<2.0	Y	µg/L	0	WA
		Silica	8,420	Y	µg/L	0	WA
		Silver	<2.0	Y	µg/L	0	WA
		Sodium	131,000	VY	µg/L	0	WA
		Sulfate	264,000	Y	µg/L	1	WA
		1,1,2,2-Tetrachloroethane	<5.0	Y	µg/L	0	WA
		Tetrachloroethylene	<5.0	Y	µg/L	0	WA
		Toluene	<5.0	Y	µg/L	0	WA
		Total dissolved solids	479,000	Y	µg/L	0	WA
		Total organic carbon	2,160	Y	µg/L	0	WA
		Total organic halogens	13	Y	µg/L	0	WA
		Total organic halogens	14	Y	µg/L	0	WA
		Total phosphates (as P)	<50	Y	µg/L	0	WA

• = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

WELL KAC 9 collected on 07/18/93, laboratory analyses (cont.)

H	D	<u>Analyte</u>	<u>Result</u>	<u>Mod</u>	<u>Unit</u>	<u>Flag</u>	<u>Lab</u>
		Toxaphene	< 1.1	Y	µg/L	0	WA
		2,4,5-TP (Silvex)	<0.55	Y	µg/L	0	WA
		1,1,1-Trichloroethane	<5.0	Y	µg/L	0	WA
		1,1,2-Trichloroethane	<5.0	Y	µg/L	0	WA
		Trichloroethylene	<5.0	Y	µg/L	0	WA
		Trichlorofluoromethane	<5.0	Y	µg/L	0	WA
		Gross alpha	<8.0E-01		pCi/L	0	TM
		Nonvolatile beta	2.1E+00 ± 2.2E+00		pCi/L	0	TM
		Radium-226	<2.7E-01		pCi/L	0	TM
		Radium-228	1.7E+00 ± 1.4E+00		pCi/L	0	TM
		Tritium	2.6E+00 ± 4.2E-01		pCi/mL	0	TM

● = exceeded holding time. ■ = exceeded screening level or final primary drinking water standard.

Appendix E – Data Quality/Useability Assessment

Data Quality/Usability Assessment

Quality assurance/quality control (QA/QC) procedures relating to accuracy and precision of analyses performed on groundwater samples are followed in the field and laboratory and are reviewed prior to publication of results. The Environmental Protection Department/Environmental Monitoring Section's (EPD/EMS) review of the volume of analytical data acquired each quarter and presented in various reports is an ongoing process; its review of the QA/QC data cannot be completed in time to meet the deadlines for the reports required by the Resource Conservation and Recovery Act and associated regulations. Other site and regulatory personnel can obtain further information on the data quality and usability in a variety of ways, including those described below.

Data Qualification

The contract laboratories continually assess their own accuracy and precision according to U.S. Environmental Protection Agency (EPA) guidelines. They submit sample- or batch-specific QA/QC information either at the same time as analytical results or in a quarterly summary. Properly defined and used result modifiers (also referred to as qualifiers) can be a key component in assessing data usability. Result modifiers designed by EPD/EMS and used by the primary laboratories are presented in Appendix D.

Assessment of Accuracy of the Data

Accuracy, or the nearness of the reported result to the true concentration of a constituent in a sample, can be assessed in several ways.

A laboratory's general accuracy can be judged by analysis of results obtained from known samples. The non-radionuclide contract laboratories analyze commercial reference samples every quarter at EPD/EMS' request. The results of these analyses are presented in the EPD/EMS quarterly report, *The Savannah River Site's Groundwater Monitoring Program*. The primary laboratories also seek or maintain state certification by participating periodically in performance studies; reference samples and analysis of results are provided by EPA. Results of these studies also are published in the EPD/EMS quarterly reports.

Analysis of blanks provides a tool for assessing the accuracy of both sampling and laboratory analysis. Results for all field blanks for the quarter can be found in the EPD/EMS quarterly reports. Any field or laboratory blanks that exceeded established minimums are identified in the same reports, in tables associating them with groundwater samples analyzed in the same batches.

Surrogates, organic compounds similar in chemical behavior to the compounds of interest but not normally found in environmental samples, are used to monitor the effect of the matrix on the accuracy of analyses for organic parameters. For example, for analyses of volatile organics by EPA Method 8240, three surrogate compounds are added to all samples

and blanks in each analytical batch. In analyses of semivolatile organics, three to four acid compounds and three to four base/neutral compounds are used. Other surrogates are used in pesticides analyses. Percent recoveries for surrogate analyses are calculated by laboratory personnel, reported to EPD/EMS, reviewed, and entered into the database, but they are not published. If recoveries are not within specified limits, the laboratory is expected to re-run the samples or attach result qualifiers to the data identifying the anomalous results.

Sample-specific accuracy for both organic and inorganic parameters can be assessed by examination of matrix spike/matrix spike duplicate results. A sample is analyzed unspiked to determine a baseline set of values. A second portion of sample is spiked with known concentrations of compounds appropriate to the analyses being performed, typically 5 volatile organic compounds for volatile organics analyses, 11 semivolatile compounds for semivolatiles, 6 pesticide compounds for pesticides, all metals for metals analyses, and a known quantity of cyanide for cyanide analysis. The percentage of the spike compound that is recovered (i.e., measured in excess of the value obtained for the unspiked sample) is a direct measure of analytical accuracy. EPA requires matrix spike/matrix spike duplicates to be run at least once per 20 samples of similar matrix.

Matrix spike/matrix spike duplicate results are reported to EPD/EMS but are not published. For organic compounds, according to EPA guidelines, no action is taken on the basis of matrix spike/matrix spike duplicate data alone (i.e., no result modifiers are assigned solely on the basis of matrix spike results); however, the results can indicate if a lab is having a systematic problem in the analysis of one or more analytes.

In the case of inorganic compounds, such as metals, the matrix spike sample analysis provides information about the effect of each sample matrix on the digestion and measurement methodology. Data qualifiers can be assigned on the basis of the percentage of spike recovery and are reported in the published results tables.

Assessment of Precision

Precision of the analyses, or agreement of a set of replicate results among themselves, is assessed through the use of duplicates (laboratory-initiated) and blind replicates (provided by EPD/EMS). The results of duplicate and replicate analyses are presented in the results tables of the first, second, and third quarter reports. Duplicate and replicate results are not presented in fourth quarter reports; the results tables present instead only the highest result for each analyte for each quarter of the year.

The laboratories assess precision by calculating the relative percent difference, or RPD, for each pair of laboratory-initiated duplicate results. During 1992, at least one of the contract laboratories used a data qualifier (J3) to modify metals analyses when the RPD for laboratory duplicates was greater than 20%.

Additional statistical comparisons of laboratory duplicate and blind replicate results, both intra- and interlaboratory, are presented in the EPD/EMS quarterly reports. The calculation used for these reports is the MRD, or mean relative difference, which is similar to EPA's RPD except that the MRD provides a single value for all of the analyses of a particular com-

pound, either inter- or intralaboratory, during one quarter. Because detection limits may vary among samples, the MRD requires calculation of a reference detection limit, which is the detection limit at the 90th percentile of the array of limits in the population of all replicate and duplicate analyses for a given analyte during a particular quarter. The MRD is not method-specific.

Method-Specific Accuracy and Precision

The contract laboratories' EPA-approved laboratory procedures include QA/QC requirements as an integral part of the methods. Thus, knowledge of the method used in obtaining data is an important component of determining data useability. EPA has conducted extensive research and development on the methods approved for the analysis of water and waste water; information on the accuracy and precision of the method is available from EPA publications, as is full information on required QA/QC procedures. A listing of the methods used by the primary laboratories during first quarter 1992 is given below along with the source for the method description. Many, if not all, of these sources include presentations of representative accuracy and precision results.

<u>Method</u>	<u>Used to Analyze</u>	<u>Source</u>
EPA120.1	Specific conductance	EPA EMSL 1983
EPA150.1	pH	EPA EMSL 1983
EPA160.1	Filterable residue (total dissolved solids)	EPA EMSL 1983
EPA160.2	Nonfilterable residue	EPA EMSL 1983
EPA180.1	Turbidity	EPA EMSL 1983
EPA200.7	Trace elements	EPA EMSL 1983
EPA206.2	Arsenic	EPA EMSL 1983
EPA208.2	Barium	EPA EMSL 1983
EPA239.2	Lead	EPA EMSL 1983
EPA245.1	Mercury	EPA EMSL 1983
EPA270.2	Selenium	EPA EMSL 1983
EPA279.2	Thallium	EPA EMSL 1983
EPA300.0	Inorganics, non-metallics	EPA EMSL 1991
EPA310.1	Alkalinity	EPA EMSL 1983
EPA325.2	Chloride	EPA EMSL 1983
EPA335.3	Cyanide	EPA EMSL 1983
EPA340.2	Fluoride	EPA EMSL 1983
EPA353.1	Nitrogen, nitrate-nitrite	EPA EMSL 1983
EPA353.2	Nitrogen, nitrate, nitrite, or combined	EPA EMSL 1983
EPA353.3	Nitrogen, nitrate-nitrite, or nitrite only	EPA EMSL 1983
EPA354.1	Nitrogen, nitrite	EPA EMSL 1983
EPA365.1	Phosphorus, all forms (reported as total phosphates)	EPA EMSL 1983
EPA365.2	Phosphorus, all forms (reported as total phosphates)	EPA EMSL 1983
EPA375.4	Sulfate, turbidimetric	EPA EMSL 1983
EPA376.2	Sulfide	EPA EMSL 1983
APHA403	Alkalinity	APHA 1985
EPA413.1	Oil & grease	EPA EMSL 1983
APHA415A	Iodine	APHA 1985
EPA415.1	Total organic carbon	EPA EMSL 1983
EPA418.1	Petroleum hydrocarbons	EPA EMSL 1983
EPA420.1	Phenolics	EPA EMSL 1983
EPA420.2	Phenolics	EPA EMSL 1983
APHA705	Total alpha-emitting radium	APHA 1985

<u>Method</u>	<u>Used to Analyze</u>	<u>Source</u>
ASTMD3869C	Iodide	ASTM 1992
APHA5320	Dissolved organic halogen	APHA 1989
EPA6010	Metals	EPA 1986
EPA7041	Antimony	EPA 1986
EPA7060	Arsenic	EPA 1986
EPA7421	Lead	EPA 1986
EPA7470	Mercury	EPA 1986
EPA7740	Selenium	EPA 1986
EPA7841	Thallium	EPA 1986
EPA8010	Halogenated volatile organics	EPA 1986
EPA8020	Aromatic volatile organics	EPA 1986
EPA8080	Organochlorine pesticides and PCBs	EPA 1986
EPA8140	Organophosphorus pesticides	EPA 1986
EPA8150	Chlorinated herbicides	EPA 1986
EPA8240	GCMS VOA	EPA 1986
EPA8270	GCMS semivolatiles	EPA 1986
EPA8280	Dioxins and furans	EPA 1986
EPA9012	Total cyanide	EPA 1986
EPA9020	Total organic halides	EPA 1986
EPA9030	Sulfides	EPA 1986

An example of the available method-specific QA/QC information is that for the analysis of metals by EPA Method 6010/200.7 (EPA, 1986/EPA EMSL, 1983). The primary laboratories, General Engineering Laboratories (GE) and Roy F. Weston, Inc. (Weston), use this inductively coupled plasma (ICP) atomic emission spectrometric method.

The following precision and accuracy data are based on the experience of seven laboratories that applied the ICP technique to acid-distilled water matrices that had been dosed with various metal concentrates. (Note: not all seven laboratories analyzed all 14 elements.) The references give results for samples having three concentration ranges; the results here are for samples having the lowest values, similar to actual groundwater results for SRS.

ICP Precision and Accuracy Data

<u>Element</u>	<u>True value (µg/L)</u>	<u>Mean reported value (µg/L)</u>	<u>Mean percent RSD^a</u>
Aluminum	60	62	33
Arsenic	22	19	23
Beryllium	20	20	9.8
Cadmium	2.5	2.9	16
Chromium	10	10	18
Cobalt	20	20	4.1
Copper	11	11	40
Iron	20	19	15
Lead	24	30	32
Manganese	15	15	6.7
Nickel	30	28	11
Selenium	6	8.5	42

<u>Element</u>	<u>True value (µg/L)</u>	<u>Mean reported value (µg/L)</u>	<u>Mean percent RSD^a</u>
Vanadium	70	69	2.9
Zinc	16	19	45

Note: In EPA (1986), the column heading is Mean Standard Deviation (%).

^a Relative standard deviation.

As another example, EPA Method 601/8010 (EPA, 1991/EPA, 1986) is used by both GE and Weston for analyses of halogenated volatile organics. In the presentation of the method in both references, the following table gives method-specific accuracy and precision as functions of concentration. Contract laboratories are expected to achieve or at least approach these limits.

Accuracy and Precision as Functions of Concentration for EPA Method 601/8010

<u>Parameter</u>	<u>Accuracy as recovery, X'^a (µg/L)</u>	<u>Single analyst precision (µg/L)^b</u>	<u>Overall precision (µg/L)^c</u>
Bromodichloromethane	1.12C - 1.02 ^d	0.11 \bar{X} + 0.04 ^e	0.20 \bar{X} + 1.00
Bromoform	0.96C - 2.05	0.12 \bar{X} + 0.58	0.21 \bar{X} + 2.41
Bromomethane	0.76C - 1.27	0.28 \bar{X} + 0.27	0.36 \bar{X} + 0.94
Carbon tetrachloride	0.98C - 1.04	0.15 \bar{X} + 0.38	0.20 \bar{X} + 0.39
Chlorobenzene	1.00C - 1.23	0.15 \bar{X} - 0.02	0.18 \bar{X} + 1.21
Chloroethane	0.99C - 1.53	0.14 \bar{X} - 0.13	0.17 \bar{X} + 0.63
2-Chloroethyl vinyl ether ^f	1.00C	0.20 \bar{X}	0.35 \bar{X}
Chloroform	0.93C - 0.39	0.13 \bar{X} + 0.15	0.19 \bar{X} - 0.02
Chloromethane	0.77C + 0.18	0.28 \bar{X} - 0.31	0.52 \bar{X} + 1.31
Dibromochloromethane	0.94C + 2.72	0.11 \bar{X} + 1.10	0.24 \bar{X} + 1.68
1,2-Dichlorobenzene	0.93C + 1.70	0.20 \bar{X} + 0.97	0.13 \bar{X} + 6.13
1,3-Dichlorobenzene	0.95C + 0.43	0.14 \bar{X} + 2.33	0.26 \bar{X} + 2.34
1,4-Dichlorobenzene	0.93C - 0.09	0.15 \bar{X} + 0.29	0.20 \bar{X} + 0.41
1,1-Dichloroethane	0.95C - 1.08	0.09 \bar{X} + 0.17	0.14 \bar{X} + 0.94
1,2-Dichloroethane	1.04C - 1.06	0.11 \bar{X} + 0.70	0.15 \bar{X} + 0.94
1,1-Dichloroethene	0.98C - 0.87	0.21 \bar{X} - 0.23	0.29 \bar{X} - 0.40
trans-1,2-Dichloroethene	0.97C - 0.16	0.11 \bar{X} + 1.46	0.17 \bar{X} + 1.46
1,2-Dichloropropane ^f	1.00C	0.13 \bar{X}	0.23 \bar{X}
cis-1,3-Dichloropropene ^f	1.00C	0.18 \bar{X}	0.32 \bar{X}
trans-1,3-Dichloropropene ^f	1.00C	0.18 \bar{X}	0.32 \bar{X}
Dichloromethane (Methylene chloride)	0.91C - 0.93	0.11 \bar{X} + 0.33	0.21 \bar{X} + 1.43
1,1,2,2-Tetrachloroethane	0.95C + 0.19	0.14 \bar{X} + 2.41	0.23 \bar{X} + 2.79
Tetrachloroethylene	0.94C + 0.06	0.14 \bar{X} + 0.38	0.18 \bar{X} + 2.21
1,1,1-Trichloroethane	0.90C - 0.16	0.15 \bar{X} + 0.04	0.20 \bar{X} + 0.37
1,1,2-Trichloroethane	0.86C + 0.30	0.13 \bar{X} - 0.14	0.19 \bar{X} + 0.67
Trichloroethylene	0.87C + 0.48	0.13 \bar{X} - 0.03	0.23 \bar{X} + 0.30
Trichlorofluoromethane	0.89C - 0.07	0.15 \bar{X} + 0.67	0.26 \bar{X} + 0.91
Vinyl chloride	0.97C - 0.36	0.13 \bar{X} + 0.65	0.27 \bar{X} + 0.40

^a X' = expected recovery for one or more measurements of a sample containing a concentration of C, in µg/L.

- b Expected single analyst standard deviation of measurements.
- c Expected interlaboratory standard deviation of measurements.
- d C = true value for the concentration, in $\mu\text{g/L}$.
- e \bar{X} = average recovery found for measurements of samples containing a concentration of C , in $\mu\text{g/L}$.
- f Estimates based on performance in a single laboratory.

References

APHA (American Public Health Association), 1985. **Standard Methods for the Examination of Water and Wastewater**, 16th edition. Washington, DC.

APHA (American Public Health Association), 1989. **Standard Methods for the Examination of Water and Wastewater**, 17th edition. Washington, DC.

ASTM (American Society for Testing and Materials), 1992. **1992 Annual Book of ASTM Standards**, Volume 11.02, Water (II). Philadelphia, PA.

EPA (U.S. Environmental Protection Agency), 1986. **Test Methods for Evaluating Solid Waste (SW-846)**, Volumes IA-IC. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1987. **Data Quality Objectives for Remedial Response Activities**. PB88-131870; EPA/540/G-87/003. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1988a. **Contract Laboratory Program Statement of Work for Inorganics Analysis, Multi-Media, Multi-Concentration**. SOW No. 788. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1988b. **Contract Laboratory Program Statement of Work for Organics Analysis, Multi-Media, Multi-Concentration**. SOW No. 288. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1990. **Guidance for Data Useability in Risk Assessment**. Interim Final. EPA/540/G-90/008. Washington, DC.

EPA (U.S. Environmental Protection Agency), 1991. *Guidelines Establishing Test Procedures for the Analysis of Pollutants, Code of Federal Regulations*, Title 40, Part 136, Appendix A. Revised July 1, 1991. Washington, DC.

EPA EMSL (U.S. Environmental Protection Agency, Environmental Monitoring and Systems Laboratory), 1979. **Handbook for Analytical Quality Control in Water and Waste-water Laboratories**. PB-297 451; EPA-600/4-79-019. Cincinnati, OH.

EPA EMSL (U.S. Environmental Protection Agency, Environmental Monitoring and Systems Laboratory), 1983. **Methods for Chemical Analysis of Water and Wastes**. Revised March 1983. Cincinnati, OH.

EPA EMSL (U.S. Environmental Protection Agency, Environmental Monitoring and Systems Laboratory), 1991. **Test Method, The Determination of Inorganic Anions in Water by Ion Chromatography—Method 300.0**. Revised August 1991. Cincinnati, OH.

**DATE
FILMED**

4 / 25 / 94

END

