

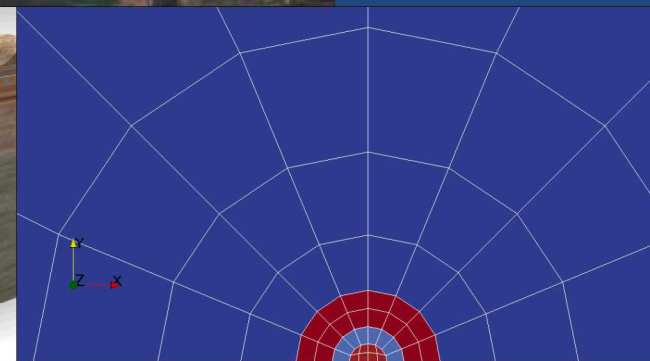


Borehole Disposal Workshop

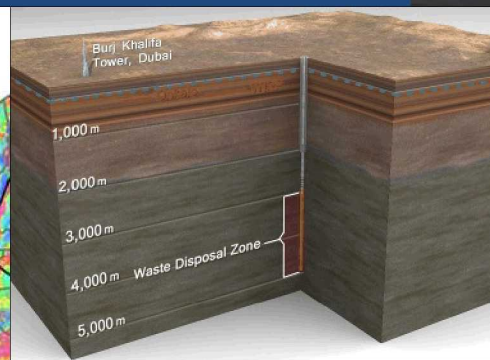

Part 5: Characterization

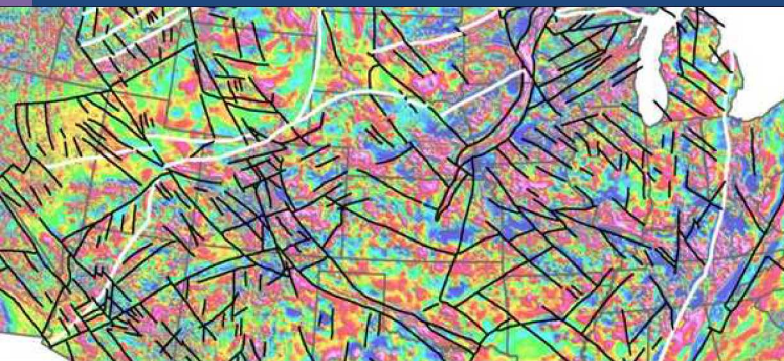


Sandia National Laboratories is a multi-mission laboratory managed and operated by National Technology and Engineering Solutions of Sandia LLC, a wholly owned subsidiary of Honeywell International Inc. for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-NA0003525.

SAND2018-XXXXPE

Characterization Borehole (CB)

- **Medium-Diameter Borehole**
 - Within current drilling experience
- **Testing/Sampling During Drilling**
 - Drilling mud logging (gas, liquid & solid)
 - Core in crystalline section
- **Testing/Sampling After Completion**
 - Packer tool via work-over rig
 - At limits of current technology
- **Demonstrate Ability to**
 - Perform in situ testing at high P & T
 - Build evidence for old groundwater

Borehole designed to maximize likelihood of good samples

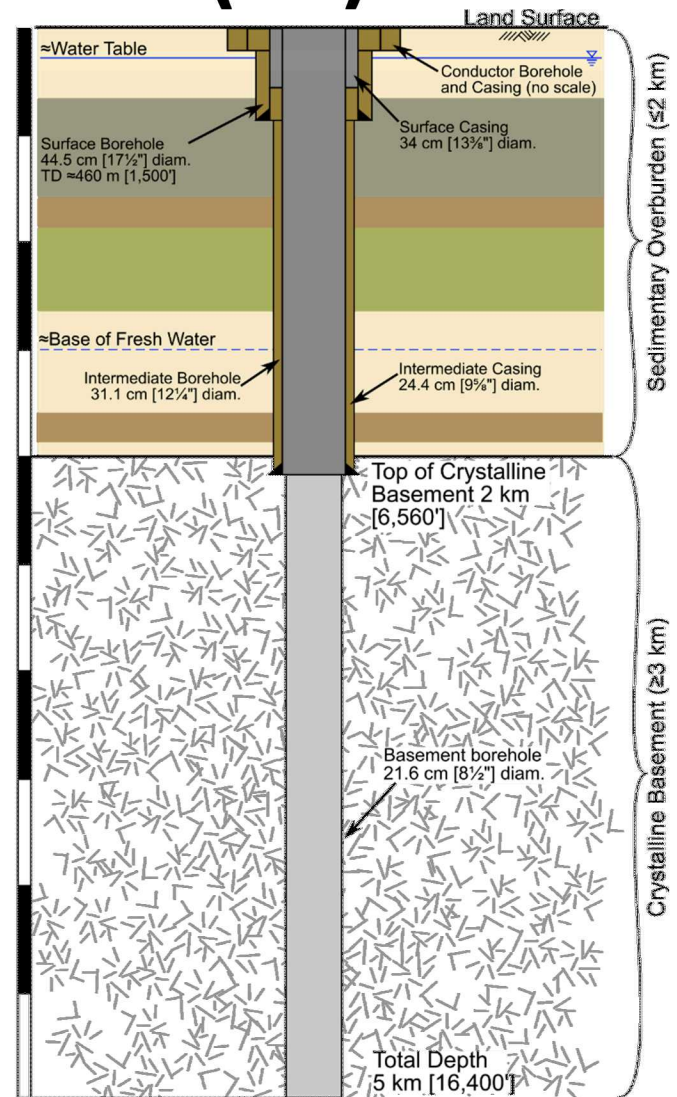


(SNL 2016) SAND2016-9235R

DBFT Laboratory and Borehole Testing Strategy

Field Test Borehole (FTB)


- **Large-Diameter Borehole**
 - Push envelope of drilling tech
- **Casing Schedule**
 - Continuous 13 $\frac{3}{8}$ " pathway to TD
 - Slotted & permanent in disposal interval
 - Removable in seal and overburden intervals
- **Demonstrate Ability to**
 - Emplace test packages
 - Remove test packages
 - Surface handling operations

Borehole designed to maximize emplacement safety

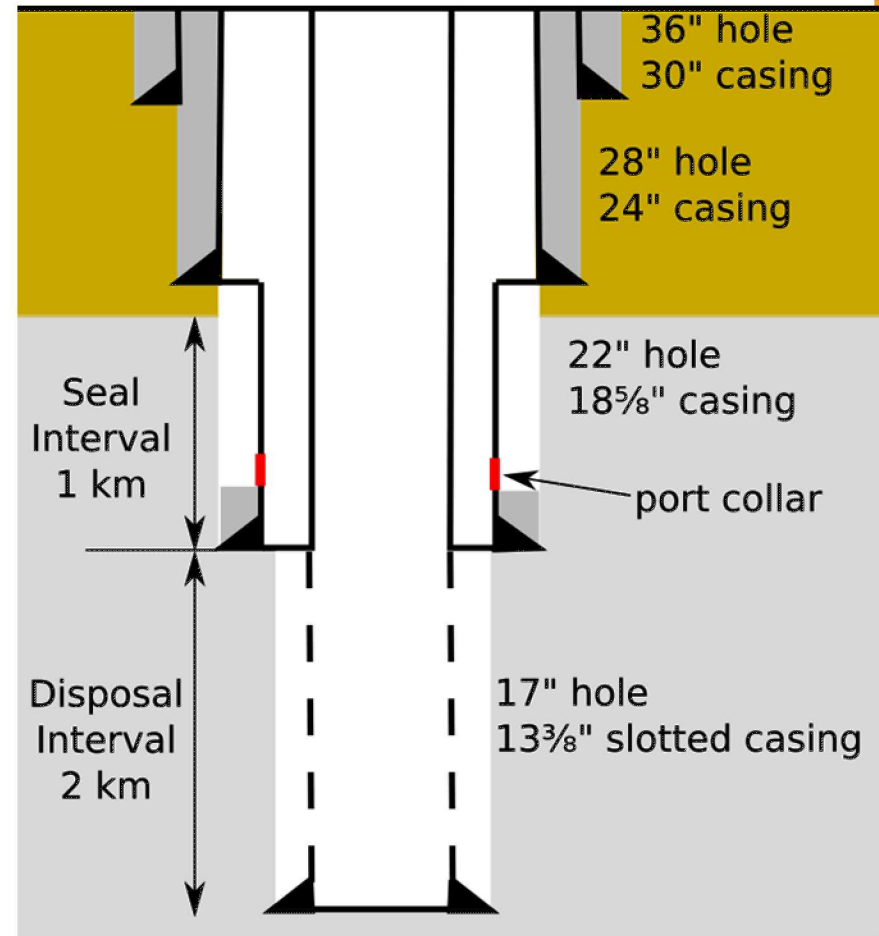


(SNL 2016) SAND2016-10246 R
Deep Borehole Field Test Conceptual Design Report

Basement Conceptual Profiles

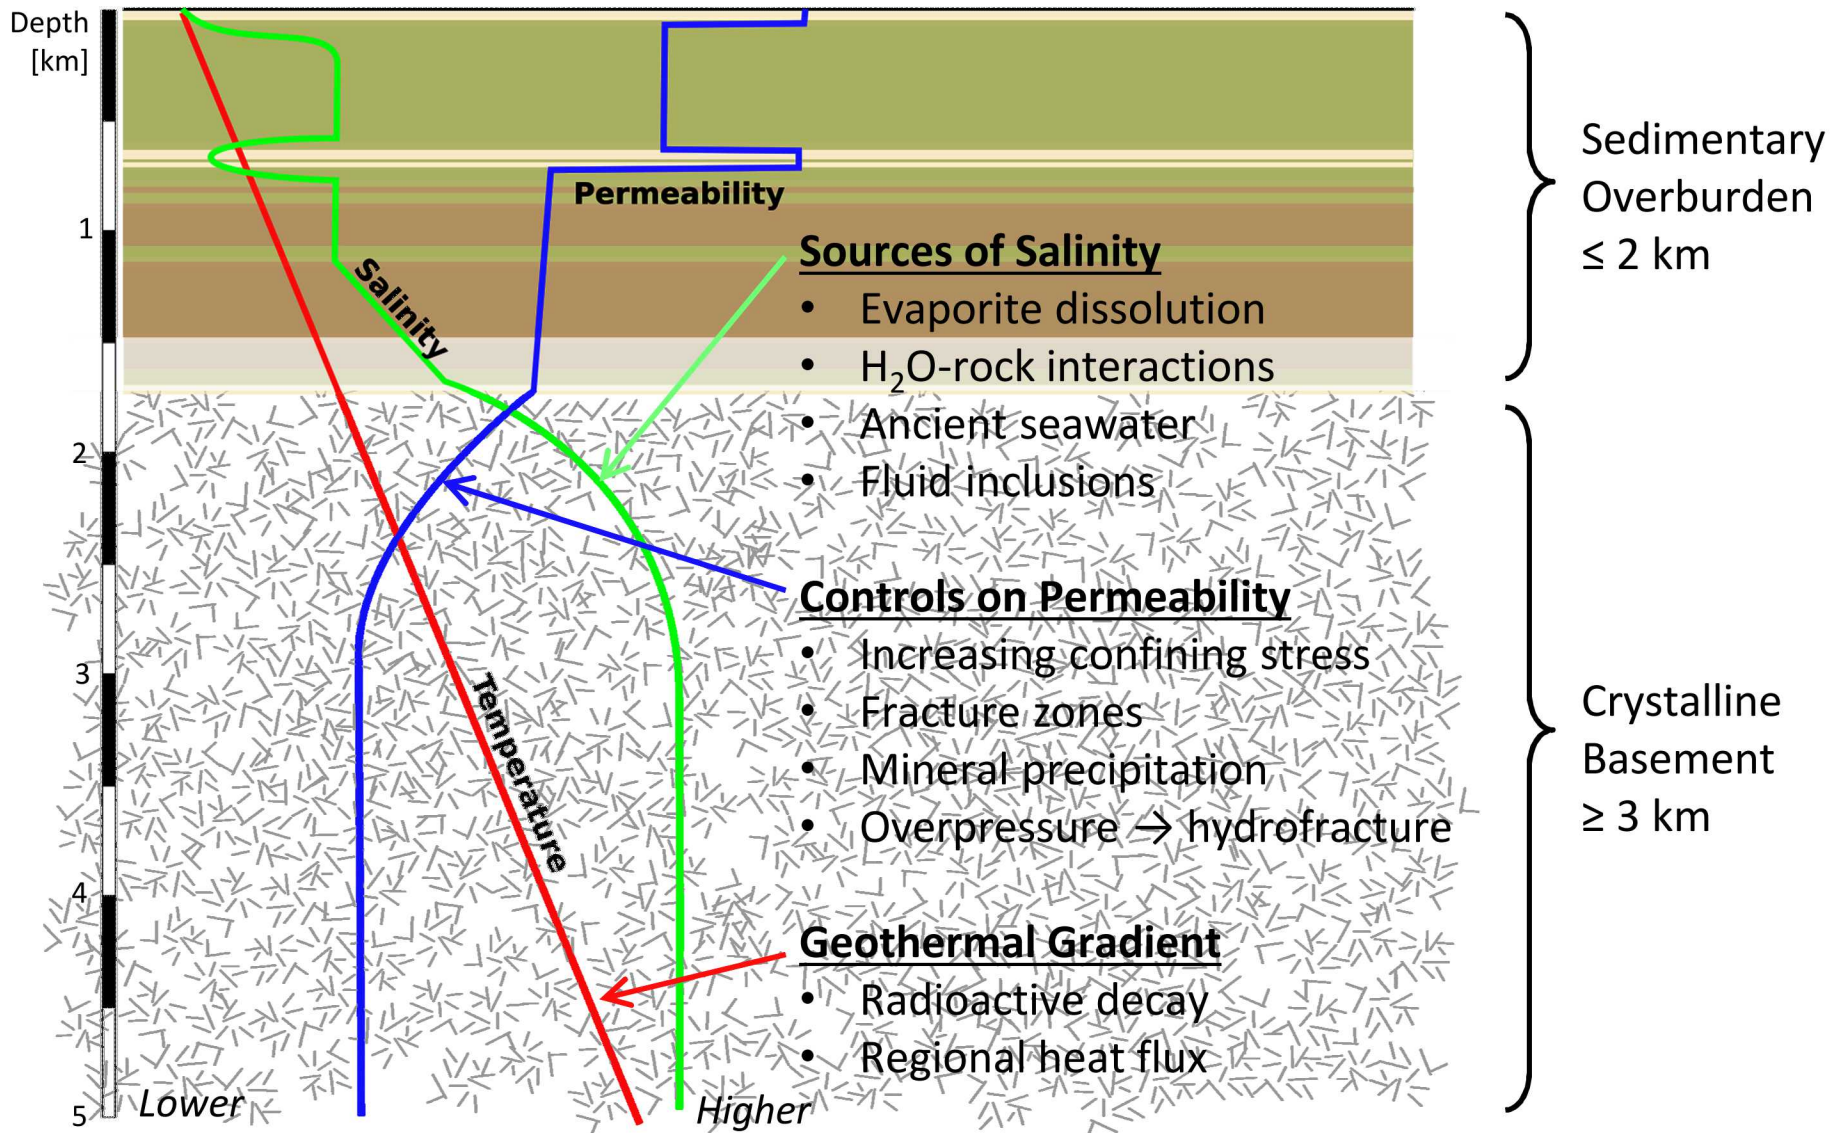


Observed Profiles


Salinity Increases with Depth

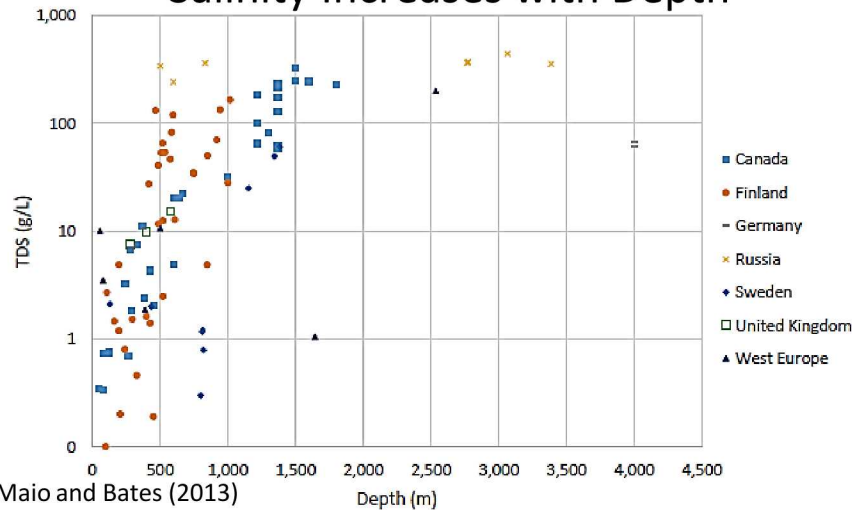

Bulk Permeability Decreases with Depth

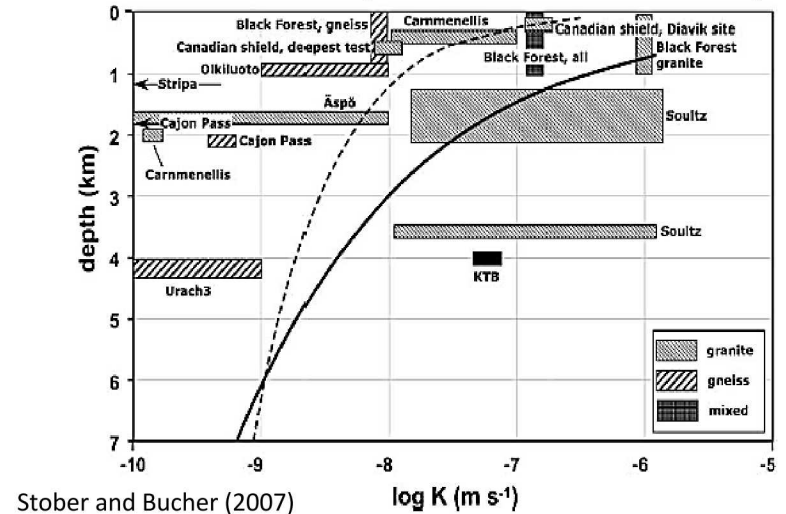


Bulk Permeability Increases with Scale

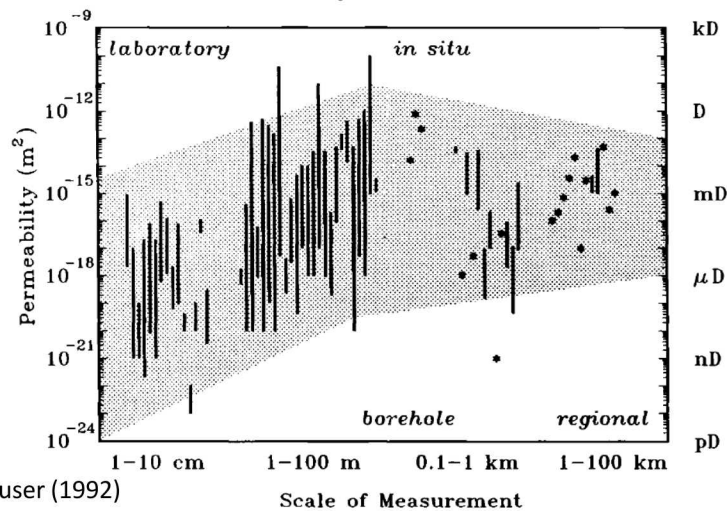

Chemical evidence for isolation is less prone to scale-dependency than permeability


Characterization Borehole (CB)

- Sampling During Drilling
- Borehole Geophysics
- Flowing Borehole Salinity Log
- Sample-based Profiles
 - Fluid density/temperature/major ions
 - Pumped samples from high- k regions
 - Samples from cores in low- k regions
- In Situ Testing-based Profiles
 - Formation hydraulic/transport properties
 - *In situ* stress (hydrofrac + breakouts)
- Exploring TRL of Methods
 - Not exhaustively testing a site for licensing
 - Workable at 50 Mpa / 150° C / 4 km tubing?
 - Compare methods under field conditions

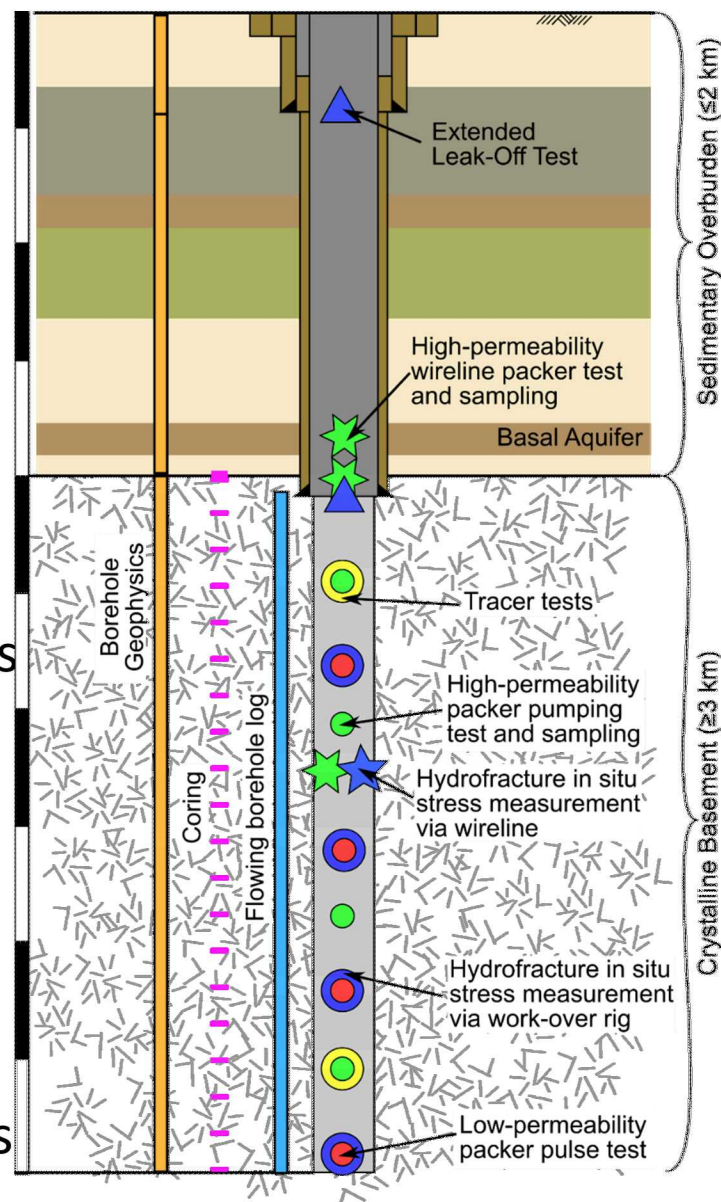


CB Characterization *During* Drilling

- **Mud logging (~continuous)**
 - Ion chromatograph (liquid)
 - Gas chromatograph (gas)
 - XRD/XRF rock flour (solids)
- **Fluid sampling (each ~30 m)**
 - Mud before & after circulation
 - Analytes
 - Drilling mud tracer (iodine, fluorescein)
 - C, S, N & stable water isotopes
 - Drilling mud additive
- **Advance Coring 5% (~150 m)**
- **Drilling parameters:**
 - rate, WOB, rotation speed, deviation, drilling specific energy, etc.

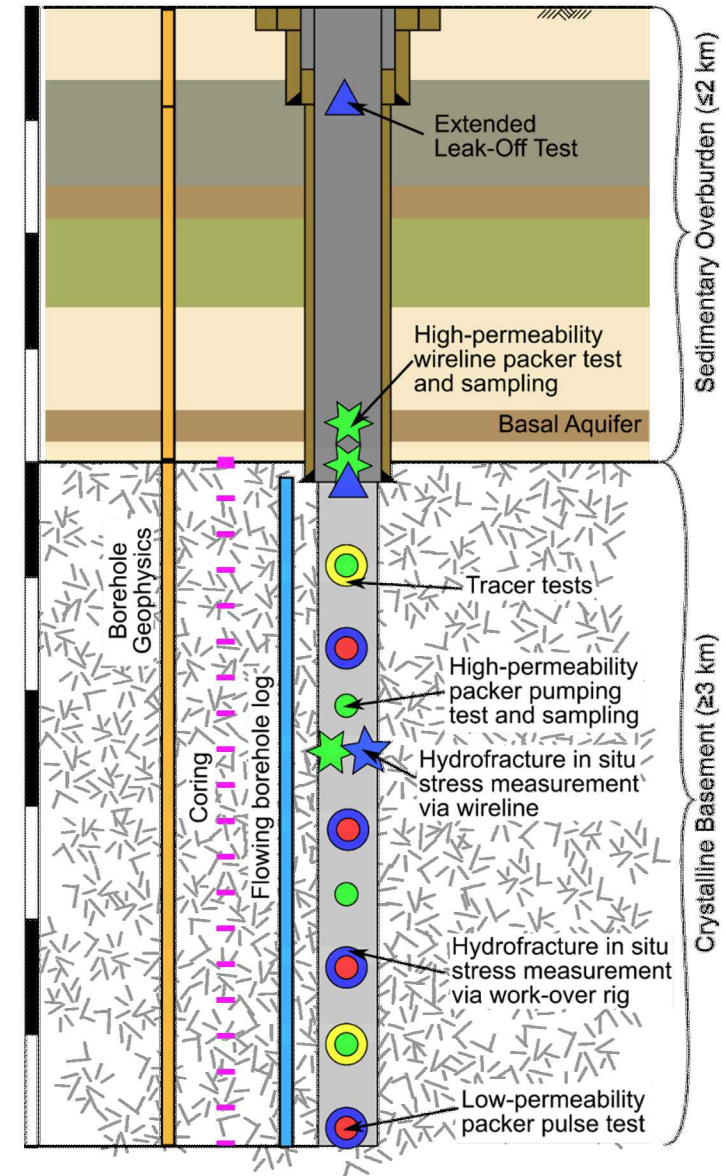


CB Testing After Drilling

- **Flowing Fluid Electrical Conductivity (FFEC) log**
- **Find:**
 - Permeable zones
 - Gaining zones
 - Losing zones
- **in situ packer testing focused to:**
 - 5 permeable zones
 - Formation fluid samples collected at surface
 - Estimate hydraulic properties
 - 5 low-permeability zones
 - Estimate hydraulic properties

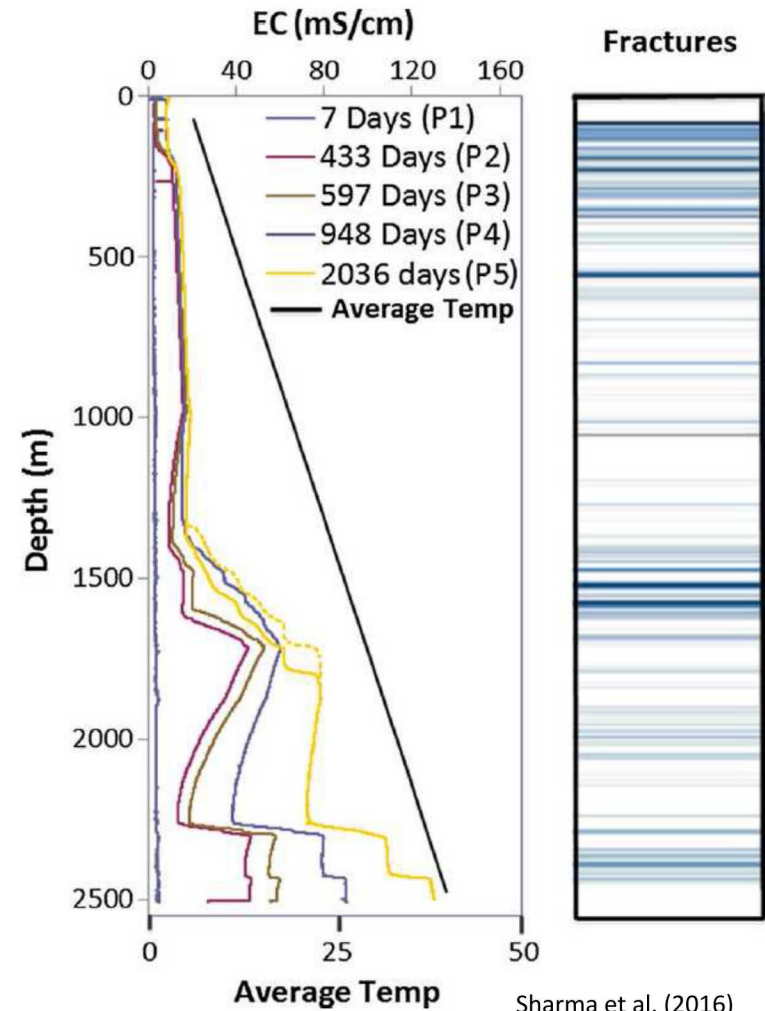

In Situ Packer-Based Testing

- **In Situ Packer Testing**
 - New hydromechanical dipole test:
 $k(p_{\text{packer}})$
- **Hydrologic Tests**
 - Static formation pressure
 - Permeability / compressibility / skin
 - Sampling in high k intervals
- **Tracer Tests**
 - Single-well injection-withdrawal
- **Hydraulic Fracturing Tests**
 - σ_h magnitude
 - Estimate stress tensor via existing fractures

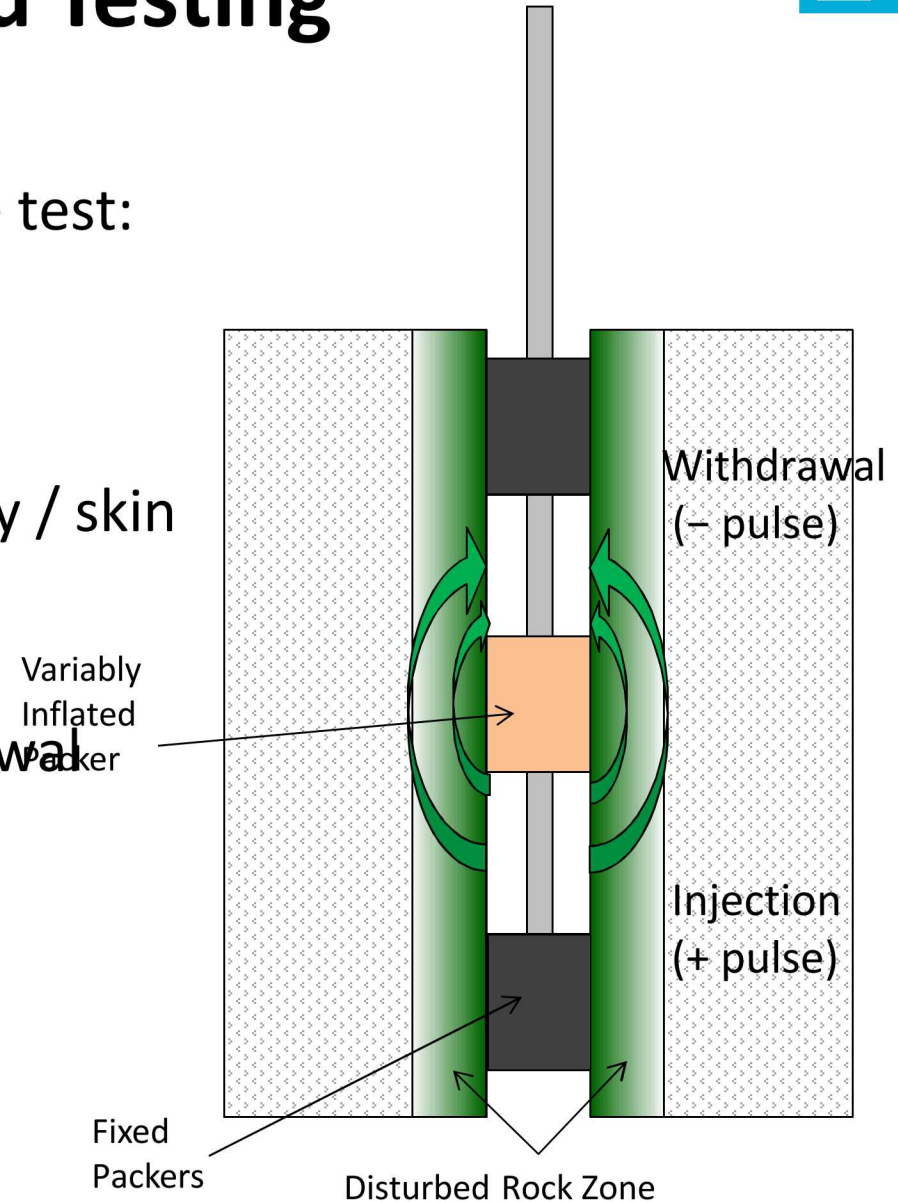

Environmental Tracers in Samples


- **Vertical Profiles**

- Noble gases (**He**, Ne, etc.)
- **Stable water isotopes**
 - Oxygen; hydrogen
- Atmospheric radioisotope tracers (e.g., ^{81}Kr , ^{129}I , ^{36}Cl)
- **$^{238}\text{U}/^{234}\text{U}$ ratios**
- **$^{87}\text{Sr}/^{86}\text{Sr}$ ratios**

- **Estimate**

- Water provenance
- Flow mechanisms/isolation

Minerals → pores → fractures (evaluate the “leakiness”)

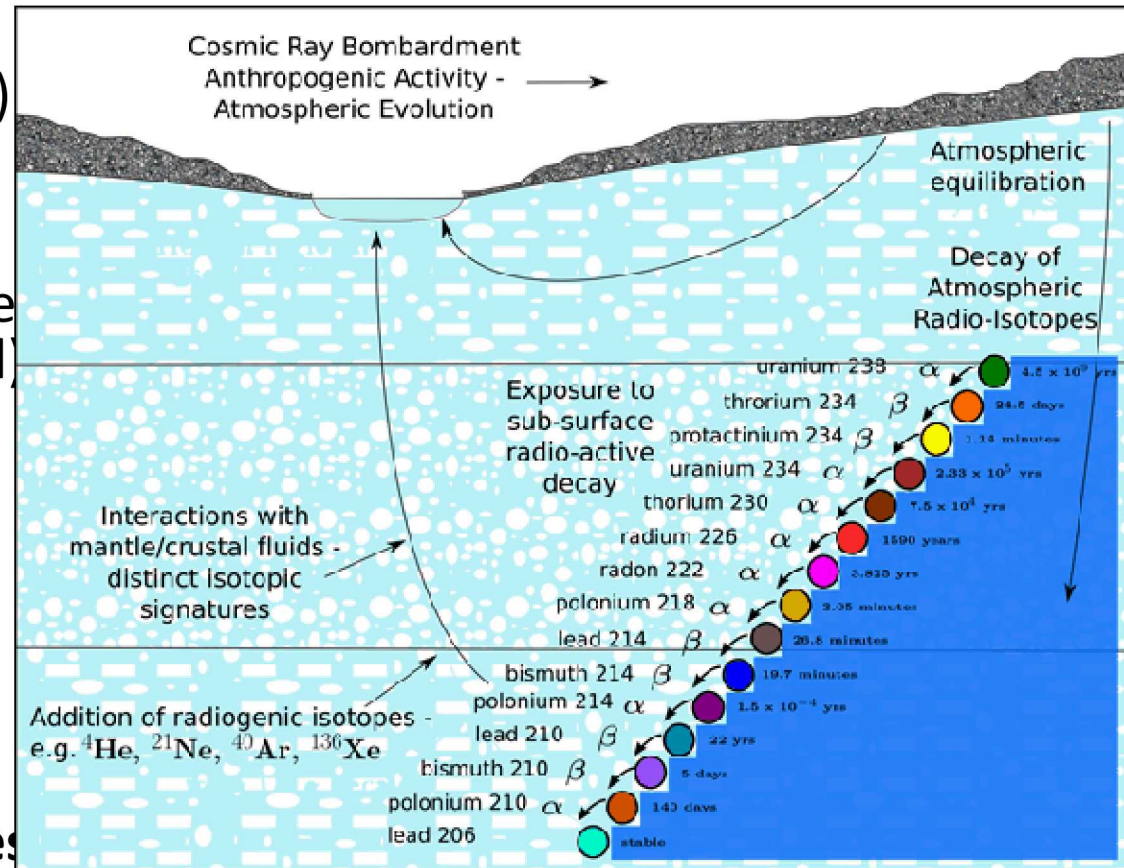

(After Kuhlman, 2015)

Fluid Sample Quality + Quantity *will be a Focus!*

Repeatability across drilling, packer & core samples?

Characterization Differences

- **DBFT Effort is Different from:**
 - Oil/gas or mineral exploration (low perm., low porosity rocks)
 - Geothermal exploration (low geothermal gradient)
 - Shallow drilling/testing (high p , high σ , deep, breakouts)
- **DBFT Characterization Approach**
 - Not exhaustive permeability characterization (scaling)
 - Seeking *geochemical* evidence of system isolation
- **DBFT Goals**
 - Drill straight large-diameter boreholes to 5 km depth
 - Demonstrate sample collection (cores + formation fluid)
 - Enough samples
 - Low enough contamination level
 - Demonstrate *in situ* testing at depth (3 to 5 km)
 - FTB Engineering demonstration of package hand

