



EGG-1183-1593  
Technical Report No. L-1107  
10 May 1973

RADIOLOGICAL SURVEY OF  
THE AREA SURROUNDING  
THE PEACH BOTTOM ATOMIC POWER STATION  
PEACH BOTTOM, PENNSYLVANIA  
DATE OF SURVEY: 5, 7, 9, 11 AUGUST 1969

Approved for Publication

A handwritten signature of John F. Doyle.

John F. Doyle, Manager  
Aerial Surveillance Department

A handwritten signature of Clyde Jupiter.

Clyde Jupiter, Manager  
Radiation and Environmental Sciences Department

This Document is  
UNCLASSIFIED

A handwritten signature of G. P. Stohle.

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED

A handwritten signature of G. P. Stohle.

Classification Officer

NOTICE

This report contains information of a preliminary nature and is furnished initially for internal use at the originating installation. It is subject to revision or correction and therefore does not represent a final report. It is passed to the recipient in confidence and should not be abstracted or further disclosed without the approval of the originating installation or DTI Extension, Oak Ridge.

NOTICE

This report was prepared as an account of work sponsored by the United States Government. Neither the United States nor the United States Atomic Energy Commission, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed, or represents that its use would not infringe privately owned rights.

Prepared for the U.S. Atomic Energy Commission Under Contract No. AT(29-1)-1183

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED  
TO AEC OFFICES AND AEC CONTRACTORS

A handwritten signature of G. P. Stohle.

## **DISCLAIMER**

**This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.**

---

## **DISCLAIMER**

**Portions of this document may be illegible in electronic image products. Images are produced from the best available original document.**

WORK PERFORMED BY

Analyst

M. D. Sevart

Instrumentation Specialist

R. J. Mazurkewiz

Navigator

W. F. Verheyden

Pilot

E. D. Shultz

## ABSTRACT

The Aerial Radiological Measuring System (ARMS) was used to survey the area surrounding the Peach Bottom Atomic Power Station during August 1969. The survey measured terrestrial background gamma radiation.

A high-sensitivity detection system collected gamma-ray spectral and gross-count data. The data were then computer processed into a map of an 800 square mile area showing isoexposure contours three feet above the ground. Exposure rates and isotopes identified are consistent with normal terrestrial background radiation.

## ACKNOWLEDGMENTS

Special appreciation is given to L. J. Deal (Assistant Director, DOS/Health Protection, USAEC) and to Dr. Charles Pelletier (Chief, Environmental Inspection Branch, Regulatory Operations, USAEC) for their support and encouragement in this program.

## CONTENTS

1.	INTRODUCTION	1
1.1	Identification of Surveyed Plant and Area	1
1.2	ARMS Program	1
1.3	ARMS Equipment and Procedures	1
1.4	Reduction and Presentation of Data	4
2.	REACTOR AND SITE CHARACTERISTICS	5
2.1	Reactor Characteristics	5
2.2	Site Area Characteristics	6
3.	SURVEY PLAN	8
3.1	Specification of Flight Lines	8
3.2	Coordination with Local Authorities	8
4.	RADIOLOGICAL SURVEY	9
4.1	Survey Missions	9
4.2	Gross-Count Data	9
4.3	Spectral Data	9
5.	SUMMARY AND CONCLUSIONS	14

## 1. INTRODUCTION

### 1.1 Identification of Surveyed Plant and Area

The Aerial Radiological Measuring System (ARMS) (Ref. 1) operated by EG&G, Inc., Las Vegas, Nevada, for the U. S. Atomic Energy Commission was used to perform a gamma radiation survey of an extensive area surrounding the Peach Bottom Atomic Power Station during August 1969. The Peach Bottom Station, operated by the Philadelphia Electric Company, is located near Peach Bottom, Pennsylvania. The size of the survey area was 800 square miles.

### 1.2 ARMS Program

The present survey was made as part of a continuing nationwide ARMS program started in 1958 to monitor radiation levels surrounding facilities producing or utilizing radioactive materials. This is the first such survey performed in the Peach Bottom area since the station began operation in 1966.

The detection system on board the aircraft collects gamma-ray gross-count and spectral data on each flight line of the survey. The gamma radiation and aircraft position information are processed by a computer into an isoexposure contour map of the area surveyed.

### 1.3 ARMS Equipment and Procedures

The ARMS aircraft and its on-board radiation detection equipment were used in the survey. Since the ARMS equipment and procedures have been discussed in detail elsewhere (Ref. 1), they will only be described briefly here.

The ARMS surveys are flown in a Beechcraft Twin Bonanza at an altitude of 300 to 500 feet above terrain and a ground speed of about 140 knots (235 ft/sec). The ground position of the aircraft and its altitude above terrain are measured and recorded every other second by a radar navigation computer system. The position and altitude measurements are accurate to  $\pm$  350 ft and  $\pm$  5 ft, respectively.

A typical flight pattern consists of a series of parallel lines spaced one nautical mile (6080 feet) apart, covering all of the land area within a twelve and one-half nautical mile radius of the facility.

At an altitude of 300 feet the field of view of the detectors is approximately 1/4 mile wide for a mean gamma energy of naturally occurring isotopes.

The aerial radiation measurements are of two distinct types, made simultaneously: (1) gross gamma count (intensity) measurements and (2) gamma spectral measurements. The detector system consists of an array of fourteen 4 x 4 in. NaI (Tl) scintillation crystals, each coupled to its own photomultiplier assembly. The detector system output is directed both to the gross gamma count computing system and to the multichannel spectrum analyzer. The data collecting system is shown in Figure 1.

The gross gamma count system consists of an amplifier-discriminator-computer unit that counts and records the total number of gamma-rays of energy greater than 50 keV that are detected during a 1-second time interval. The gross gamma count rate (number of gamma-rays detected per second) is digitally recorded along with aircraft position and altitude every other second. Aircraft position data are supplied by a track navigational computer and doppler radar. Altitude above terrain is measured with a radar altimeter. As a backup and complement to the digital recording of the gross-count data, a record is made on a continuous strip chart of both gross gamma count rate and radar altitude as a function of distance. Typical gross-count rates for natural background are several thousand per second.

Whereas the gross gamma count data specify the intensity of radiation as a function of position, the gamma spectral data are useful in identifying particular radioactive isotopes. A pulse-height analyzer automatically sorts detected gamma-rays according to energy, thereby generating a number per unit-energy versus energy spectrum. Although gamma rays occur only at well known discrete energies characteristic of the emitting species, air scattering tends to smear the detected distribution. Nevertheless, the characteristic peaks that permit isotope identification are readily observable. In wide area surveys the typical acquisition time for a gamma-ray spectrum is several minutes; thus the spectrum represents the average radiological properties of a tract several miles in length. However, if an area of interest is indicated by an increase in the gross gamma count rate, spectral data acquisition times of only a few seconds are used to isolate the area spatially. If further investigation is warranted, a ground mobile unit with equipment similar to that in the aircraft is available to provide greater spatial and energy resolution.

In addition to the equipment just described, the ARMS aircraft also carries an air sampling and analysis system for the measurement of airborne radioactivity.

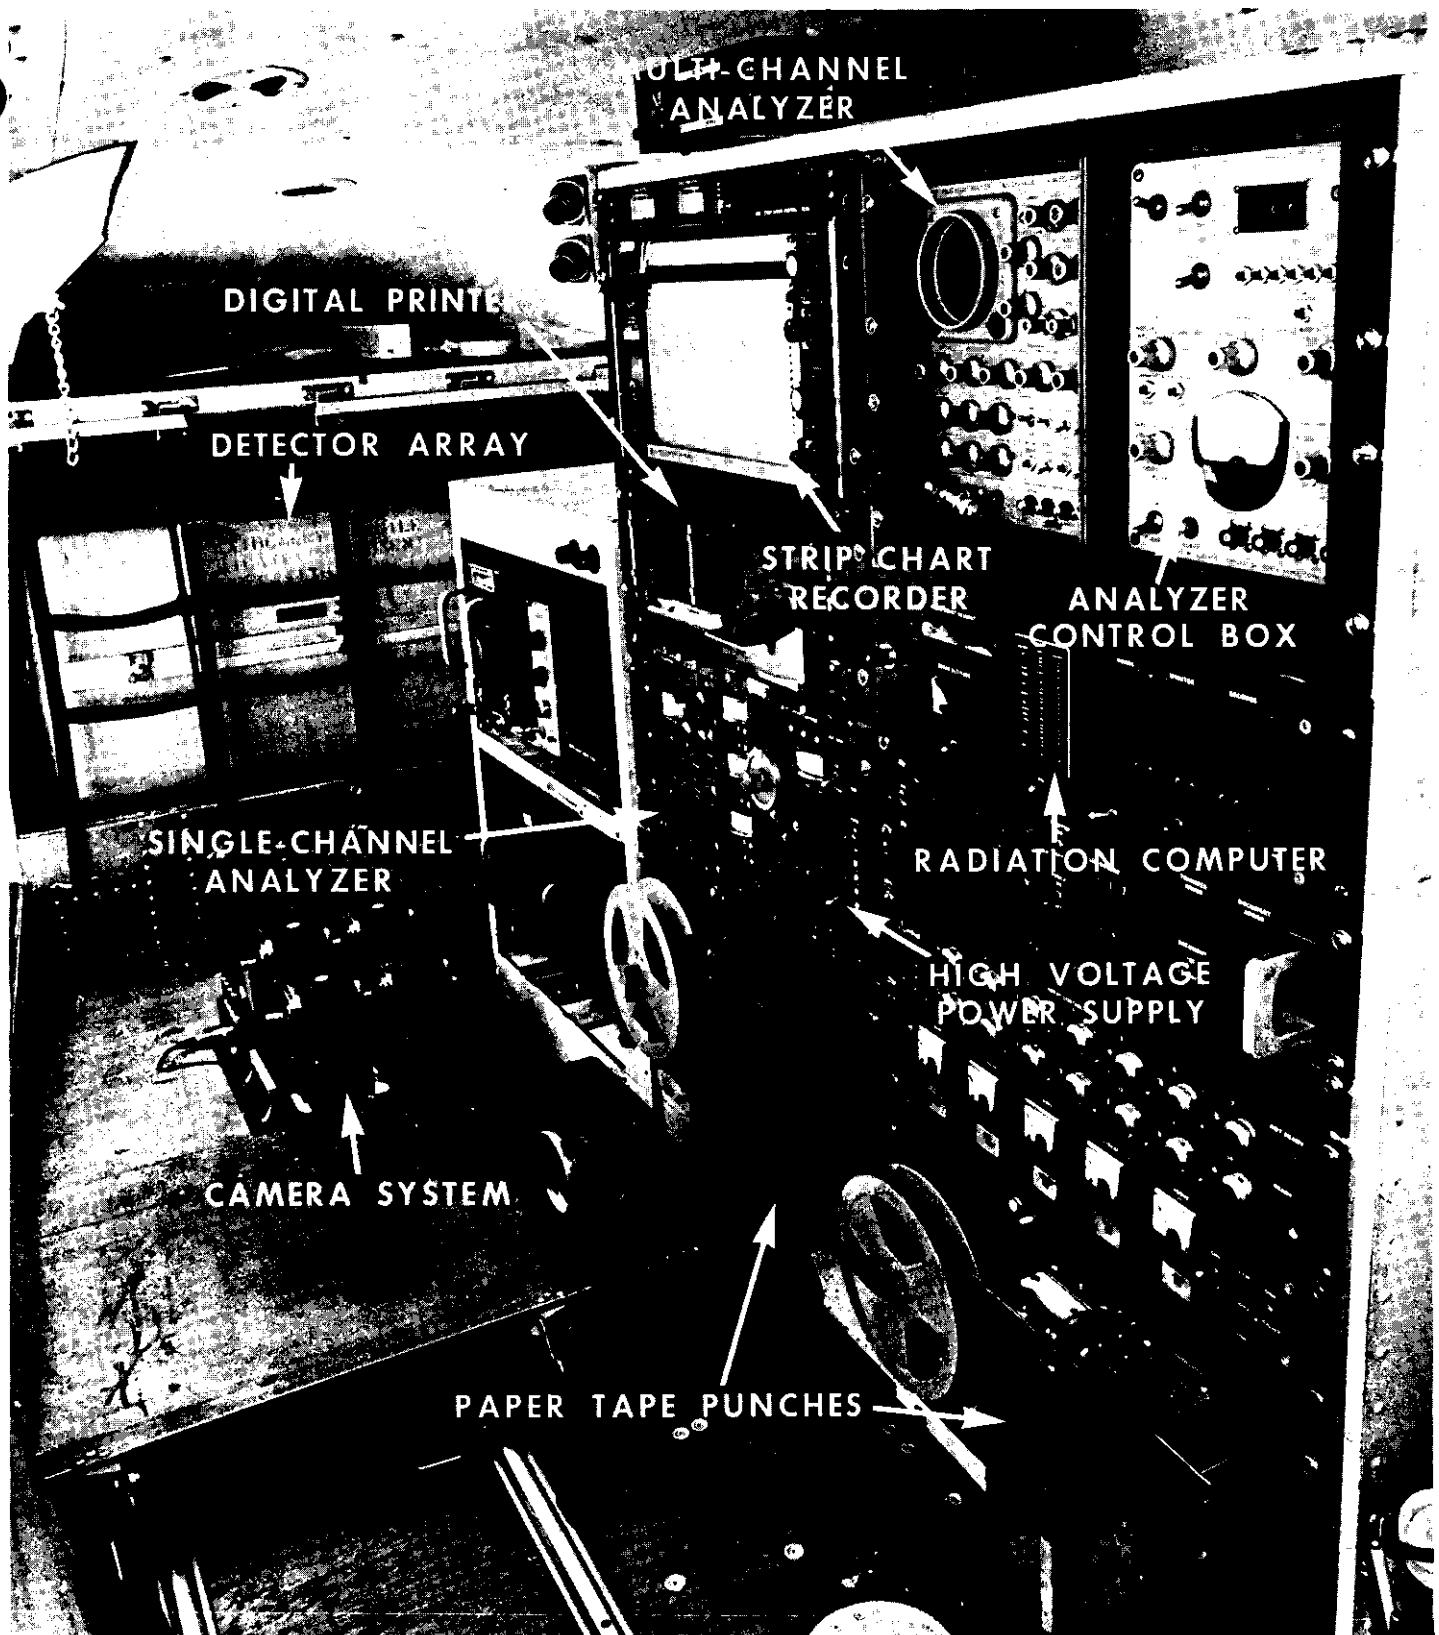


FIGURE 1. View of the interior of the Aerial Radiological Measuring System (ARMS) aircraft showing detector package and electronic data collection system.

#### 1.4 Reduction and Presentation of Data

The raw data from the gross gamma count and the gamma spectral measurements are permanently recorded on paper tape, which is computer processed and analyzed to characterize the radiological properties of the area surveyed. Using an altitude-dependent conversion factor obtained from prior calibration measurements, the raw gross-count rate is converted to exposure rate ( $\mu\text{R}/\text{hr}$ ) at three feet above ground.

The exposure rate conversion factor was obtained from repeated flights 200 to 1000 feet above terrain containing known distributions of natural isotopes. Such conversion factors have proved valid over distributed fission product fields, with a variation of less than 25%. In practice, variations of 2  $\mu\text{R}/\text{hr}$  or greater can be reliably observed in repeated flights over the same area.

## 2. REACTOR AND SITE CHARACTERISTICS

### 2.1 Reactor Characteristics

The Peach Bottom Reactor is located in York County, Pennsylvania, five miles northwest of the town of Peach Bottom.

The principal nuclear contractor is Gulf General Atomic, Inc. The facility is operated by the Philadelphia Electric Company.

Table 1 gives the specifications of the reactor facility at the time of the survey.

TABLE 1. Reactor facility specifications.

Reactor Unit	Reactor Type	Start-Up Date	Power Levels (Megawatts)		Status
			Electrical	Thermal	
1	Gas cooled, graphite moderated	1966	40	115	Non-operating

2.2 Site Area Characteristics

In general the terrain in the survey area is moderately wooded rolling country. The most prominent terrain feature is the Susquehanna River, which runs through the center of the area.

Table 2 lists the towns in the survey area with significant populations, by distance and direction from the reactor site.

TABLE 2. Principal population centers within the Peach Bottom area.

Town	Direction from Power Station	Population *		
		Distance from Station (Miles)		
		0 - 5	5 - 10	10 - 15
Delta, Pa.	S	778		
Fawn Creek, Pa.	SW		485	
Millersville, Pa.	NNW			6,396
Oxford, Pa.	E			3,658
Quarryville, Pa.	NNE			1,571
Rising Sun, Md.	SE			956
Strasburg, Pa.	NNE			1,897
Totals		778	485	14,478
Grand Total				15,741

\* 1970 census figures (Ref. 2).

### 3. SURVEY PLAN

#### 3.1 Specification of Flight Lines

The flight pattern for the Peach Bottom survey consisted of 25 flight lines approximately 25 nautical miles long and spaced one nautical mile apart. The lines were oriented in a north-south direction. Radiation data together with aircraft position and meteorological information were collected along each flight line. The area covered by the survey was about 600 square nautical miles, or 800 square statute miles.

#### 3.2 Coordination with Local Authorities

ARMS survey missions are conducted under special waiver from the Federal Aviation Administration. The survey plan was discussed with the appropriate General Aviation District Office, and public announcements were published in the local newspapers prior to the survey operation in accordance with the FAA waiver for low-level flights.

The base of operations for the survey mission was Hagerstown, Maryland.

## 4. RADIOLOGICAL SURVEY

### 4.1 Survey Missions

The aerial survey of the Peach Bottom area was conducted on 5, 7, 9, and 11 August 1969. This survey required a total flying time of 16 hours.

Gamma gross-count and spectral data were simultaneously collected at an altitude of 300 feet. Spectra were accumulated over 4-minute intervals during which the aircraft traveled approximately 12 miles; consequently two spectra per line were collected.

### 4.2 Gross-Count Data


As a first step in the analysis of the gross-count data, the background due to nonterrestrial radiation was subtracted. This background consists of cosmic-ray, aircraft, and airborne radioactivity contributions (Ref. 2). After correction for background, the data were normalized to a standard air mass. The resultant net-count data were then converted to exposure rate in microroentgens per hour ( $\mu\text{R}/\text{hr}$ ) at the 3-foot level above the ground. The cosmic-ray exposure rate was then added back to the terrestrial exposure rate. Finally, the composite exposure rate data, together with aircraft position information, were processed into an isoexposure contour map for overlay on U. S. Geological Survey topographic maps of the survey area.

An isoexposure map of the Peach Bottom area is shown in Figure 2. The data shown on the map include a cosmic radiation contribution of 2 to 4  $\mu\text{R}/\text{hr}$ . Spatial resolution of the exposure rate data is determined by the field of view of the detector system, which is about 1/4 mile.

### 4.3 Spectral Data

Spectral data were recorded from about 0.03 to 3.0 MeV. The recording system was calibrated prior to takeoff with an yttrium-88 source, which emits two prominent gamma-rays of 0.898 and 1.836 MeV. The gain for each crystal in the 14-crystal detector array was set independently.

**GAMMA EXPOSURE RATE CONTOURS  
PEACH BOTTOM ATOMIC POWER STATION, PENNSYLVANIA  
AUGUST 1969**

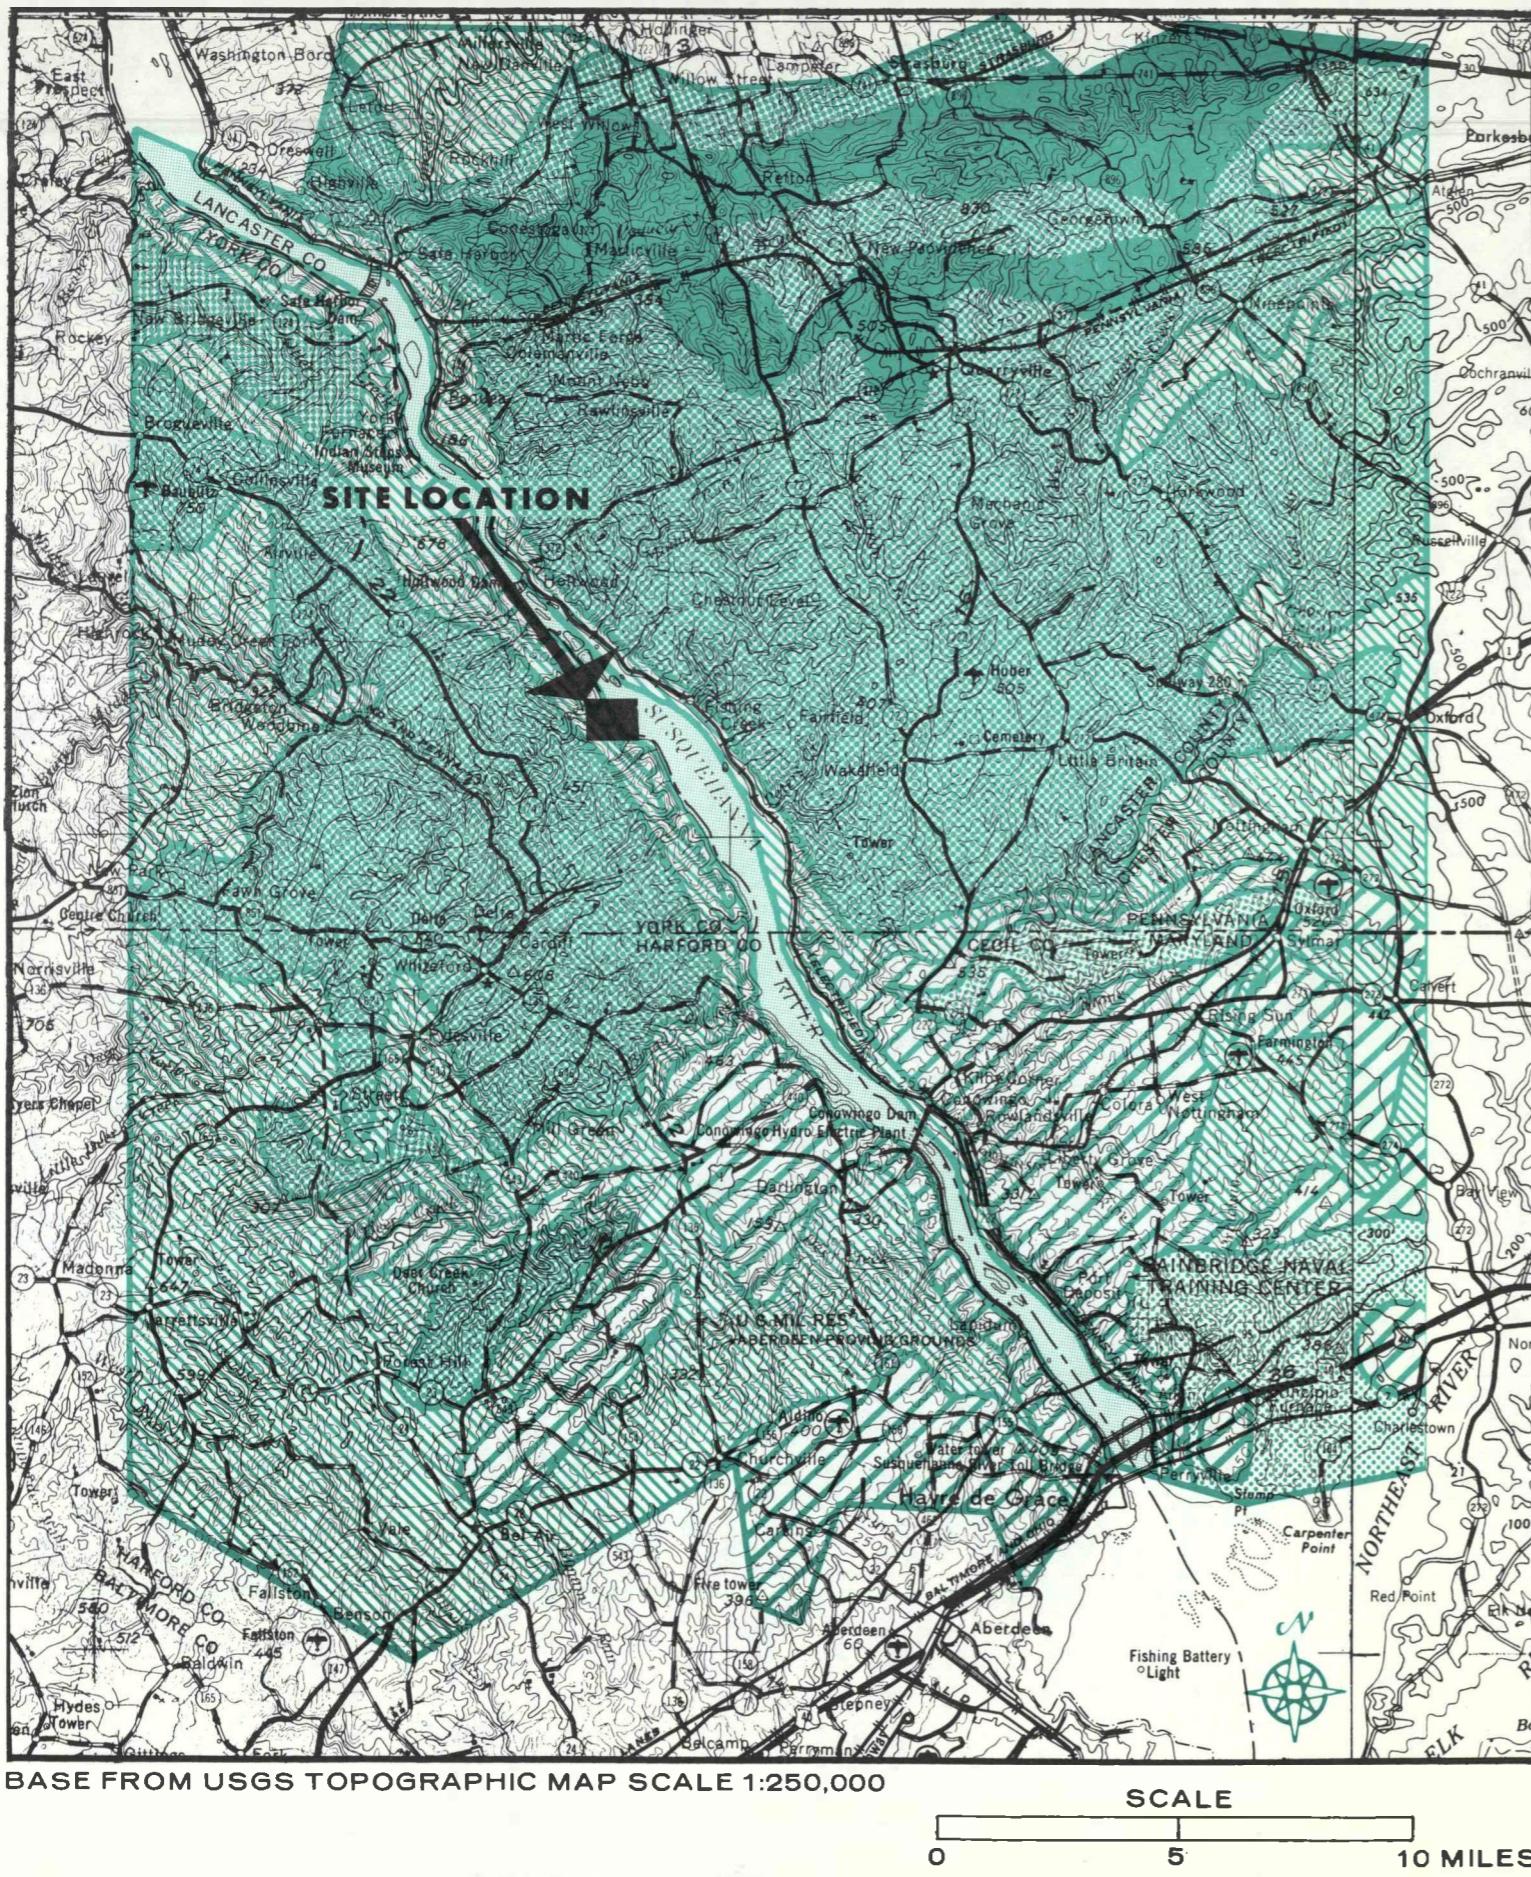

**LEGEND**

2-4  $\mu\text{R}/\text{hr}$




4-6  $\mu\text{R}/\text{hr}$



6-8  $\mu\text{R}/\text{hr}$



8-10  $\mu\text{R}/\text{hr}$

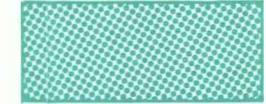

10-12  $\mu\text{R}/\text{hr}$



12-14  $\mu\text{R}/\text{hr}$

Figure 2.

A spectrum typical of those taken during the survey is shown in Figure 3. Table 3 lists the prominent gamma-ray energies and associated source isotopes identified in the spectrum. Differences in shape between spectra taken over different portions of the survey area are minor, and the isotopes identified in all spectra are the same. Only isotopes consistent with normal background radiation are apparent.

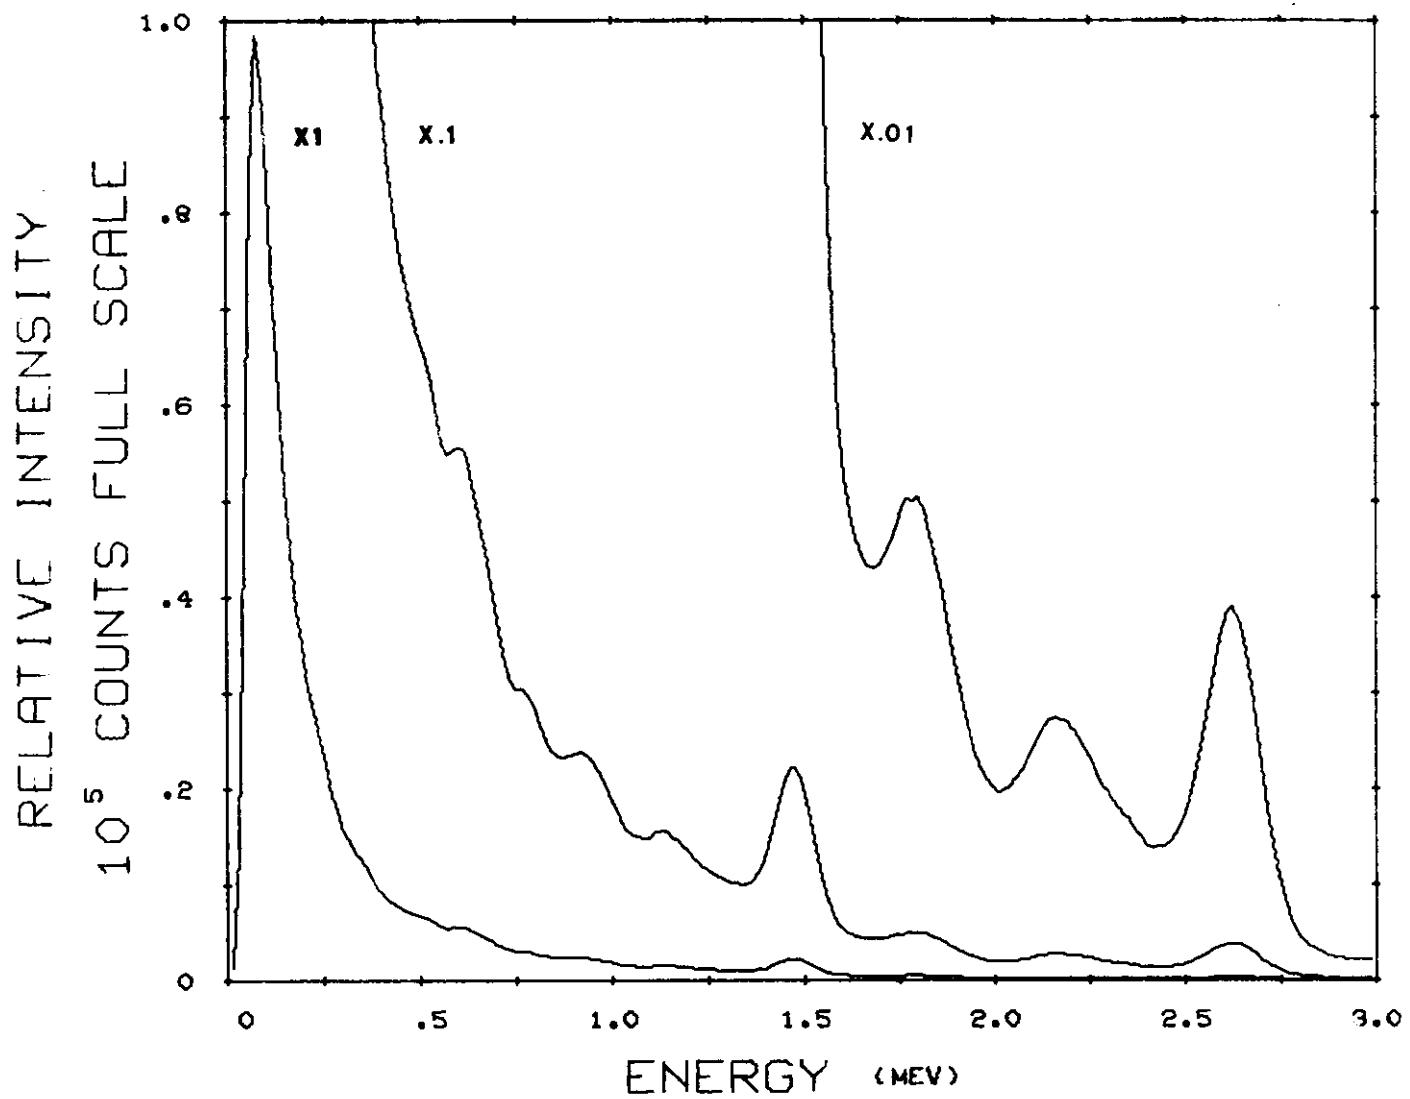


FIGURE 3. Typical gamma spectrum for survey area.

TABLE 3. Gamma-ray energies and isotopes consistent with spectral data of Figure 3.

Observed Energy (MeV)	Radionuclides Consistent With Spectral Photopeaks						
	Fission Products			Activation Products		Terrestrial Background	
0.35	.	.	.	.	.	.	Pb-214
0.51	.	.	.	.	.	.	Annihilation
0.61	.	.	.	.	.	.	Bi-214
0.76	.	.	.	.	.	.	Bi-214
0.93	.	.	.	.	.	.	Bi-214
1.12	.	.	.	.	.	.	Bi-214
1.46	.	.	.	.	.	.	K-40
1.76	.	.	.	.	.	.	Bi-214
2.20	.	.	.	.	.	.	Bi-214
2.62	.	.	.	.	.	.	Tl-208

## 5. SUMMARY AND CONCLUSIONS

The gamma exposure rates and radioactive isotopes revealed in the survey of the area surrounding the Peach Bottom Station are consistent with normal terrestrial background radiation. No significant anomalies were detected that could be attributed to reactor operations.

The 3-foot level exposure rates mapped during the survey were mostly in the 6 to 12  $\mu\text{R}/\text{hr}$  range.

## REFERENCES

1. "Aerial Radiological Measuring Systems (ARMS) - Systems and Procedures Employed Through FY71," AEC Report No. ARMS-71. 6, in preparation.
2. 1970 Census of Population, Advance Reports PC(VI)-40 and PC(VI)-22, U. S. Dept. of Commerce, Bureau of Census, Jan. 1971.
3. Burson, Z. G., Boyns, P. K., and Fritzsche, A. E., "Technical Procedures for Characterizing the Terrestrial Gamma Radiation Environment by Aerial Surveys," EG&G/LVAO Report No. 1183-1559, 1972.

DISTRIBUTION

AEC/DOS

L. J. Deal (15)

AEC/NV

J. A. Koch  
R. R. Loux  
R. B. Purcell

AEC/TIC

Librarian (2)

EG&G/LVAO

Aerial Surveillance Dept. (30)

EG&G/SBD

H. A. Lamonds